


# Q Kitchen Appliance COLLECTION II 2018

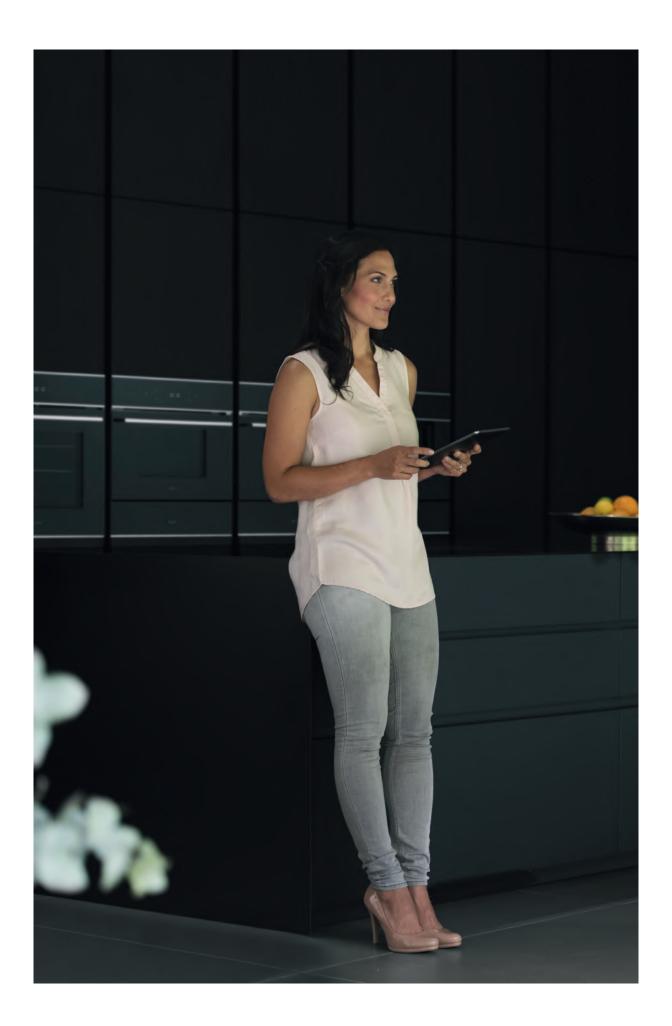

## CONTENTS

## COOKING

OVENS	9
STEAM OVENS	33
MICROWAVES	41
COFFEE MACHINES	51
WARMING AND STORAGE DRAWERS	$5_7$
HOBS	63
EXTRACTION	95
VENTING	144
SPLASHBACKS	147

## COOLING

PROFESSIONAL REFRIGERATION	156
FREESTANDING REFRIGERATION	158
INTEGRATED REFRIGERATION	165
WINE CABINETS	177

## WASHING

DISHWASHERS	207
WASHING MACHINES	216
WASHER DRYER	218
TUMBLE DRYERS	220
PLINTH HEATERS	222

	222
FOOD WASTE DISPOSAL	224
INSTALLATION DIAGRAMS	226
CAPLE CARE	256



# Making functionality fashionable

Beautiful, functional and technologically advanced, Caple appliances are central to the concept of a contemporary kitchen. From super sleek induction hobs to discretely effective cooker hoods, whisper quiet dishwashers and smart [in every sense] wine cabinets, they cater for every lifestyle.

Chef, entertainer, home maker? Whatever your passion Caple provides the inspiration to carry it off with exceptional style. Our range offers the depth and versatility to seamlessly integrate into your kitchen, whatever its design or layout. Discover exciting new ways to cook, cool or wash, but above all, bring out the beating heart of your home.



## COOKING

6

Ovens	9
Steam Ovens	33
Microwaves	41
Coffee Machines	51
Warming and Storage Drawers	57
Hobs	63
Extraction	95
Venting	144
Splashbacks	147



## Ovens

There's a Caple oven for every kind of kitchen and every type of lifestyle. Choose from our flagship Sense Premium collection, the sleek and elegant SENSE range and our exceptionally versatile Classic family. 8 9 OVENS

COOKING

## SENSE PREMIUM OVENS

Our collection of Sense Premium ovens boasts elegant design and class leading functionality, putting uncompromising control at your fingertips.

Stunning grey interiors bring style to your cooking. Sleek LED-lit touch controls and programming allow you to rise to the occasion and effortlessly set your oven to work.

#### THE PIZZA FUNCTION

The C2481SS reaches  $350^{\circ}$ C meaning you can cook two fresh pizzas to perfection in under three minutes.

#### SEAMLESS DESIGN

Create beautiful clean lines in any kitchen with carefully crafted matching products.



TOUCH CONTROL

#### FINGERPRINT RESISTANT STAINLESS STEEL



#### **SELF-CLEANING TECHNOLOGY**

The C2481SS Pyrolytic technology works by heating the oven to 475°C, causing even hidden and baked-on grime to carbonise into a fine ash. It saves you vast amounts of elbow grease, and actually improves oven efficiency over time too.



#### EASY CLEAN

A clever clean function returns your oven to a fresh and spotless condition in just 60 minutes, taking advantage of special enamel with a micro-porous structure to oxidise residues at 250°C.



#### **TELESCOPIC SHELVES**

Look out for models with telescopic shelves, making it easier and safer to check food as it cooks.

#### BOOST

The Boost function, which preheats the oven in super quick time, makes sure it reaches just the right temperature rapidly.



Sp Look out for products marked with Sense Premium flags to easily identify the range.



#### SENSE PREMIUM ELECTRIC PYROLYTIC PIZZA SINGLE OVEN



#### Features



#### PERFECT PIZZA

Our Sense Premium collection features the new C2481SS pyrolytic pizza oven. Fresh pizza cooked to perfection in under three minutes!

#### PIZZA DOUGH

The C2481SS utilises a 40°C cooking setting which is ideal for proving fresh pizza dough.

#### SLOW COOKING

Use the base heat function at 90°C to slowly cook just about every tender cut of beef, lamb, pork and veal. Sear the meat then slowly roast the joint over a longer period of time - the benefit to this over conventional roasting is more succulent and full flavoured meat.

#### DEHYDRATE

Dehydration is a method of extracting moisture from food at low temperatures. Food can be preserved in this way so it's a great way to use a surplus of fresh produce or just to produce healthy snacks.

You can dehydrate fruit, herbs and vegetables and even meat such as jerky.

#### PRODUCT CODE





#### FINISH AVAILABLE

Fingerprint Resistant Stainless Steel

#### FUNCTIONS

- 18 Functions
- Light
- Base heat
- Convection heat
- Fan heat
- Turbo convection heat
- Turbo base heat
- Eco cooking
- Grill
- Turbo grill with base heat
- Turbo grill
- Base heat plus fan heat
- Classic Pizza [350°C]
- Defrost
- Dehydrate
- Warm
- Warm+
- Sabbath
- Pyrolytic clean

#### OVEN FEATURES

- Cooks two fresh pizzas in 3 minutes
- 65 Litre capacity
- Rotisserie cooking
- Temperature probe
- Demo display mode
- Boost [Fast preheat]
- Full touch control
- Programmable electronic timer
- Preset recipes
- Personalised recipesStainless steel, black-spot
- feature bar handle
- Quadruple glazed door with heat reflective glass
- Door safety lock during pyrolytic function
- Closed door grilling
- Twin speed tangential cooling fan
- Grey nickel free, easy clean enamel interior
- Twin halogen lights

#### ACCESSORIES

- 1 Safety-stop shelf
- 1 Grill pan with handle
- 1 Telescopic shelf
- 1 Rotisserie rack
- 1 Meat temperature probe

#### OPTIONAL ACCESSORIES

 Pizza stone, pizza shovel and wire tray [PIZZASET]

#### INSTALLATION

- Diagram [p.226]
- Rated load 3.45kW
- Fuse rating 20A

# COOKING

#### **SENSE PREMIUM ELECTRIC SINGLE OVENS**



C2151SS



C2150WH

#### PRODUCT CODE

**SD** Stainless Steel C2151SS

White Glass C2150WH sp

#### DIMENSIONS



e Energy Class A++ [C2151SS]

- Fingerprint Resistant Stainless Steel

- Fan heat
- Turbo convection heat
- Full grill
- Eco grill
- Turbo grill
- Turbo base heat
- Turbo base heat with grill
- max. 230°C]

#### **OVEN FEATURES**

- 65 Litre capacity
- Temperature probe
- Demo display mode
- Boost [Fast preheat]
- Clean
- Full touch control
- Programmable electronic timer
- Auto cooking with 36 preset recipes
- Personalised recipes
- Stainless steel, black-spot feature bar handle
- Triple glazed cool touch door with heat reflective glass
- Closed door grilling
- Twin speed tangential cooling fan
- Grey nickel free, easy clean enamel interior
- Twin halogen lights

#### ACCESSORIES

- 1 Safety-stop shelf
- 1 Grill pan with handle
- 1 Telescopic shelf
- 1 Enamelled baking tray
- 1 Meat temperature lights

#### **OPTIONAL EXTRAS**

- Oven steam set [STEAMSET]
- Chrome wire shelf [SHELF/SOVEN]
- Grey enamel baking tray [TRAY/SPOVEN] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.226]
- Rated load 3.5kW
- Fuse rating 20A

#### **CLEAN**

The nickel free. micro-porous enamel allows the oven to reach 250°C oxidising residue, making it easy to clean.



#### CONTROL

The intuitive control panel lets you swiftly access all functions, the electronic timer, minute minder and clock. You can also view the current cooking time and temperature.



#### AUTO SETTING

Choose from 36 preset recipes on the LCD panel. Includes food weight and temperature for optimum results. You can also create your own programmes.



## PERFORMANCE e Energy Class A [C2150WH] FINISH AVAILABLE

- White Glass

#### FUNCTIONS

14 Functions

- Light

- Base heat

- Convection heat

- Pizza [Fan heat with base heat
- Defrost
- Top heat
- Clean

Features

## LED TOUCH





## SENSE OVENS

With a choice of sultry black glass and an elegant stainless steel trim or a subtle contemporary gunmetal exterior, SENSE appliances have been designed to fit together effortlessly and will turn heads in any kitchen. At the same time, smart thinking and intelligent solutions deliver the ultimate in easy functionality.

Featuring innovative touch control technology, every SENSE oven delivers outstanding results, whatever the cooking task.



This function evenly distributes hot air around the oven cavity. It reaches the desired temperature rapidly & there is often no need to preheat, saving time & energy. Perfect for multi-level cooking without the transfer of flavours & you can achieve even results.

#### **TELESCOPIC RUNNERS**

As standard all SENSE ovens come with two full extension telescopic runners making it easier to check food as it cooks and reducing the risk of burning yourself on the oven interior.

#### ROTISSERIE

The C2901, C2105 and C2105GM single ovens both feature a rotisserie rack, perfect for cooking succulent roasts.

#### **PYROLYTIC OVENS**

The C2401 and C2401GM Pyrolytic technology works by heating the oven to 475°C, causing even hidden & baked-on grime to carbonise into a fine ash. It saves you vast amounts of elbow grease, & can in-fact improve oven efficiency over time.

#### SOFT CLOSE

The C2105 and C2105GM feature a clever soft-close hinge which activates when the door is inches away from the closed position preventing it from shutting abruptly.

#### PRECISION CONTROL AT YOUR FINGERTIPS

Most of the SENSE range features fully-programmable touch controls for precise and accurate cooking temperatures and times. Although, if you prefer the tactile feel of fixed dials, opt for the C2362 with solid metal controls.





**S** Look out for products marked with Sense flags to easily identify the range.

14



#### SENSE ELECTRIC 90CM SINGLE OVEN

Motion**Heat** 





#### **PRODUCT CODE S** C2901

DIMENSIONS

 $\leftrightarrow$  w:900mm

#### PERFORMANCE

e Energy Class A

#### FINISH AVAILABLE

Black Glass with Stainless Steel trim

#### FUNCTIONS

- 13 Functions - Light
- Base heat
- Conventional heat
- Fan heat
- Fan heat and grill
- Turbo conventional heat
- Full grill
- Eco grill
- Turbo eco grill
- Turbo grill
- Turbo base heat
- Defrost
- Defrost
- Boost [rapid preheat]

#### OVEN FEATURES

- 95 Litre XL capacity
- Full touch control
- Programmable electronic timer
- Square bar handle
- White LED display
- Self-cleaning catalytic liners [back and sides]
- Easy clean enamel interior
- Two internal lights
- Closed door grilling
- Rotisserie cooking
- Easy to remove chrome shelf racks
- Triple glazed door
- Full width inner door glass
- Tangential cooling fan

#### ACCESSORIES

- 2 Safety-stop shelves
- 1 Grill pan with handle
- 2 sets of full extension telescopic runners
- 1 Rotisserie rack

#### INSTALLATION

- Diagram [p.227]
- Rated load 3.65kW
- Fuse rating 16A



#### SENSE ELECTRIC PYROLYTIC SINGLE OVENS

Motion <b>Heat</b> +
104 M
C2401 Motion <b>Heat</b>
-
C2401GM

#### Features


#### PYROLYTIC CLEANING

The Pyrolytic technology works by heating the oven to 475°C, causing even hidden & baked-on grime to carbonise into a fine ash. It saves you vast amounts of elbow grease, & actually improves oven efficiency over time too.

PRODUCT CODE		
S	Black Glass C2401	
S Gunmetal C2401GM		
DIMENSIONS		
↔ w:600mm		
PERFORMANCE		

e Energy Class A

#### FINISH AVAILABLE



Gunmetal and Black Glass

#### FUNCTIONS

- 13 Functions
- Light
- Base heat
- Conventional heat
- Fan heat
- Fan heat with grill
- Turbo conventional heat
- Full grill
- Eco grill
- Turbo grill
- Turbo base heat
- Pyrolytic self cleaning
- Defrost
- Boost [rapid preheat]

#### **OVEN FEATURES**

- 67 Litre capacity
- Full touch control
- Programmable electronic timer
- Stainless steel square bar handle [C2401]
- Black square bar handle [C2401GM]
- White LED display
- Pyrolytic self-cleaning
- Easy clean enamel interior
- Two internal lights
- Closed door grilling
- Easy to remove chrome shelf racks
- Quadruple glazed door
- Full width inner door glass
- Tangential cooling fan

#### ACCESSORIES

- 2 Safety-stop shelves
- 1 Grill pan with handle
- 2 Sets of full extension telescopic runners

#### **OPTIONAL EXTRAS**

- 1 Wire shelf [SHELF4]
- 1 Baking tray [TRAY4]
- Pair of telescopic runners [CAPRACK8]
- 1 Steam set [STEAMSET] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.227]
- Rated load 3.57kW
- Fuse rating 20A



#### SENSE ELECTRIC SOFT CLOSE SINGLE OVENS

Motion**Heat**+





C2105

#### PRODUCT CODE

s Black Glass C2105

Gunmetal C2105GM s

#### DIMENSIONS

w:600mm  $\leftrightarrow$ 

PERFORMANCE

Energy Class A

#### FINISH AVAILABLE

Black Glass with Stainless Steel trim

Gunmetal and Black Glass

C2105GM

Motion**Heat**+

#### FUNCTIONS

- 13 Functions
- Light
- Base heat
- Conventional heat
- Fan heat
- Fan heat with grill
- Turbo conventional heat
- Full grill
- Eco grill
- Turbo Eco grill
- Turbo grill
- Turbo base heat
- Boost [rapid preheat]

#### **OVEN FEATURES**

- 67 Litre capacity
- Full touch control
- Programmable electronic timer
- Stainless steel square bar handle [C2105]
- Black square bar handle [C2105GM]
- White LED display
- Soft-close door
- Self-cleaning catalytic liners [back and sides]
- Easy clean enamel interior
- Two internal lights
- Closed door grilling
- Rotisserie cooking
- Easy to remove chrome
- shelf racks
- Triple glazed door
- Full width inner door glass
- Tangential cooling fan

#### Features

SOFT CLOSE

The intuitive soft close hinge prevents the door from slamming shut and brings it gently into position.

#### ACCESSORIES

- 2 Safety-stop shelves
- 1 Grill pan with handle
- 2 sets of full extension telescopic runners

#### OPTIONAL EXTRAS

- 1 Wire shelf [SHELF4]
- 1 Baking tray [TRAY3]
- Pair of telescopic runners [CAPRACK8]
- 1 Steam set [STEAMSET] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.227]
- Rated load 3.22kW
- Fuse rating 16A

- Defrost

#### SENSE ELECTRIC SINGLE OVEN



#### PRODUCT CODE

**S** C2101

DIMENSIONS w:600mm

#### PERFORMANCE e Energy Class A

#### FINISH AVAILABLE Black Glass with

Stainless Steel trim

#### FUNCTIONS

10 Functions

- Light
- Base heat
- Conventional heat
- Fan heat
- Turbo conventional heat
- Full grill
- Eco grill
- Turbo grill
- Defrost
- Boost [rapid preheat]

#### OVEN FEATURES

- 67 Litre capacity
- Full touch control
- Programmable electronic timer
- Square bar handle
- White LED display
- Self-cleaning catalytic liners [back and sides]

- Easy clean enamel interior
- Two internal lights
- Closed door grilling
- Easy to remove chrome shelf racks
- Double glazed door
- Full width inner door glassTangential cooling fan

#### ACCESSORIES

- 2 Safety-stop shelves
- 1 Grill pan with handle
- 2 sets of full extension telescopic runners

#### OPTIONAL EXTRAS

- 1 Wire shelf [SHELF4]
- 1 Baking tray [TRAY3]
- Pair of telescopic runners [CAPRACK8]
- 1 Steam set [STEAMSET] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.227]
- Rated load 3.22kW
- Fuse rating 16A

#### SENSE ELECTRIC SINGLE OVEN







 $\leftrightarrow$  w:600mm

PERFORMANCE

### e Energy Class A

#### FINISH AVAILABLE Black Glass with

Stainless Steel trim

#### FUNCTIONS

- 8 Functions
- Light
- Conventional heat
- Fan heat
- Full grill
- Eco grill
- Turbo grillTurbo base heat
- Defrost
- Denost

#### OVEN FEATURES

- 67 Litre capacity
- Touch control programmable electronic timer
- Square bar handle
- White LED display
- Metal dial controls
- Self-cleaning catalytic liners [back and sides]
- Easy to clean enamel interior
- Two internal lights

#### - Closed door grilling

- Easy to remove chrome shelf racks
- Double glazed door
- Full width inner door glass
- Tangential cooling fan

#### ACCESSORIES

- 2 Safety-stop shelves
- 1 Grill pan with handle
- 2 sets of full extension telescopic runners

#### OPTIONAL EXTRAS

- 1 Wire shelf [SHELF4]
- 1 Baking tray [TRAY3]
   Pair of telescopic runners [CAPRACK8]
- 1 Steam set [STEAMSET] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.227]
- Rated load 3.22kW
- Fuse rating 16A



COOKING

# SINGLE OVENS

## CLASSIC OVENS

Our high-performance Classic range comes with a host of standard and optional features, designed to make cooking even more satisfying.

These ovens are classically designed, as the name suggests, in stainless steel and sheer black glass. You'll find fully programmable electronic timers, cool-touch doors that are as good as their name suggests plus pyrolytic self-cleaning models. The push-pull knobs become flush with the fascia when not in use as well, for clean and smooth lines.

#### **COOL-TOUCH DOORS**

Double, triple and quadruple glazed doors that remain cool during cooking with heat-reflective glass and a tangential cooling fan.

#### LARGE VIEWING WINDOW WITH A LARGE CAPACITY TO MATCH

For more efficient cooking you can keep an eye on exactly what you're cooking without having to open the door and lose heat. Some single ovens also have a capacity as large as 69 litres, perfect for a hungriest of households

#### FULL WIDTH GLASS DOOR

Most Caple classic single ovens feature full width removable inner glass to make cleaning your oven less of a chore.

#### **PROGRAMMABLE ELECTRONIC TIMERS**

You can preset cooking start and stop times.


#### SOLID METAL DIALS

For ease of use and precise control at your fingertips.



C Look out for products marked with Classic flags to easily identify the range.



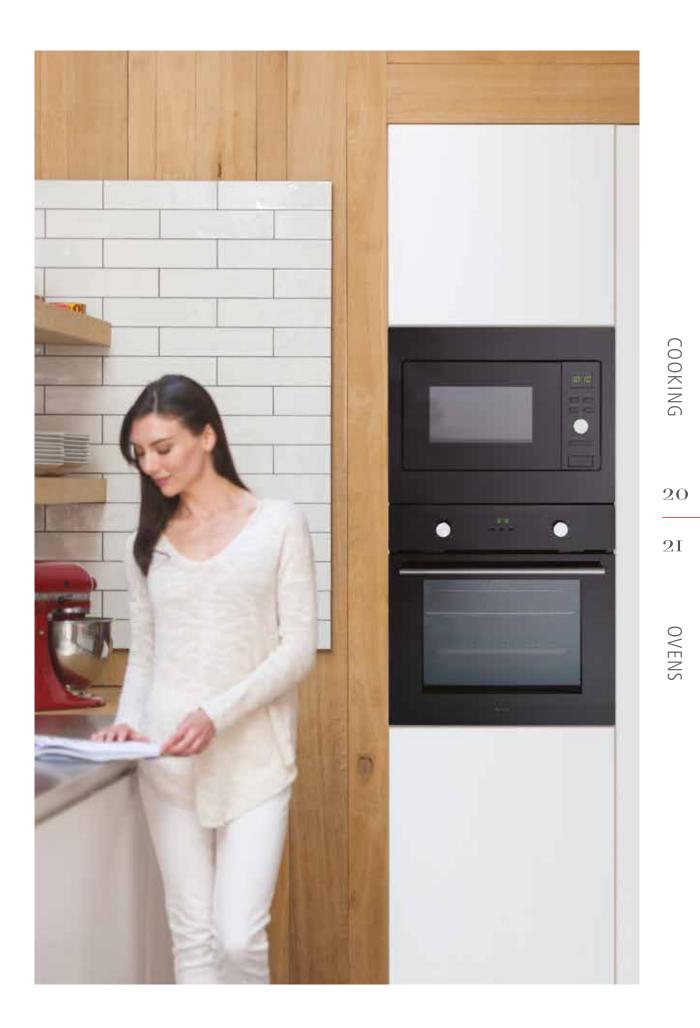



#### CLASSIC ELECTRIC PYROLYTIC SINGLE OVEN



## C C2238

DIMENSIONS



#### FINISH AVAILABLE

Stainless Steel with Black Glass

#### FUNCTIONS

8 Functions

- Conventional heat
- Fan heat
- Eco grill
- Full grill
- Turbo grill
- Turbo conventional heat
- Defrost
- Pyrolytic self-cleaning

#### OVEN FEATURES

- 68 Litre capacity
- Programmable electronic timer with green LED
- Electronic dial control
- Stainless steel, black-spot feature bar handle
- Quadruple glazed door with heat reflective glass
- Door safety lock during pyrolytic function
- Closed door grilling
- Tangential cooling fan
- Interior light
- Smooth and flat oven sides with chrome shelf racks

#### ACCESSORIES

- 1 Safety stop shelf
- 1 Grill pan with handle
- 1 Shelf for telescopic runners
- 2 Sets of telescopic runners

#### OPTIONAL EXTRAS

- 1 Safety-stop shelf [SHELF1]
- 1 Shelf for telescopic runners [SHELF2] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.228]
- Rated load 2.6kW
- Fuse rating 13A



#### **CLASSIC ELECTRIC SINGLE OVEN**



#### PRODUCT CODE **C** C2236





#### FINISH AVAILABLE

#### Stainless Steel with Black Glass

#### - Tangential cooling fan - Interior light

#### - Easy clean enamel

- Closed door grilling

- Smooth and flat oven sides with chrome shelf racks

- Stainless steel, black-spot

- Double glazed door with heat

- Full width removable inner

feature bar handle

reflective glass

door glass

#### ACCESSORIES

- 1 Safety-stop shelf - 1 Grill pan with handle

#### OPTIONAL EXTRAS

- 1 Safety-stop shelf [SHELF1]
- 1 Baking tray [TRAY1]
- 1 Set of telescopic runners supplied with shelf [CAPRACK6]
- Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.228]
- Rated load 3.1kW
- Fuse rating 16A

- COOKING
  - 2223

#### FUNCTIONS 9 Functions - Light

- Conventional heat

- Full grill
- Turbo grill
- Turbo conventional heat
- Fan heat
- Base plus fan heat
- Defrost

#### **OVEN FEATURES**

- 69 Litre capacity
- Programmable electronic timer with green LED
- Push in knobs

- Eco grill



C2233

#### PRODUCT CODE

C Stainless Steel C2233

C Black Glass C2233BK

#### DIMENSIONS

 $\leftrightarrow$  w:600mm

#### PERFORMANCE e Energy Class A

C Ellergy class A

#### FINISH AVAILABLE

Stainless Steel with Black Glass

Black Glass

#### **FUNCTIONS** 4 Functions

- 4 Function
- Fan heat
- Grill
- Turbo grill
- Defrost

#### OVEN FEATURES

- 69 Litre capacity
- Programmable electronic timer with green LED
- Stainless steel, black-spot feature bar handle
- Double glazed door with heat reflective glass
- Full width removable inner door glass
- Closed door grilling
- Tangential cooling fan
- Interior light
- Easy clean enamel
- Smooth and flat oven sides with chrome shelf racks

#### ACCESSORIES

- 1 Safety-stop shelf
- 1 Grill pan with handle

#### OPTIONAL EXTRAS

- 1 Safety-stop shelf [SHELF1]
- 1 Baking tray [TRAY1]
- 1 Set of telescopic runners supplied with shelf [CAPRACK6]
   Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.228]
- Rated load 2kW
- Fuse rating 10A



С2233ВК



LARGE VIEWING WINDOW WITH A LARGE CAPACITY TO MATCH

For more efficient cooking you can keep an eye on exactly what's in the oven without opening the door and losing heat.

## Features

#### **CLASSIC ELECTRIC SINGLE OVEN**

#### **CLASSIC GAS SINGLE OVEN**



#### PRODUCT CODE C C2230

DIMENSIONS

 $\leftrightarrow$ w:600mm

#### PERFORMANCE e Energy Class A

#### FINISH AVAILABLE

Stainless Steel with Black Glass

#### FUNCTIONS

4 Functions

- Fan heat
- Grill
- Turbo grill
- Defrost

#### **OVEN FEATURES**

- 69 Litre capacity
- Audible minute minder
- Stainless steel, black-spot feature bar handle
- Double glazed door with heat reflective glass
- Full width removable inner door glass
- Closed door grilling
- Tangential cooling fan
- Interior light
- Easy clean enamel
- Smooth and flat oven sides with chrome shelf racks

#### ACCESSORIES

- 1 Safety-stop shelf
- 1 Grill pan with handle and rack

#### OPTIONAL EXTRAS

- 1 Safety-stop shelf [SHELF1]
- supplied with shelf [CAPRACK6]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.228]
- Rated load 2kW
- Fuse rating 10A

#### PRODUCT CODE с C2512

#### DIMENSIONS

 $\leftrightarrow$ 

Stainless Steel with Black Glass

#### FUNCTIONS

- 3 Functions - Light
- Gas cooking
- Gas grill

#### OVEN FEATURES

- 70 Litre capacity
- Audible minute minder
- Stainless steel, black-spot feature bar handle
- Triple glazed door with heat reflective glass
- Flame safety device
- Closed door grilling
- Tangential cooling fan
- Interior light
- Easy clean enamel
- Smooth and flat oven sides with chrome shelf racks

#### ACCESSORIES

- 1 Safety-stop shelf
  - 1 Grill pan with handle

#### OPTIONAL EXTRAS

- 1 Safety-stop shelf
- [SHELF/C2512]
- Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.228]
- Rated load 0.05kW
- Fuse rating 3A

SINGLE OVENS



w:600mm

PERFORMANCE

e Energy Class A

#### FINISH AVAILABLE





24

COOKING

## - 1 Baking tray [TRAY1] - 1 Set of telescopic runners

## DOUBLE OVENS

10 10

0

0

When mass catering is on the cards, Caple comes up trumps. Our Sense and Classic ranges offer the capacity and the functions you need to satisfy the largest appetites.

**S C** Look out for products marked with Sense and Classic flags to easily identify the ranges.

#### SENSE ELECTRIC DOUBLE OVEN

Motion Heat





#### PRODUCT CODE **S** C3371

#### DIMENSIONS

 $\leftrightarrow$  w:595mm

#### PERFORMANCE

е Top Oven Bottom Oven

#### FINISH AVAILABLE

Black Glass with Stainless Steel trim

А

А

#### FUNCTIONS 4 Top Oven

- Conventional Heat

- Full Grill
- Base Heat
- Top Heat

#### 8 Bottom Oven

- Light
- Turbo Defrost
- Fan Heat
- Conventional Heat
- Turbo Base Heat
- Eco Grill
- Full Grill
- Turbo Grill

#### **OVEN FEATURES** Top Oven

- 40 Litre capacity [top oven]

#### **Bottom Oven**

- 61 Litre capacity [bottom oven]

#### GENERAL

- Black glass with stainless steel trim
- Square bar handle
- Metal dial controls
- Triple glazed doors with heat reflective glass
- Easy clean enamel interior
- Removable chrome shelf racks
- Tangential cooling fan
- White LED display
- Touch control programmable electronic timer
- Catalytic liners in both oven cavities

#### ACCESSORIES

- 1 Safety stop shelf in top oven
- 1 Safety stop shelf in bottom oven
- 1 Grill pan with handle in top oven
- 1 enamelled baking tray in bottom oven
- 2 Pairs of full extension telescopic runners

Please note this product has not been designed to suit a quad or linear installation. See pages 60-61 for recommended combinations.

#### **OPTIONAL EXTRAS**

- Spare shelf [SHELF3]
- Pair of telescopic runners [CAPRACK8]
- Oven steamer [STEAMSET]
- Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.228]
- Rated load 5.19kW
- Fuse rating 32A

 $\mathbf{26}$ 27DOUBLE OVENS

COOKING



#### PRODUCT CODE s



w:595mm

#### PERFORMANCE

е

Top Oven А Bottom Oven Α

#### FINISH AVAILABLE

#### FUNCTIONS

#### 4 Top Oven

- Conventional heat
- Full grill
- Base heat

#### - Top heat

- Light
- Turbo defrost
- Fan heat
- Turbo grill
- Conventional heat
- Turbo base heat
- Full grill

#### OVEN FEATURES

#### Top Oven

- 40 Litre capacity [top oven]

#### **Bottom Oven**

- 61 Litre capacity [bottom oven]

#### GENERAL

- Stainless steel, black-spot feature bar handles
- Triple glazed doors with heat reflective glass
- Easy clean enamel interior
- Removable chrome shelf racks
- Tangential cooling fan
- Green LED display
- Touch control programmable electronic timer

#### ACCESSORIES

- 1 Safety-stop shelf in top oven
- 1 Safety-stop shelf in bottom oven
- 1 Grill pan with handle in top oven
- 1 Enamelled baking tray in bottom oven

#### OPTIONAL EXTRAS

- Spare shelf [SHELF3]
- Oven steam set [STEAMSET]
- Pair of telescopic runners [CAPRACK7]
- Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.228]
- Rated load 5.19kW
- Fuse rating 32A

#### Features

#### **OVEN DOORS**

The triple glazed doors with heat reflective glass and full width sealed inner door glass makes these oven doors perfect for those looking to entertain regulary.



#### LED TOUCH CONTROL

The C3248 intuitive control lets you swiftly access all functions, the electronic cooking timer, end time, minute minder and clock.



#### **STEAMSET**

Time to ditch the frying pan and try a healthier cooking experience. [Compatible for use with C3245, C3248, C4245, C2101, C2105, C2105GM, C2362, C2401, C2401GM, C3371, C2150WH and C2151SS]



See page 31 for more details.



C3248

Stainless Steel with Black Glass

#### 8 Bottom Oven

- Eco grill



#### CLASSIC ELECTRIC DOUBLE OVEN

## PRODUCT CODE

DIMENSIONS ↔ w:595mm

#### PERFORMANCE

e Top Oven Bottom Oven А

A+

#### FINISH AVAILABLE

Stainless Steel with Black Glass

#### FUNCTIONS

- 4 Top Oven
- Conventional heat
- Full grill
- Base heat
- Top heat

#### 4 Bottom Oven

- Light
- Turbo defrost
- Fan heat
- Turbo grill

#### OVEN FEATURES

Top Oven

- 40 Litre capacity [top oven]

#### Bottom Oven

 61 Litre capacity [bottom oven]

- Stainless steel, black-spot feature bar handles
- Triple glazed doors with heat reflective glass
- Easy clean enamel interior
- Removable chrome shelf racks
- Tangential cooling fan
- Green LED display
- Programmable electronic timer

#### ACCESSORIES

- 1 Safety-stop shelf in top oven
- 1 Safety-stop shelf in bottom oven
- 1 Grill pan with handle in top oven
- 1 Enamelled baking tray in bottom oven

#### OPTIONAL EXTRAS

- Spare shelf [SHELF3]
- Oven steam set [STEAMSET]
- Pair of telescopic runners [CAPRACK7]
  - Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.228]
- Rated load 5.19kW
- Fuse rating 32A

28

29

## BUILT-UNDER OVEN

Neat, versatile and with a host of clever design features, our built-under ovens fit perfectly beneath the worktop. Grill in the top oven whilst fan cooking in the bottom - the ultimate tool in multi-tasking cooking.



#### CLASSIC ELECTRIC BUILT-UNDER OVEN



#### Accessories



#### STEAMSET

PRODUCT CODE	SUITABLE WITH
STEAMSET	- C3245
	- C3248
<ul> <li>FEATURES</li> <li>Food steaming set for use in ovens</li> <li>Can be used with the following cooking functions</li> <li>Base heat</li> </ul>	- C4245 - C2101 - C2105 - C2105GM - C2362 - C2401
<ul> <li>Turbo base heat</li> <li>INCLUDES</li> <li>1 Enamel tray with glass lid</li> <li>1 large perforated steam tray</li> <li>1 gastro tub</li> <li>1 perforated gastro tub</li> <li>1 chrome stand for gastro tubs</li> </ul>	<ul> <li>C2401GM</li> <li>Steamset must be placed on wire racks not the telescopic runners for the following</li> <li>C3371</li> <li>C2150WH</li> <li>C2151SS</li> </ul>

C C4245

## DIMENSIONS

#### PERFORMANCE

e Top Oven A Bottom Oven A+

#### FINISH AVAILABLE

Stainless Steel with Black Glass

#### FUNCTIONS

- 4 Top Oven - Conventional heat
- Full grill
- Base heat
- Top heat

#### 8 Bottom Oven

- Light
- Turbo defrost
- Fan heat
- Conventional heat
- Turbo base heat
- Base heat
- Top heat
- Turbo conventional heat

#### OVEN FEATURES

#### Top Oven

- 40 Litre capacity

#### Bottom Oven

- 42 Litre capacity

#### GENERAL

- Stainless steel and black glass
- Stainless steel, blackspot feature bar handles
- Full width sealed inner door glass
- Triple glazed doors with heat reflective glass
- Easy clean enamel interior
- Removable chrome shelf racks
- Tangential cooling fan
- Green LED display
- Touch control programmable electronic timer

#### ACCESSORIES

- 1 Safety-stop shelf in top oven
- 1 Safety-stop shelf in bottom oven
- 1 Grill pan with handle
- 1 Enamelled baking tray

#### OPTIONAL EXTRAS

- Spare shelf [SHELF3]
- Oven steam set [STEAMSET]
- Pair of telescopic runners [CAPRACK7]
  - Visit caple.co.uk for full range

#### INSTALLATION


- Diagram [p.228]
- Rated load 4.7kW
- Fuse rating 20A

BUILT-UNDER OVENS

COOKING

30

31

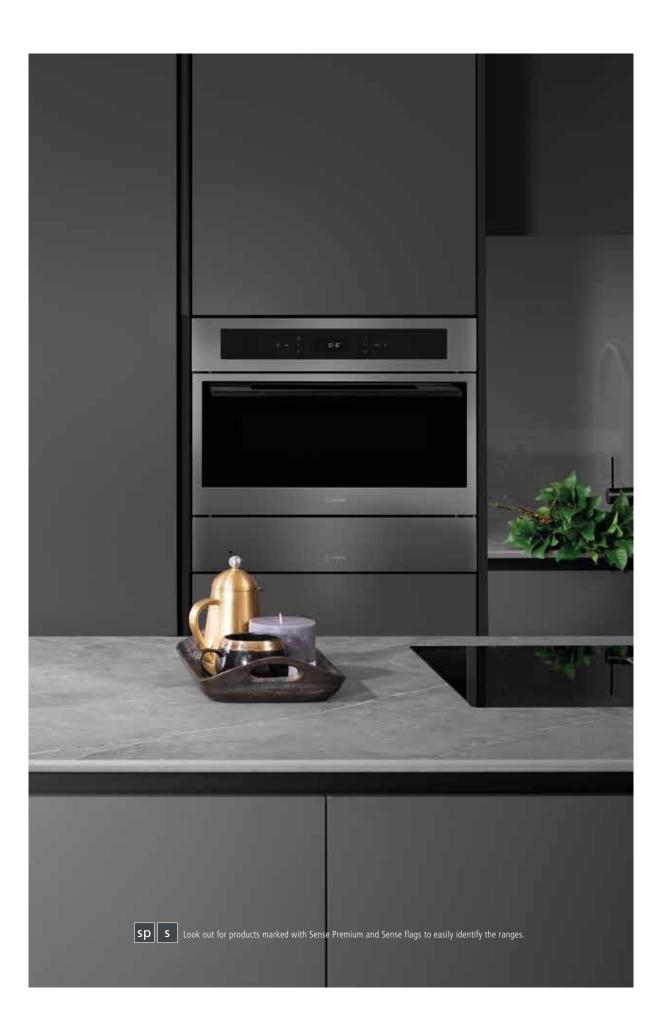

# Steam Ovens

Better taste and better for you.

Steam cooking is healthy, fuss-free and ensures fresh food retains its natural colours, flavours and shape. What's more, all the natural nutrients and goodness end up on the plate and not in the pan. Oh, and it is also one of the most energy-efficient ways to cook food.

## STEAM COMBINATION COOKING



Steam cooking is especially well suited to cooking foods like seafood, vegetables, pasta and rice - the sky's the limit.

Utilising the combined functions of a steam oven - fan, steam, and grill - you can be sure to beautifully capture flavour at every turn. From grilled fish such as tuna and salmon, to cooking succulent joints of meat with fan and steam injection to lock in moisture, combination cooking has never been so easy. Crab, lobster and other shellfish are done to perfection accompanied by steamed vegetables, from fresh new potatoes to crunchy carrots and broccoli. As for stodgy rice and soggy pasta, they will be a thing of the past.



COOKING

#### TOUCH CONTROLS AND LCD DISPLAY

The intuitive control panel lets you swiftly access all functions, the programmable timer, minute minder and clock. You can also view the current cooking time and the actual temperature in the cavity.

## STAINLESS STEEL INTERIOR

#### FINGERPRINT RESISTANT STAINLESS STEEL

#### **DELICIOUS DESSERTS**

Combining fan heat [dry heat] with steam [moisture] is the optimum environment for making the perfect light pastry, patisserie or cakes, as well as favourites such as rice pudding, or classic steamed pudding and custard

#### AUTO SETTING AND CUSTOMISED COOKING

With our Sense Premium models you can choose from 100 preset recipes displayed on the LCD panel. Includes food weight and temperature for optimum results. You can also create and save your own customised programmes.

#### ODOURLESS COOKING

There are no food odours with steam. This means you can prepare different parts of a meal together, without the flavours mingling. You can save energy too by cooking your meat and vegetables together.

#### LIGHT AND LARGE VIEWING WINDOW

From the display panel select the light function to check what is cooking without disturbing your food.

#### STEAM INJECTION

Creates a consistent temperature by heating up the water tank bringing the water to the correct temperature before injecting steam into the oven cavity.



#### GASTRO TUBS

If you like to steam a variety of food at the same time then our stainless steel Gastro tubs make it easy. [optional accessory]



#### SENSE PREMIUM BUILT-IN COMBINATION STEAM OVENS



*SO210SS* 



SO209WH

#### Features

#### STEAM RECOVERY SYSTEM

Water is collected during the cooling process and recycled to reduce the amount used.

#### DECALCIFICATION

Intuitive automatic descaling system to prevent limescale build up.

#### PRODUCT CODE

sp Stainless Steel SO210SS

sp White Glass SO209WH

#### DIMENSIONS

h:450mm

#### PERFORMANCE



#### FINISH AVAILABLE

Fingerprint Resistant Stainless Steel

White Glass

#### FUNCTIONS

- 11 Functions
- Light
- Fan heat - Turbo grill
- Grill and fan
- Grill
- Steam 100°C
- Steam 130°C
- Steam and fan heat
- Steam pulse
- Clean
- Auto

#### OVEN FEATURES

- 34 Litre capacity
- Touch control programmable electronic timer
- Electronic clock
- Stainless steel, black-spot feature bar handle
- 100 Preset cooking recipes
- Variable steam cooking temperature 40°C-100°C
- 2 Preset steam temperatures [cooking 100°C and reheating 130°]
- Steam cooking pause function
- Removable 1.54 Litre water tank
- Tangential cooling fan
- Interior light
- Stainless steel interior

#### ACCESSORIES

- 1 Perforated tray
- 1 Chrome grid
- 1 Stainless steel tray

#### OPTIONAL EXTRAS

- Stainless steel gastro-tub and lid [GTUB]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.229]
- Rated load 3.2kW
- Fuse rating 16A
- Fan cooking 1530W
- Steam cooking 1100W
- Grill 1500W





# SENSE BUILT-IN COMBINATION STEAM OVENS



SO110



S0110GM

#### Features

# EASY CLEAN STAINLESS STEEL INTERIOR

The beautiful stainless steel interior means the cavity can simply be wiped clean after every use.

#### PRODUCT CODE S Black Glass SO110

S Gunmetal SO110GM

DIMENSIONS



#### FINISH AVAILABLE

Black Glass with Stainless Steel trim Gunmetal and Black Glass

#### FUNCTIONS

10 Functions

- Light
- Defrost
- Fan heat
- Grill
- Turbo grill
- Steam
- Turbo grill and fan
- Fan heat with steam
- Descale
- Boost [rapid preheat]

#### OVEN FEATURES

- 36 Litre capacity
- Full Touch control
- Programmable
- electronic timer
- Electronic clock
- White display
- Stainless steel interior
- Chrome shelf racks with 4 positions
- Internal light
- Double glazed removeable door
- Defrost
- Descaling programme
- Steam cooking 40-100°C

#### ACCESSORIES

- 1 Shelf
- 1 Grill pan and handle
- 1 Steam tray

#### OPTIONAL EXTRAS

- 1 Descaler liquid [DESCALER]
- Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.229]
- Rated load 3.05kW
- Fuse rating 16A
- Fan cooking 1680W
- Steam cooking 1740W
- Grill 1450W

36 37 STEAM OVENS

COOKING

# COOKING THE WAY YOU WANT

Our oven range features the following functions, to make cooking as easy as pie.



#### PIZZA COOKING

Fan and bottom elements

- Fresh pizza cooked in under three minutes
- Cooking consistently through to the middle

PERFECT FOR

Pizza



#### CONVENTIONAL HEAT/ CONVENTIONAL ECO HEAT

- Top and bottom elements
- Cooking consistently through to the middle
- Best results, use one shelf only

PERFECT FOR Baking



FULL GRILL Full width grill - Even and consistent

grilling

PERFECT FOR

Large pieces of steak or fish

**TOP HEAT** Top element only

- Gentle heat to brown the top of a dish

**PERFECT FOR** Pasta or potato dishes



#### ECO GRILL

Half width grill

- Energy saving inner grill section only



Small portions of food, such as bacon or toast



BASE HEAT

Bottom element only

- Re-heating cooked food or for keeping food warm



#### TURBO CONVENTIONAL HEAT

Fan assisted top and bottom elements - Fast and even heat

- distribution
- Ideal for cooking more than one food type without transferring smells or tastes

#### PERFECT FOR

Light and delicate baking, such as pastry or bread



#### FAN HEAT/FAN HEAT PLUS

Fan element/fan, top and bottom elements

- Fast and highly efficient
- Fan Heat Plus uses the top and bottom elements as well, to deliver the right temperature even faster

#### PERFECT FOR

Juicy roasts, no pre-heat required – crisp the outside and keep the inside soft

**PERFECT FOR** All food types



#### **ROTISSERIE/CONVENTIONAL** HEAT/ROTISSERIE GRILL

- Turns meat automatically as it cooks, so that it bastes itself

PERFECT FOR

even browning

Succulent roasting and



#### TOP PLUS FAN HEAT

Fan assisted top element

- Heat from both rear and upper elements

#### PERFECT FOR

Finishing off a cooked dish, or melt a cheese topping without the worry of overcooking



#### TURBO BASE HEAT

Fan assisted bottom element

- Designed for delicate and slow cooking

PERFECT FOR Casseroles or stews



#### BASE PLUS FAN HEAT

Fan element and bottom element

- Circulated heat from two directions



#### **TURBO GRILL**/ **TURBO ECO GRILL**

Fan assisted full or half grill

- Quick browning



#### TURBO DEFROST

Fan only no elements

- No heat, fan only
- Uses fan power at room temperature to cut defrosting time in half



**GRILL PLUS BASE HEAT** Full grill and bottom element

PERFECT FOR

- Maintains consistent temp



#### Motion**Heat+** Fan heat

- Even heat distribution
- No flavour transfers across dishes

#### PERFECT FOR

Cooking meat whilst keeping all the juices

#### PERFECT FOR

Frozen desserts




#### PERFECT FOR Multi-level cooking

# 38 39

COOKING

COOKING THE WAY YOU WANT

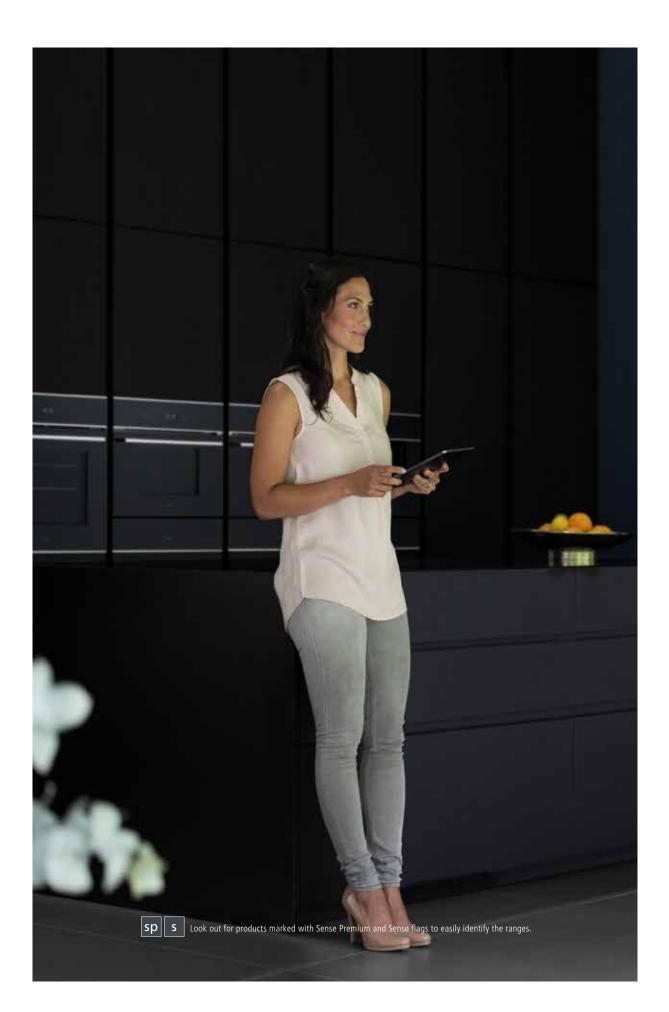

# Microwaves

Caple microwaves are packed with clever technology, and perfect for making quick and easy snacks as well as serious cooking. A must-have for a busy lifestyle. COOKING



#### DELICIOUS MEALS IN MINUTES

Minimalist design to complement any kitchen, yet big on handy features.

Depending on your cooking requirements, you can choose a microwave for its traditional uses such as warming up leftovers or defrosting food quickly. Alternatively, why not opt for a combination microwave? As well as cooking meals quickly, you can also use it as a normal oven and grill providing extra space when you are entertaining.

#### TURNTABLE FREE DESIGN

Exclusive to our SENSE range, these exquisitely designed microwaves look the part. All models have 40L capacity, removable dishwasher friendly glass base and a turntable free design. This means you can fit large dishes into the cavity.



#### SENSE PREMIUM MICROWAVES

Good looks and advanced functionality makes this the perfect choice for a busy lifestyle, instinctive and powerful, it puts effortless cooking at your fingertips.



#### SENSE MICROWAVES

If you are in need of a traditional microwave to heat up your leftovers, the CM108 is the perfect choice. Or, if you're feeling more adventurous in the kitchen, try the CM110 combination microwave with a range of cooking options to enjoy.

The CM110 is available in Black or Gunmetal.



#### **CLASSIC MICROWAVES**

Our CM126 model combines a microwave, grill and powerful 2500W convection oven for incredible all-round functionality.



#### SENSE PREMIUM BUILT-IN COMBINATION MICROWAVE



#### PRODUCT CODE

sp CM210SS

#### DIMENSIONS h:450mm

#### FINISH AVAILABLE

Fingerprint Resistant Stainless Steel

#### FUNCTIONS

- **11** Functions
- Light
- Fan heat
- Grill and fan heat
- Full grill
- Turbo grill
- Timed defrost
- Defrost by weight
- Microwave
- Microwave and grill
- Microwave and fan
- Auto settings

#### FEATURES

- 34 Litre capacity
- Touch control programmable electronic timer
- Electronic clock
- 6 Microwave power levels
- Thermostatic grill
- 60 Preset cooking recipes that can be customized
- Keep warm function [if door remains closed after cooking]
- Express microwave programme
- Audible timer
- Interior halogen light

#### DESIGN

- Stainless steel, black-spot feature bar handle
- Stainless steel interior

#### ACCESSORIES

- 320mm diameter glass turntable
- 1 Round chrome shelf
- 1 Chrome grid
- 1 Stainless steel tray

#### INSTALLATION

- Diagram [p.229]
- Rated load 3.2kW
- Fuse rating 16A

#### COOKING OUTPUT

- Fan cooking 1500W
- Microwave cooking 900W
- Grill 1500W

#### Features

#### GREAT RESULTS

Achieve great results by combining this model with a fan or grill, using the fan or grill together, or just regular convection cooking. Everything you need, in a microwave.



#### CONVECTION COOKING

Bringing together a ring element and a fan to provide evenly cooked and browned results. It's quicker than conventional cooking and can be combined with the microwave to reduce cooking time even more, the grill for perfect browning – or both the microwave and grill together.

#### TURBO GRILL

The fan cooking system and grill deliver perfect results in all kinds of meals. It even locks in meat juices for better flavour.

#### **SENSE BUILT-IN COMBINATION MICROWAVES**



CM110



CM110GM

#### PRODUCT CODE

S Black Glass CM110 Gunmetal CM110GM S

DIMENSIONS  $|\uparrow\rangle$ h:450mm

#### FINISH AVAILABLE

Black Glass with Stainless Steel trim Gunmetal and Black Glass

#### FUNCTIONS

10 Functions

- Light

- Microwave [10 power levels]
- Auto Defrost
- Turbo Grill
- Fan heat
- Turbo conventional
- Microwave and fan heat
- Microwave and turbo grill
- Microwave and conventional heat
- Auto cooking

#### FEATURES

- 40 Litre capacity
- Full touch control
- Programmable electronic timer
- Stainless steel square bar handle [CM110]
- Black square bar handle [CM110<sup>'</sup>GM]
- Electronic clock
- White display
- Stainless steel interior
- Turntable free design
- Chrome shelf rack with 3 positions
- Internal light
- Double glazed removable door
- [Microwave] 10 power levels

#### - Child safety lock

- 8 Auto cooking programmes
- Auto-defrost

#### AUTO COOKING PROGRAMMES

- Milk
- Soup
- Vegetables
- Noodles
- Bread
- Fish
- Meat
- Chicken

- Stainless steel interior
- White LED display

- 1 Baking tray
- 1 Glass base plate

#### INSTALLATION

- Diagram [p.229]
- Rated load 2.55kW
- Fuse rating 13A

#### COOKING OUTPUT

- Microwave cooking 1000W
- Grill 1000W

MICROWAVES

COOKING

44

45

#### DESIGN

- Square bar handle

#### ACCESSORIES

#### - 1 Shelf



#### SENSE BUILT-IN MICROWAVE



#### PRODUCT CODE **S** CM108

DIMENSIONS h:450mm

#### FINISH AVAILABLE Black Glass with

#### FUNCTIONS

4 Functions

- Light

- Microwave [10 power levels]

- Auto defrost
- Auto cooking

#### FEATURES

- 40 Litre capacity
- Full Touch control
- Programmable electronic timer
- Electronic clock
- White display
- Stainless steel interior
- Turntable free design
- Internal light
- Double glazed removable door
- 10 power levels
- Child safety lock
- Auto-defrost
- 8 Auto cooking programmes

#### AUTO COOKING PROGRAMMES

- Milk
- Soup
- Vegetables
- Noodles
- Fish

#### DESIGN

- Square bar handle

#### ACCESSORIES

- 1 Glass base plate

#### INSTALLATION

- Diagram [p.229]
- Rated load 1.5kW
- Fuse rating 10A

#### COOKING OUTPUT

- Bread
- Meat
- Chicken

- Stainless steel interior
- White LED display

- Microwave cooking 1000W











#### CLASSIC BUILT-IN COMBINATION MICROWAVE





#### PRODUCT CODE **C** CM140

DIMENSIONS h:450mm

#### FINISH AVAILABLE Black Glass

#### FUNCTIONS

11 Functions

- Fan heat
- Grill
- Turbo grill
- Defrost by weight
- Fan heat with base heat
- Microwave
- Microwave and grill
- Microwave and turbo grill
- Microwave and fan heat
- Microwave and fan heat with base heat
- Auto settings

#### FEATURES

- 36 Litre capacity
- Auto cook menu
- Touch control
- 5 microwave power levels
- Combination microwave, convection and grill cooking
- Fast preheat [7mins to 230°C]
- Auto defrost

#### - Speed cooking

- Memory function
- Child safety lock
- Minute timer [up to 5 hours]
- End of cooking signal
- Easy clean enamel cavity
- LED display
- Tangential cooling fan

#### DESIGN

- Stainless steel, black-spot feature bar handle
- Blue enamel interior

#### ACCESSORIES

- 315mm diameter turntable
- Small grill rack
- Tall grill rack

#### OPTIONAL EXTRAS

- 1 Glass tray and chrome wire rack [TRAY2]
  - Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.229]
- Rated load 3.3kW
- Fuse rating 15A

#### COOKING OUTPUT

- Convection cooking 1750W
- Microwave cooking 900W
- Grill 1200W

# 46 47



#### PRODUCT CODE

**C** CM130

## h:388mm

[inc. built-in frame]

#### FINISH AVAILABLE

Stainless Steel

#### FEATURES

- 25 Litre capacity
- Microwave and grill combined cooking
- Auto cook menu
- Defrost by time or weight
- Speed cooking
- Multi stage cooking
- Child safety lock
- Minute timer [up to 95mins]

#### - End of cooking signal

- Green LED display
- Push door
- Trim kit and unit installed in packaging

#### DESIGN

- Stainless steel front and cavity
- Mark resistant finish

#### INSTALLATION

- Diagram [p.229]
- Rated load 2.15kW
- Fuse rating 13A

#### COOKING OUTPUT

- Microwave cooking 900W
- Grill 1000W

# CLASSIC BUILT-IN COMBINATION MICROWAVE



PRODUCT CODE

#### DIMENSIONS

h:460mm [inc. built-in frame]

FINISH AVAILABLE Stainless Steel

#### FEATURES

- 25 Litre capacity
- Auto cook menu
- Auto defrost
- Speed cooking
- Multi-stage cooking
- Child safety lock
- Minute timer [up to 95mins]
- End of cooking signal
- Push door
- Green LED display

#### DESIGN

- Stainless steel front and cavity
- Mark resistant finish

#### INSTALLATION

- Diagram [p.230]
- Rated load 2.5kW
- Fuse rating 13A

#### COOKING OUTPUT

- Microwave cooking 900W
- Grill 1000W
- Convection cooking 2500W

#### **CLASSIC BUILT-IN** MICROWAVE AND GRILL



CM123



СМ123ВК

#### **CLASSIC BUILT-IN WALL UNIT** MICROWAVE AND GRILL



#### PRODUCT CODE

C CM123 C CM123BK



#### FINISH AVAILABLE

Black Glass

Fingerprint Resistant Stainless Steel

#### DESIGN

- Stainless steel front and cavity
- Mark resistant finish

#### INSTALLATION

- Diagram [p.230]
- Rated load 1.45kW
- Fuse rating 13A

#### COOKING OUTPUT

- Microwave cooking 900W

- Grill 1000W

#### FEATURES

- 25 Litre capacity
- Auto cook menu
- Auto defrost
- Speed cooking
- Multi-stage cooking
- Child safety lock
- Minute timer [up to 95mins]
- End of cooking signal
- Push door
- Green LED display

48

49

COOKING

#### PRODUCT CODE **C** CM120

#### DIMENSIONS

h:382mm [inc. built-in frame]

#### FINISH AVAILABLE

Stainless Steel

#### **FEATURES**

- For building into a 300mm deep wall cabinet
- 17 Litre capacity
- Auto cook menu
- Auto defrost
- Speed cooking
- Multi-stage cooking

- Minute timer [up to 95mins]
- End of cooking signal
- Green LED display

#### DESIGN

- Stainless steel front and cavity
- Mark resistant finish

#### INSTALLATION

- Rated load 1.05kW
- Fuse rating 13A

#### COOKING OUTPUT

- Microwave power 700W
- Grill power 1000W

MICROWAVES

- Child safety lock

- Push door





# Coffee Machines

Combining the subtle art of the barista with the very latest in coffee machine technology. Caple gives you perfect coffee at the touch of a button.



#### THE SECRET TO GREAT COFFEE

Fantastic coffee depends on many factors. The beans you use, the way they're ground, even what temperature it is and how it is frothed. Plus, of course, finding a coffee machine that's really up to the job.



#### MAKING A PERFECT ESPRESSO

What you're aiming for is a pour that starts out darkly coloured then turns into shades of caramel moving slowly, like honey. Caple coffee machines makes it effortless every time.



#### **BARISTA STYLE COFFEE**

If you like milk with your coffee, you'll also need to polish up your frothing skills. The texture depends on how the air enters the milk as you steam. You need a smooth, consistent texture where the foam and milk intertwine. Look out for blobs of froth on top, and don't boil it. If the jug's base is too hot to touch, it means the milk's probably reached the right temperature.

For hassle free barista style lattes, cappucinos and flat whites at the touch of a button opt for the CM465.



#### **CHOOSING THE RIGHT COFFEE**

Coffee beans vary in their size, shape, colour and flavour depending on the region and conditions in which they were grown. The range of unique flavours and aromas between regions is as expansive as the variety of wine available from different vineyards. It is worth experimenting with different varietals to discover a bean perfect for your palate.

Team that with one of our outstanding coffee machines and you'll have the perfect coffee every time.



#### SENSE PREMIUM BUILT-IN **COFFEE MACHINES**



#### PRODUCT CODE sp White Glass

CM471WH

#### DIMENSIONS h:450mm

#### FINISH AVAILABLE

White Glass

#### **FEATURES**

- Fully automatic
- Touch control
- Settings can be adjusted for making various hot drinks such as short espresso, long espresso, normal coffee, long coffee, warm milk, warm water or cappuccino
- Coffee bean grinder
- Coffee grinder adjustment to modify how fine the coffee beans are ground
- Coffee grind time adjustment to modify how long the coffee beans are ground for
- Drink volume adjustment to modify the amount of coffee dispensed
- Steam nozzle to heat and froth milk
- Coffee strength control
- 2.5 Litre water tank
- Drip tray

#### - Used coffee ground bin

- Stand-by energy saving
- Cleaning warning
- Water filter
- White LED lighting

#### OPTIONAL EXTRAS

- 6 replacement water filters [PURITI6] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.230]
- Rated load 2kW
- Fuse rating 13A

#### Features

#### LED TOUCH CONTROL

Sleek touch controls allow you to choose the type of coffee instantly - one or two cups, espresso or white, decaffeinated, long coffee, hot water or steam.





#### **DISPENSING NOZZLES**

Filter options are provided to match the amount of coffee in use. The amount of water dispensed can be adjusted too, depending on the size of cup.





#### SENSE BUILT-IN COFFEE MACHINE



#### Features

#### CAPPUCCINO, JUST THE WAY YOU LIKE IT

Using the milk dispenser you can make your perfect flat white, latte or cappuccino.

For ease of use the coffee machine is set to deliver a standard cappuccino, although if you prefer more or less coffee you can adjust either to suit your preference.

#### COFFEE FOR TWO

Save time by making two cups of coffee simultaneously.

#### COMPLETE CONTROL

Produce your ideal beverage with ease by adjusting the settings to your preference. You can control everything from the size and strength to the fineness of your coffee grind. Perfection every time.

## PRODUCT CODESCM465

DIMENSIONS

#### FINISH AVAILABLE

Black Glass with Stainless Steel Trim

#### FEATURES

- Fully automatic

- Full touch control with white LCD display
- Settings can be adjusted for making various hot drinks such as short espresso, long espresso, normal coffee, long coffee, warm milk, warm water or cappuccino [Milk/coffee mix can be customised]
- Coffee bean grinder
- Coffee grinder adjustment to modify how fine the coffee beans are ground [13 settings]
- Uses fresh coffee beans or pre-ground coffee
- 5 Drink volume adjustments to modify the amount of coffee dispensed [Espresso, small, medium, large, mug]. Each size can be adjusted to fit your favourite cup.
- 30 Auto programmes
- Programme machine to switch-on and warm up at set time

#### - Makes 2 cups at a time

- Milk jug
- Steam nozzle to heat and froth milk
- Hot water function
- 3 temperature settings
- 5 Coffee strength settings [Extra-strong, strong, medium, light, extra-light]
- 1.8 Litre water tank
- 200g coffee bean capacity
- 15 bar steam pressure
- Drip tray, to collect spillages
- Used coffee ground bin
- Stand-by energy saving
- Water hardness setting
- Cleaning warning
- Descale programme

#### ACCESSORIES

- Coffee Spoon
- Descaling agent bottle
- Milk jug
- Hot water nozzle

#### OPTIONAL EXTRAS

- 1 Liquid descaler [DESCALER] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.230]
- Rated load 1.35kW
- Fuse rating 10A



# Warming & Storage Drawers

There's nothing more disappointing than a hot meal served on a cool plate. Caple's warming drawers keep tableware at just the right temperature for when the food is ready to be served.

Why not add a storage drawer too? It's a convenient and stylish way to organise your coffee and wine accessories.

#### SENSE WARMING DRAWER





WMD1355WH

#### PRODUCT CODE sp Stainless Steel

WMD1356

sp White Glass WMD1355WH

#### DIMENSIONS

h:131mm

#### FINISH AVAILABLE

**Fingerprint Resistant** Stainless Steel

White Glass

#### FEATURES - Fan heating

- Push/pull opening
- Dishes for a meal for 6 people take approx 2-4mins to heat up to 70°C
- Extremely rigid to support the weight of an appliance on top
- Maximum capacity 10kg or 6 dinner plates, 6 soup plates, 3 serving bowls and 2 platters
- 400W Heating element with tangential fan
- 30-70°C adjustable thermostat
- Smooth slide soft-close drawer runners and attractive black interior glass base

#### INSTALLATION

- Diagram [p.231]
- Rated load 0.4kW
- Fuse rating 3A

#### Features

#### OUALITY **INTERIOR**

Precision engineered sliding runners give a high-quality feel. All models feature either a protective anti-slip mat or stylish black base.







FEATURES

- Fan heating

up to 75°C

- Push/pull opening

- Dishes for a meal for 6 people

take approx 30mins to heat

- Extremely rigid to support the

- Maximum capacity 25kg

- 400W heating element with

- 30-75°C adjustable thermostat

weight of an appliance on top

WD140GM





#### FINISH AVAILABLE



drawer runners - Non-slip base cover

- Smooth slide soft-close

- On/off light

tangential fan

#### INSTALLATION

- Diagram [p.231]
- Rated load 0.46kW
- Fuse rating 3A



# Gunmetal WD140GM

#### DIMENSIONS

Black Glass with Stainless

Gunmetal and Black Glass

# C

#### **CLASSIC STORAGE DRAWER**

#### WINE ACCESSORY INSERT





#### PRODUCT CODE с SD1356

#### DIMENSIONS h:131mm

#### FINISH AVAILABLE

Fingerprint Resistant Stainless Steel

#### FEATURES

- Push/pull opening
- Extremely rigid to support the weight of an appliance on top
- Maximum capacity 10kg
- Smooth slide soft-close drawer runners
- Attractive black interior glass base
- Storage drawer will take SDWINE and SDCOFFEE [see right] wooden inserts

#### INSTALLATION

- Diagram [p.231]

#### PRODUCT CODE SDWINE



FINISH AVAILABLE

Solid Beech Wood

#### beech wood

FEATURES - Produced from solid

- Sections for various wine accessories including foil cutter, cork screw and thermometer
- 8 Separate storage sections
- Wine accessories not included
- Can only be used with SD1356



# RECOMMENDED COMBINATIONS

All our compact appliances are designed to work with a matching oven. So when thinking about your kitchen design it is important to find the right combination for your needs.



C2151SS Oven



CM210SS Microwave WMD1356 Warming Drawer



SO210SS Steam Oven WMD1356 Warming Drawer



C2481SS Oven

#### SENSE PREMIUM - QUAD



We recommend that when installing a stack or quad of products, a pair of our installation brackets [OVEN/BRACKETS2] are purchased to support the upper product ensuring a seamless fit.

CM471WH Coffee Machine C2150WH Oven WMD1355WH Warming Drawer

SO209WH Steam Oven C2150WH Oven WMD1355WH Warming Drawer

#### SENSE PREMIUM - LINEAR

#### SENSE

All our SENSE compact appliances and ovens have been designed to fit perfectly together. So when planning your dream kitchen it is important to find the right combination and use the space effectively.



C2401GM Electric single Pyrolytic oven



CM110GM Combination Microwave WD140GM Warming Drawer



SO110GM Steam oven WD140GM Warming Drawer



C2105GM Electric single oven





SO110 Steam oven

C2401 Electric single Pyrolytic oven WD140BK Warming Drawer





CM110 Combination Microwave C2105 Electric single oven WD140BK Warming Drawer





CM108 Microwave C2101 Electric single oven WD140BK Warming Drawer



CM465 Coffee Machine

C2362 Electric single oven

WD140BK Warming Drawer



COOKING




CM123 Microwave C2233 Oven



CM126 Microwave C2236 Oven

# 

CM123BK Microwave C2233BK Oven

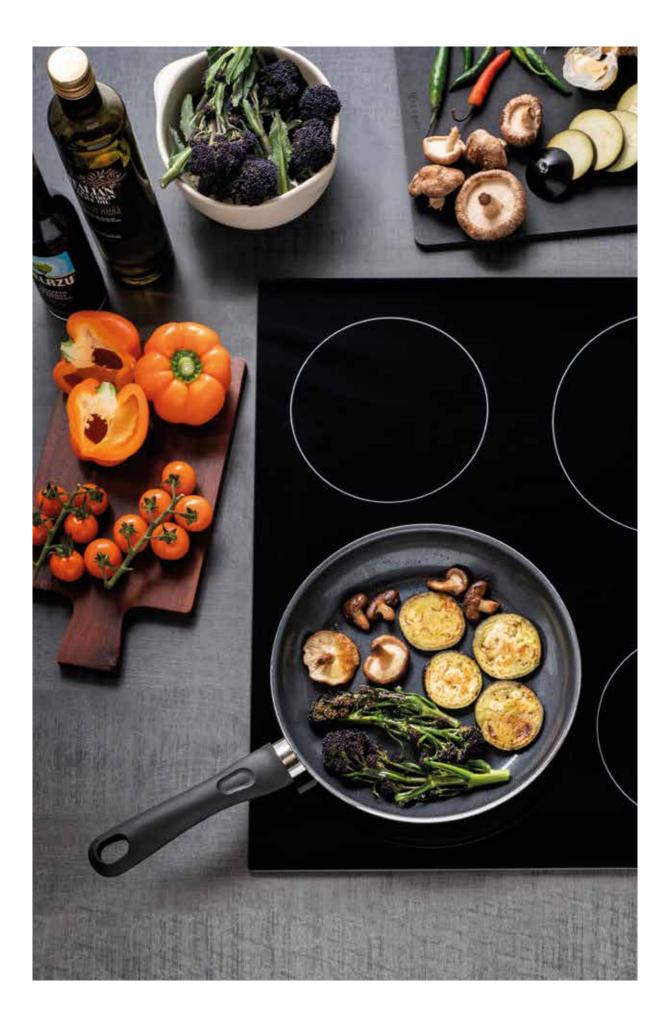

# Hobs

Whether you choose gas, electric or induction, Caple's advanced technology and unswerving eye for detail means real control and stylish good looks every time.  $\begin{array}{c} \text{COOKING} \\ \hline 63 \\ \hline 63 \\ \end{array} \\ \begin{array}{c} \text{HOBS} \end{array}$ 



## Choosing the right hob

#### MIX AND MATCH MODULAR HOBS

Any number of modules can be mixed together in any sequence. In fact, the options are almost endless [find out more on p.87].



#### INDUCTION

Uses leading-edge technology by creating a magnetic field between the hob and pan. They're quick, easy to use and energy efficient.



#### GAS

Most professional kitchens opt for gas. Heat is instant and control is intuitive. You can choose either stainless steel or coloured enamel finishes.



Developed with cutting-edge design and outstanding efficiency in mind, DirectHeat+ sends the heat upwards directly towards the base of the pan via 45° inclined flame. More heat hits the base of the pan rather than escaping around the sides, therefore decreasing boiling time and bringing food to temperature more rapidly.



#### ELECTRIC

The smooth glass finish of a ceramic hob makes cleaning easier. They're sleek and look very contemporary, making them ideal for more modern kitchens.





## Induction Hobs

They're hygienic, more energy-efficient, safer and easier to use.

They work by creating a magnetic field between the hob and the pan. Heat is instant, and it's easy to control. Once you remove the pan, they cool down very quickly, which is handy if kids are about. They're more energy-efficient because they only heat the pan area itself, rather than all around it. In fact, they use around 25% less energy than some hobs.

#### MEMORY RECALL

After switching the hob off, it is possible to recall the last used settings with a couple of simple button presses.

#### AUTOMATIC PAN DETECTION

This feature detects when a suitable pan has been placed on a cooking zone, helping to eliminate the possibility of the hob being activated by a non-suitable object.

#### **BOOSTER AND BOOSTER+**

Saves time by increasing power for a quicker boiling time.

Booster+ provides even further power and performance.

#### **BRIDGE FUNCTION**

Our C970i and C856i are multi zone induction hobs. They provide complete flexibility allowing either the use of individual zones or the ability to combine them to create larger cooking areas.

If you cook regularly using oversized pans such as fish kettles, these hobs will handle them with ease.



#### ANTI-OVERFLOW, BOIL CONTROL AND ANTI-OVERHEAT

Some models include intuitive features to make cooking that little bit easier. Anti-overflow automatically cuts off the cooking zone if liquid boils over onto the control panel. Luckily boil control maintains a temperature of 94°C, just below boiling, whilst anti-overheat prevents the hob from overheating and damaging the elements, preserving the lifetime of your appliance.



#### PAUSE FUNCTION

This allows you to temporarily stop the entire hobs cooking activity and then restart it at the same settings.



#### **PRODUCT CODE** C970i

DIMENSIONS

#### FINISH AVAILABLE

Black Glass

#### FEATURES

- Frameless with bevelled edge
- Touch control with white LCD screen
- 14 Level powder display for each zone [0-9, Bake 42°C, keep warm 70°C, boil control 93°C, Booster and booster+]
- Up to 8 cooking levels can be set at any one time

#### PRODUCT CODE

IGRIDDLE2

DIMENSIONS

↔ 460 x 260 x 33mm

#### WEIGHT 6.5kg

- Booster function and Booster+ on all 8 zones [p.66]
- Auto-bridge function to link zones for larger pans
- Chef Mode
- Heating area and delivered power automatically adapts to the pan
- 8 Programmable timers to set cooking duration and finishing time on each individual zone [up to 99 mins]
- Minute minder
- User programmable power levels
- Quick start short-cuts
- Adjustable brightness level for LCD screen
- Adjustable volume
- Memory recall function
- Pause function

#### FEATURES

- Cast iron with food grade enamel coating
- Extra-large 840cm<sup>2</sup> cooking area [Plancha 490cm<sup>2</sup> and griddle 350cm<sup>2</sup>]
- Dishwasher safe
- Ergonomic handles
- Flat base for use on Caple induction hobs
- Adapted for use with C901i, C970i, C876i, C856i, DD935BK, DD940BK, also suitable for use on gas hobs

- Child safety lock
- Residual heat indicators
- Automatic safety shut-off
- Automatic pan detection
- Anti-overheat
- Anti-over flow
- Demo mode

#### COOKING OUTPUT


8 Induction Zones

- 220 x [180/38mm] - 2.1kW

#### **OPTIONAL EXTRAS**

- Cast iron induction griddle [IGRIDDLE2]

Visit caple.co.uk for full range



All 8 cooking zones shown



Chef Mode

#### INSTALLATION

- Diagram [p.231]
- Rated load 11.1kW
- Fuse rating 40A

#### Features

#### CHEF MODE

The chef mode creates three large zones, allowing you to cook with multiple pans at various temperatures all at the same time. For example, you can fry with intense heat then slide the pan over to a low temperature zone to keep it warm whilst you concentrate on other dishes.



#### **MULTI-ZONE INDUCTION HOB**

#### **RIBBON INDUCTION HOB**



#### PRODUCT CODE

C950i

#### DIMENSIONS

Varies according to formation

#### FINISH AVAILABLE

Black Glass

#### FEATURES

- Frameless
- Slider touch control with direct access
- Can be flush mounted or inset [ALL 4 ZONES MUST BE INSTALLED]
- 11 Level digital power display for each zone [0-9 plus keep warm and Booster]
- Booster function on all zones [p.66]
- Programmable timer to set cooking duration and finishing time on each individual zone [up to 99 mins]
- Keep warm function
- Memory recall function

See pages 66-67 for Induction Feature explanations.

- Pause function

#### - Child safety lock

- Residual heat indicators
- Automatic safety shut-off
- Automatic pan detection
- Anti-overheat
- Anti-overflow

## 4 Induction Zones

- 4 Induction Zones - 2 Dia. 300mm – 3kW
- 2 Dia. 270mm 1.4kW
- 2 010. 27 011111 1.4

#### INSTALLATION

- Diagram [p.232]
- Rated load 7.4kW
- Fuse rating 25A

(##) # # # \_\_\_\_\_\_\_

#### PRODUCT CODE

C876i

#### DIMENSIONS

 $\leftrightarrow$  w:900mm

#### FINISH AVAILABLE Black Glass

#### FEATURES

#### - Frameless

- Central slider touch control with direct access
- White display
- Can be flush mounted or inset
- 11 Level digital power display for each zone [0-9, keep warm 70°C, and Booster]
- Booster function on 2 zones
- Bridge function to create 1 large zone [from 2 zones]
- Programmable timer to set cooking duration and finishing time on each individual zone [up to 99 mins]
- Memory recall function
- Pause function
- Child safety lock
- Residual heat indicators

#### - Automatic safety shut-off

- Automatic pan detection
- Anti-overheat
- Anti-overflow

#### COOKING OUTPUT

- 4 Induction Zones - 220mm - 3.0kW
- 190mm 2.0kW
- 190mm 1.4kW
- 175mm 1.4kW

#### OPTIONAL EXTRAS

- Cast iron induction griddle [IGRIDDLE2]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.231]
- Rated load 7.1kW
- Fuse rating 25A



INDUCTION HOBS

COOKING

#### INDUCTION HOB



#### Features

#### PAN MOVE FUNCTION

Allows you to move the pan from one zone to another and it will automatically pick up the seleted settings from the zone the pan has been moved from [Power level and timer].

#### CHEF MODE

The chef mode creates three large zones, allowing you to cook with multiple pans at various temperatures all at the same time. For example, you can fry with intense heat then slide the pan over to a low temperature zone to keep it warm whilst you concentrate on other dishes.

#### PRODUCT CODE

C901i



#### FINISH AVAILABLE Black Glass

- FEATURES
- Invisi touch control with direct access
- White display
- Can be flush mounted or inset
- 11 Level digital power display for each zone [0-9, keep warm 70° and Booster]
- Booster on each zone [p.66]
- Programmable timer to set cooking duration and finishing time on each individual zone [up to 99 mins]
- Minute minder
- Automatic cooking duration display
- Memory recall function
- Chef mode
- Chef mode

#### - Pan move function

- Pause
- Demo mode
- Child safety lock
- Residual heat indicators
- Automatic safety shut-off
- Automatic pan detection
- Anti-overheat
- Anti-overflow

#### COOKING OUTPUT

- 5 Induction Zones
- 1 Dia. 160mm 1.4kW
- 1 Dia. 180mm 1.4kW
- 1 Dia. 180mm 2kW
- 1 Dia. 210mm 3kW
- 1 Dia. 280mm 3kW

#### OPTIONAL EXTRAS

- Cast iron induction griddle [IGRIDDLE2]
  - Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.232]
- Rated load 7.4kW
- Fuse rating 25A

#### INDUCTION HOB



See pages 66-67 for Induction Feature explanations.

#### PRODUCT CODE

C867i

#### DIMENSIONS



#### FINISH AVAILABLE

#### White Glass

\_\_\_\_

#### FEATURES

- Frameless
- Audible touch controls
- Can be flush mounted or inset
- 9 Level LED power display for each zone
- 2 Booster zones [p.66]
- Programmable timer to set cooking duration and finishing time on each individual zone [up to 99 mins]

- Child safety lock
- Residual heat indicators
- Automatic safety shut-off
- Automatic pan detection
- Anti-overheat
- Anti-overflow


#### COOKING OUTPUT

- 4 Induction Zones
- 2 Dia. 170mm 1.4kW
- 2 Dia. 210mm 3kW

#### INSTALLATION

- Diagram [p.232]
- Rated load 7.4kW
- Fuse rating 32A

#### **INDUCTION HOB**



#### **INDUCTION HOB**



#### Features

#### **BRIDGEABLE ZONES**

The C856i zones provide complete flexibility in allowing either use of 4 individual zones, the option to combine zones into 2 larger zones for use with oversized pans or fish kettles.

#### PRODUCT CODE

C864i



#### FINISH AVAILABLE Black Glass

#### **FEATURES**

- Black glass frameless
- Can be flush mounted
- Slider touch control with direct access
- 10 Level digital power display for each zone [0-9 plus Booster]
- Booster on each of the 4 zones [p.66]
- Individual timer for each of the 4 zones

#### - 99 Minute minder

- Pause function
- Child safety lock
- Residual heat indicators
- Automatic safety shut-off
- Automatic pan detection
- Anti-overheat

#### COOKING OUTPUT 4

Induction Zones

- 2 Dia. 215mm 2.1kW
- 2 Dia. 175mm 1.85kW

#### INSTALLATION

- Diagram [p.232]
- Rated load 7.4kW
- Fuse rating 25A

COOKING

### PRODUCT CODE

#### C856i



#### FINISH AVAILABLE

Black Glass

#### **FEATURES**

- Black Frameless
- Slider touch control
- Bridgeable zones
- 10 Level digital power display for each zone [0-9 plus Booster]
- Booster on each zone [p.66]
- Programmable timer for each zone to set finish time [up to 99 mins]
- Pause function
- Safety lock

#### - Residual heat indicators

- Automatic pan and small object detection
- Automatic safety shut-off
- Anti-overheat

#### COOKING OUTPUT

- 4 Induction Zones
- 4 Dia. 220mm 3kW
- 2 Dia. 220 x 400mm 4kW

#### OPTIONAL EXTRAS

- Cast iron induction griddle [IGRIDDLE2]
- Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.232]
- Rated load 7.0kW
- Fuse rating 32A



- INDUCTION HOBS
- - - 2 Alternative Dual Zones



#### **INDUCTION HOBS**



PRODUCT CODE C846i

#### DIMENSIONS

#### w:590mm

FINISH AVAILABLE Black Glass

#### **FEATURES**

#### - Frameless

- Slider touch control with direct access
- 10 Level digital power display for each zone
- [0-9 plus Booster] - Booster on each zone [p.66]
- 99 Minute timer
- Child safety lock
- Residual heat indicators
- Automatic safety shut-off
- Automatic pan detection
- Programmable timer for each zone to set finish time [up to 99 mins]

#### COOKING OUTPUT

- 4 Induction Zones
- 2 Dia. 140mm -1.5kW with Booster
- 2 Dia. 220mm -2.6kW with Booster
- INSTALLATION
- Diagram [p.232]
- Rated load 7kW
- Fuse rating 32A



#### PRODUCT CODE

C843i

DIMENSIONS

w:590mm

#### FINISH AVAILABLE

Black Glass

#### **FEATURES**

- 9 Level digital power display for each zone
- 99 Minute timer
- Child safety lock
- Residual heat indicators
- Automatic safety shut-off
- Automatic pan detection - Programmable timer for one zone to set finish time

[up to 99 mins]

#### **INDUCTION HOB - 13 AMP**





#### PRODUCT CODE C840i

#### DIMENSIONS w:590mm

FINISH AVAILABLE Black Glass

#### FEATURES

- Frameless
- Touch control
- 9 Level digital
- power display - 99 Minute timer
- Child safety lock
- Residual heat indicators
- Automatic safety shut-off
- Automatic pan detection
- Anti-overheat
- Supplied with a 13A plug for easy installation in any kitchen
- Programmable timer for one zone to set finish time [up to 99 mins]

#### 4 Induction Zones

COOKING OUTPUT

- 2 Dia. 140mm 1.5kW
- 2 Dia. 180mm 2kW

#### INSTALLATION

- Diagram [p.232]
- Rated load 7.2kW
- Fuse rating 32A

#### COOKING OUTPUT

- 4 Induction Zones
- 2 Dia. 180mm 1.5kW
- 2 Dia. 180mm 2kW

#### INSTALLATION

- Diagram [p.232]
- Rated load 3kW
- Fuse rating 13A

PLEASE NOTE: The C840i induction hob achieves a 13A connection by restricting the maximum load to 3kW, this is done by cleverly limiting the combined zones to a maximum power level sum of 12. For example if you had boiling water on power level 6 on one zone you could cook rice on power level 4 and gently warm food on level 2 on a third zone.

See pages 66-67 for Induction Feature explanations

## - Frameless - Touch control



# The Power of Electric Hobs

Caple's electric hobs are engineered with performance, versatility and ease of use in mind.

Each hob has four separate zones offering different sizes, with individual lights that glow when activated. Touch control models set seamlessly into the worktop, but if you prefer more traditional operation opt for one of the dial control models.

The smooth black glass makes cleaning easy and thanks to minimalist styling both our frameless ceramic models will fit into any type of kitchen.





#### PRODUCT CODE

C824C



#### FINISH AVAILABLE Black Glass

#### \_\_\_\_\_

- FEATURES - Frameless
- Can be flush mounted
- Touch control
- 10 Level digital power display
   [0-9 + keep warm]
- 4 Quick heat boosters
- Programmable timer for each zone [up to 99mins] to set finish time
- Minute timer
- A timer for each cooking zone
- Residual heat indicators
- Child safety lock
- Overflow protection
- Automatic safety shut-off



#### PRODUCT CODE C815C

DIMENSIONS ↔ w:590mm

FINISH AVAILABLE

Black Glass

#### FEATURES

- Frameless
- Touch control
- 9 Level digital power display
- 99 Minute timer
- Residual heat indicators
- Child safety lock
- Automatic safety shut-off

#### COOKING OUTPUT

- 4 Ceramic Plates
- 1 dia. 135mm/210mm -1.0kW - 2.2kW
- 1 dia. 110mm/180mm 0.7kW - 1.7kW
- 2 dia. 145mm 1.2kW

#### INSTALLATION

- Diagram [p.234]
- Rated load 6.3kW
- Fuse rating 25A

#### 

4 Ceramic Plates
2 Dia. 200mm – 1.8kW
2 Dia. 165mm – 1.2kW

- Diagram [p.234]
- Rated load 6kW
- Fuse rating 30A

#### ELECTRIC CERAMIC HOB



### PRODUCT CODE C808C DIMENSIONS w:590mm FINISH AVAILABLE Black Glass

#### COOKING OUTPUT

4 Ceramic Plates
2 Dia. 200mm – 1.8kW
2 Dia. 165mm – 1.2kW



- Diagram [p.233]
- Rated load 6kW
- Fuse rating 32A

FEATURES

- Frameless
- Indicator lights for each zone
- Residual heat indicators

# COOKING

74

75

#### ELECTRIC SEALED PLATE HOB



#### PRODUCT CODE C605E



FINISH AVAILABLE
Stainless Steel

#### FEATURES

- Neon indicator lights
- 6 Power levels

#### COOKING OUTPUT

4 Sealed Plates
- 1 Redspot plate: Dia. 188mm – 2kW

- 2 Regular plates: Dia. 155mm – 1kW
- 1 Regular plate:
- Dia. 188mm 1.5kW

- Diagram [p.233]
- Rated load 5.5kW
- Fuse rating 25A
- ELECTRIC HOBS



## Gas-on-Glass Hobs

Cool black or white glass. Sleek touch controls. Advanced engineering technology. If you're looking for a hob that combines contemporary design with power and functionality, this one ticks all the boxes.

That elegant glass surface doesn't just look stunning, it makes your hob simple to clean, while linked cast iron pan supports on most models let you easily transfer pans across burners or away from the heat. All burners are Flame Safe, so if a flame is extinguished for any reason, the gas supply is cut straight away. Some hobs also feature a responsive triple ring burner for extra powerful cooking.

Taking the gas-on-glass theme even further, we offer cool black or ice white tempered glass with bevelled edges for breathtakingly good looks. Precision cooking and sleek design-led finishing are the hallmark of Caple hobs.

#### PRECISION BUILT-IN

Touch controls set into black tempered glass look fabulous, but beauty is more than skin deep. Advanced digital technology gives you nine precise power levels on each burner, so they also offer an exceptional level of control. The look is pure Sense. The functionality is pure Caple.



#### TOUCH CONTROL GAS-ON-GLASS HOBS





#### PRODUCT CODE C981G

#### DIMENSIONS

 $\leftrightarrow$  w:790mm

FINISH AVAILABLE

Black Glass

#### FEATURES

- Touch control
- 9 Level digital power display for each zone
- End of cooking timer
- Child safety lock
- Residual heat indicators
- Flame safety device with auto restart
- Cast iron pan supports
- Auto electronic ignition
- LPG jets included

#### COOKING OUTPUT

#### 5 Gas Burners

- 1 Triple ring burner: 4kW
- 1 Rapid burner: 3kW
- 2 Semi-rapid burners: 1.75kW
- 1 Simmer burner: 1kW

#### INSTALLATION

- Diagram [p.233]
- Fuse rating 3A

#### PRODUCT CODE C1081G

#### DIMENSIONS

 $\leftrightarrow$  w:1000mm

#### FINISH AVAILABLE

Black Glass

#### FEATURES

- Touch control
- 9 Level digital power display for each zone
- End of cooking timer
- Child safety lock
- Residual heat indicators
- Flame safety device with auto restart
- Cast iron pan supports
- Auto electronic ignition
- LPG jets included

#### COOKING OUTPUT

- 4 Gas Burners
- 1 Triple ring burner: 4kW
- 1 Rapid burner: 3kW
- 1 Semi-rapid burner: 1.75kW
- 1 Simmer burner: 1kW

- Diagram [p.233]
- Fuse rating 3A



#### GAS-ON-GLASS HOB



#### PRODUCT CODE

C871GBK

#### DIMENSIONS

 $\leftrightarrow$  w:680mm

FINISH AVAILABLE Black Glass

#### FEATURES

- Black glass, with bevelled front edge
- Flame safety device
- Cast iron pan supports
- Auto electronic ignition
- LPG jets included

#### COOKING OUTPUT

- 5 Gas Burners
- 1 Triple ring burner: 3.00kW
- 1 Rapid burner: 2.40kW
- 2 Semi-rapid burners 1.88kW
- 1 Simmer burner: 0.9kW

- Diagram [p.233]
- Fuse rating 3A

#### GAS-ON-GLASS HOBS





C789G





C787G

#### DirectHeat



C786G

#### Features



Developed with cutting-edge design and outstanding efficiency in mind, DirectHeat+ sends the heat upwards directly towards the base of the pan via 45° inclined flame. More heat hits the base of the pan rather than escaping around the sides, therefore decreasing boiling time and bringing food to temperature more rapidly.

#### PRODUCT CODE

C789G C787G C786G

#### DIMENSIONS

$\leftrightarrow$	w:874mm	C789G
	w:700mm	C787G
	w:584mm	C786G

#### FINISH AVAILABLE

Black Glass with Stainless Steel

#### FEATURES

- Black glass with stainless steel control panel
- DirectHeat+
- Flame safety device
- Cast iron pan supports
- Auto electronic ignition
- LPG jets included

#### COOKING OUTPUT

#### 5 Gas Burners

- [C789G and C787G] - 1 Triple ring burner: 4.2kW
- 1 rapid burner: 2.7kW
- 2 semi-rapid burners: 1.75kW
- 1 simmer burner: 1.0kW
- 4 Gas Burners [C786G]
- 1 Triple ring burner: 3.6kW
- 2 semi-rapid burners: 1.75kW
- 1 simmer burner: 1.0kW

- Diagram [p233]
- Fuse rating 3A



C769G



C759G



C739G

#### PRODUCT CODE

C769G C759G C739G

#### DIMENSIONS

$\leftrightarrow$	w:900mm	C769G
	w:750mm	C759G
	w:600mm	C739G

#### FINISH AVAILABLE

Black Glass with Stainless Steel

#### FEATURES

- Stainless steel front trim
- Flame safety device
- Cast iron pan supports
- Auto electronic ignition
- LPG jets included

#### COOKING OUTPUT



- [C769G and C759G]
- 1 Triple ring burner: 3.8kW
- 1 Rapid burner: 3kW
- 2 Semi-rapid burners: 1.75kW
- 1 Simmer burner: 1kW
- 4 Gas Burners [C739G]
- 1 Rapid burner: 3kW
- 2 Semi-rapid burners: 1.75kW
- 1 Simmer burner: 1kW

- Diagram [p.233]
- Fuse rating 3A



#### **GAS-ON-GLASS HOBS**



C744G



C944G

#### PRODUCT CODE C744G C944G



w:580mm

C744G

C944G

FINISH AVAILABLE Black Glass

#### FEATURES

- Flame safety device
- Cast iron pan supports
- Auto electronic ignition
- LPG jets included

#### COOKING OUTPUT

4 Gas Burners [C744G]

- 1 Triple ring burner: 3.00kW
- 2 semi-rapid burners: 1.88kW
- 1 simmer burner: 0.9kWW

# COOKING

80

5 Gas Burners [C944G]

- 1 Triple ring burner: 3.00kW


- 1 Rapid burner: 2.40kW - 2 Semi-rapid burners 1.88kW

- 1 Simmer burner: 0.9kW

INSTALLATION

- Diagram [p.234] - Fuse rating 3A



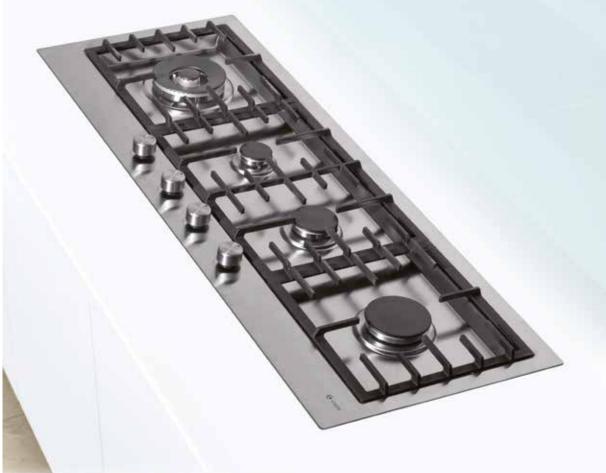

# Flush Mounted Gas Hobs

The look says it all. Designed to fit perfectly with the clean and uncluttered lines of a modern kitchen, this innovative hob offers more than superb styling, it provides real practical advantages too.

Flush mounted or inset into your worktop, the recessed hob is the ideal match for solid surface worktop materials like marble, granite or slate. Flat cast iron supports mean that you can move pans across the hob effortlessly, and Caple's Flame Safe feature gives you peace of mind – if a flame goes out – the gas supply is cut almost immediately. Both models also feature a powerful triple ring burner.

#### **CLEAN LINES**

With their elegant low-profile recessed design and smart styling, these superb hobs maintain the clean linear look of your kitchen. They're thoroughly practical too - the hob's recess catches any spills and makes it easy to wipe down and clean.



#### FLUSH MOUNTED GAS HOB



#### PRODUCT CODE C972G

#### DIMENSIONS

 $\leftrightarrow$  w:890mm

#### FINISH AVAILABLE

Stainless Steel

#### FEATURES

- Can be flush mounted or inset
- Flame safety device
- Cast iron pan supports
- Auto electronic ignition
- LPG jets included

#### COOKING OUTPUT

- 5 Gas Burners
- 1 Triple ring burner: 3.8kW
- 1 Rapid burner: 3kW
- 2 Semi-rapid burners: 1.75kW
- 1 Simmer burner: 1kW

#### INSTALLATION

- Diagram [p.234]
- Fuse rating 3A

#### FLUSH MOUNTED GAS HOB



#### PRODUCT CODE C1072G

#### DIMENSIONS

FINISH AVAILABLE

Stainless Steel

- ↔ w:1100mm
- 1 Simmer burner: 1kW

- 1 Rapid burner: 3kW

COOKING OUTPUT

- 1 Triple ring burner: 4kW

- 1 Semi-rapid burner: 1.75kW

4 Gas Burners

#### INSTALLATION

- Diagram [p.234]
- Fuse rating 3A
- FLUSH MOUNTED GAS HOBS

- Can be flush mounted or inset - Flame safety device
- Cast iron pan supports
- Auto electronic ignition
- LPG jets included

FEATURES

83

82



## Low Profile Gas Hobs

Unrivalled performance and looks, coupled with ease of fitting. Caple low profile hobs are designed to sit on top of the work surface with the smallest of edges. They give you the appearance of a professional kitchen with added Caple refinement.

#### LOW PROFILE GAS HOBS



C873G



C866G



C848G

#### PRODUCT CODE

C873G C866G C848G

#### DIMENSIONS

$\leftrightarrow$	w:890mm
	w:750mm
	w:590mm

C873G C866G C848G

#### FINISH AVAILABLE

Stainless Steel

#### FEATURES

- Flame safety device
- Cast iron pan supports
- Auto electronic ignition
- LPG jets included

#### COOKING OUTPUT

5 Gas Burners

- [C873G and C866G] - 1 Triple ring burner: 3.8kW
- 1 Rapid burner: 3kW
- 2 Semi-rapid burners: 1.75kW
- 1 Simmer burner: 1kW
- 4 Gas Burners [C848G]
- 1 Rapid burner: 3kW
- 2 Semi-rapid burners: 1.75kW
- 1 Simmer burner: 1kW

- Diagram [p.234]
- Fuse rating 3A



#### GAS HOBS



C774G



C767G



C749G

#### GAS HOB



C706G

#### PRODUCT CODE

C774G C767G C749G

#### DIMENSIONS

w:860mm C774G
 w:750mm C767G
 w:590mm C749G

#### FINISH AVAILABLE

Stainless Steel

#### FEATURES

- Flame safety device
- Cast iron pan supports
- Auto electronic ignition
- LPG jets included

#### COOKING OUTPUT

5 Gas Burners [C774G and C767G]

- 1 Triple ring burner: 3.3kW
- 1 Rapid burner: 3kW
- 2 Semi-rapid burners: 1.75kW
- 1 Simmer burner: 1kW
- 4 Gas Burners [C749G]
- 1 Rapid burner: 3kW
- 2 Semi-rapid burners: 1.75kW
- 1 Simmer burner: 1kW

#### INSTALLATION

- Diagram [p.234]
- Fuse rating 3A

#### PRODUCT CODE

C706G

DIMENSIONS

FINISH AVAILABLE Stainless Steel

#### FEATURES

- Flame safety device
- Enamelled pan supports
- Auto electronic ignition
- LPG jets included

#### COOKING OUTPUT

4 Gas Burners

- 1 Triple ring burner: 3.0kW
- 2 Semi-rapid burners: 1.88kW
- 1 Simmer burner: 0.9kW

- Diagram [p.234]
- Fuse rating 3A



# Modular Hobs

Now you can build the perfect hob for your needs. Combine gas, electric, induction and modular extraction for a truly bespoke solution that's sure to impress.

Combine two, three, four or more modules, of any type and in any sequence. Introduce induction cooking into your kitchen by combining it with gas or electric, or wow with tepan [a grill plate perfect for flash frying]. Our auto-ignition gas hob has cast iron pan supports. When coupled with powerful downdraft extraction it offers a clean, fully integrated design throughout – bespoke and beautiful.



#### **TEPAN HOB**



#### PRODUCT CODE C995T



FINISH AVAILABLE
Stainless Steel with Black Glass

#### FEATURES

- Black glass frame
- Automatic stop and temperature limiter
- Residual heat indicator
- Maximum temperature 240°C

#### COOKING OUTPUT

1 Cooking Zone - 380 x 380mm – 2.5kW

#### INSTALLATION

- Diagram [p.235]
- Rated load 2.5kW
- Fuse rating 16A

#### INDUCTION MODULAR HOB



#### PRODUCT CODE

C996i

#### DIMENSIONS



#### FINISH AVAILABLE



#### FEATURES

- Polished aluminium trim
- Touch control
- 9 Level digital power display for each zone
- Booster function on both zones to access maximum temperature quickly

- Timer [up to 99mins] with audible alarm and auto switch-off
- Automatic stop and temperature limiter
- Child safety lock
- Residual heat indicators
- Automatic pan detection

#### COOKING OUTPUT

- 2 Induction Zones
- 1 Dia. 200mm 2kW [with 3kW Booster]
- 1 Dia. 160mm 1.6kW

#### INSTALLATION

- Diagram [p.235]
- Rated load 3.6kW
- Fuse rating 16A

#### **GAS-ON-GLASS MODULAR HOB**



#### PRODUCT CODE

C993G

#### DIMENSIONS

 $\leftrightarrow$  w:380mm

FINISH AVAILABLE Black Glass

#### FEATURES

- Polished aluminium trim
- Flame safety device

- Cast iron pan support
- Auto electronic ignition
- LPG jets included

#### COOKING OUTPUT

#### 2 Gas Burners

- 1 Rapid burner: 3kW
- 1 Semi-rapid burner: 1.75kW

- Diagram [p.235]
- Fuse rating 3A

#### **INDUCTION MODULAR HOB**



PRODUCT CODE C994i



FINISH AVAILABLE Black Glass

#### FEATURES

- Frameless
- Audible touch control

PRODUCT CODE

- Audible touch control

each zone

limiter - Child safety lock - Residual heat indicators

- 9 Level digital power display for

- Timer [up to 99mins] with audible alarm and auto switch-off - Automatic stop and temperature

- 9 Level digital power display for each zone
- Timer [up to 99mins] with audible alarm and auto switch-off

- Automatic stop and temperature limiter
- Child safety lock
- Residual heat indicators
- Automatic pan detection

#### COOKING OUTPUT

- 2 Induction Zones
- 1 Dia. 140mm 1.5kW
- 1 Dia. 180mm 2kW

#### INSTALLATION

- Diagram [p.235]
- Rated load 3.5kW
- Fuse rating 16A

#### **ELECTRIC CERAMIC MODULAR HOB**



#### C892C 2 Ceramic Plates - 1 Dia. 165mm - 1.2kW - 1 Dia. 200mm - 1.8kW DIMENSIONS :288mm INSTALLATION - Diagram [p.235] FINISH AVAILABLE - Rated load 3.3kW Black Glass - Fuse rating 16A FEATURES - Frameless

- COOKING OUTPUT

COOKING

88

89





# Induction Downdraft Extractors

# SEAMLESS INTEGRATION, AND UNMISTAKABLE STYLING.

As the name suggests induction downdrafts combine intuitive induction hobs with the added benefit of integrated, powerful downdraft extraction.

You can choose from a traditional downdraft that rises from the surface and disappears beneath the worktop when inactive or a fully integrated option that extracts from the surface.

#### SPACE SAVING INSTALLATION


With some models a unique space-saving installation can be used with minimal ducting and the motor located behind the plinth which means you can still utilise the cabinets directly underneath the hob. For installation see p. 235-236. With the DD940BK, you have the option to use our new Plasma technology. This allows you to recirculate the air with very efficient odour removal process.



The powerful, ultra quiet motor draws the cooking vapour through the 12 stage filter, removing grease and moisture.



Discreetly positioned behind the plinth, the motor draws the air through the ducting, on towards the filters.



The first filter creates the 4th stage of matter, Plasma. A trusted technology developed by the German university of Göttingen. The Plasma removes 95% of the odours passing through it.



A carbon filter removes any remaining odours and has an anticipated life span of 5 years or more when used with a plasma filter.



Clean air is then recirculated back into the room.



#### INDUCTION DOWNDRAFT EXTRACTOR

#### PRODUCT CODE DD940BK

#### DIMENSIONS

→ w:900mm

#### PERFORMANCE

e Energy Class A Fluid dynamic efficiency A Grease absorption A Annual Consumption 41.5kWh/yr Max. extraction 585m<sup>3</sup>/h Max. noise level 61dB

#### FINISH AVAILABLE Black Glass

#### GENERAL FEATURES

- 5 Year guarantee

#### FEATURES

- Hob - Frameless
- Can be flush mounted
- Slider touch control
- Large cooking area
- 10 Power level digital display for each zone [0-9 plus booster]
- Booster function on all zones, including Auto Boost mode
- Bridge function to combine 2 zones
- Timer for each zone / minute minder

- Memory recall function
- 3 preset temperatures settings [bake 42°C, keep warm 70°C, boil control 92°C]
- Pause function
- Child safety lock
- Residual heat indicators
- Automatic safety shut-off
- Anti-overheat
- Auto pan detection

#### Downdraft

- Touch control
- 4 speeds
- Auto timer
- Aluminium grease filters
- Ducting spigot size 150mm

- Plinth motor includedOptional plasma filter
- **COOKING OUTPUT** - 190 X 220mm - 3.7kW

#### -----

#### OPTIONAL EXTRAS

- Plasma filter [PLASMABOX]
- Recirculation kit [CAP57CF]
- Removable grille cover [GRILLE/DD940BK]
- Cast iron induction griddle [IGRIDDLE2]

Visit caple.co.uk for full range

#### INSTALLATION

- Space saving installation diagram [p.235]
- Venting Kits [p.144]







GRILLE/DD940BK

PLASMA EXPLAINED Watch our plasma video online at www.caple.co.uk



#### INDUCTION DOWNDRAFT EXTRACTOR

#### PRODUCT CODE DD935BK

#### DIMENSIONS w:780mm $\leftrightarrow$

#### PERFORMANCE

e Energy Class B Max. extraction 655m3/h [speed 1 286m3/h, speed 2 374m3/h, speed 3 497m3/h, speed 4 655m3/h]

FINISH AVAILABLE Black Glass

FEATURES Hob

#### - Black glass with flush black downdraft grille

- Frameless
- Slider touch controls
- 13 power levels [0-9, bake 42°C, keep warm 70°C, boil control 94°C and Booster]
- Booster function on all zones
- Timer function
- Keep warm function
- Pause and memory recall function
- Bridge function
- Automatic heat-up function
- Child safety lock
- Residual heat indicators
- Anti-overheat protection
- Automatic safety shut-off
- Auto pan detection

#### Downdraft

- 4 Speeds [inc. Boost function]
- Auto timer switch-off after 10 mins
- Aluminium grease filter
- Ducting spigot size 150mm
- Motor included
- Recirculation kit available

#### COOKING OUTPUT

4 Induction Zones - 184x220mm - 3.7kW

#### OPTIONAL EXTRAS

- Washable charcoal filter [CAP76CF]
- Cast iron induction griddle [IGRIDDLE2]
- Visit caple.co.uk for full range

#### INSTALLATION

- Space saving installation diagram [p.236]
- Venting Kits [p.144]

 $9^{2}$ 

93



# Extraction

A well-engineered extractor hood does more than just help to capture odours from your kitchen. Be bold, and use it as a visual focal point too.



## Choosing the perfect hood

We've designed one for every kind of kitchen. Striking colours, exceptional finishes, and plenty of functionality.

Extractors and hoods are designed to remove cooking odours, moisture and grease from the cooking environment. The extractor continually removes and filters the air when on. It then, either, returns the filtered air back in to the room or expels it through and external vent. The greater the extraction rate the more effectively this is done.

#### **GETTING THE BEST FROM YOUR HOOD**

One useful technique is to switch on the extractor or hood 15 minutes before you begin cooking. This creates kinetic air circulation within the kitchen carrying the air out more effectively. It is also advisable to keep it running for a further 15 minutes after you have finished cooking.

You can sit down and enjoy the results of your culinary skills whilst your Caple extractor or hood gets on with its job.

Once you have chosen your extractor, it is important to pair it with the correct venting. It is essential the stated ducting diameter is used, we also recommend rigid ducting to ensure you get the maximum performance. Not only will this prolong the life of your extractor, it will also improve efficiency.

If you choose to vent your extractor to the outside world, look out for the venting symbol shown to assist you in choosing the correct product. Please see page 144-145 for more information.







#### INDUCTION DOWNDRAFT

This award-winning category of extraction is ideal for open plan living. The powerful extraction eradicates cooking odours from the room and the minimal aesthetics discreetly blends into the worktop for a seamless look. See our range of Induction downdraft hobs in the hob section, pages 90-93.

#### This type of counter extractor is installed behind or

alongside your hob. When you need it, just press the button and it glides up in to position.



#### **CEILING HOODS**

They're unobtrusive and they save you space too. You can choose different motors and have complete control over extraction rates.



#### ISLAND HOODS

Better suited to larger kitchens. You can suspend them over a central island unit to make a stunning focal point.





#### WALL CHIMNEY HOODS

Available in all kinds of sizes, styles and finishes. Great for a dramatic centrepiece.

## BUILT-UNDER HOODS

Ideal for smaller kitchens. They're cleverly integrated into the underside of kitchen units.





#### CONVENTIONAL HOODS

This type fits snugly beneath a kitchen unit, with controls usually found on the front.

97

#### INTEGRATED HOODS

Discretely hidden behind kitchen furniture, and pulled out when needed.



# Downdraft Extractors

Caple downdraft extractors are the epitome of intelligent thinking in kitchen design. With an ingenious under-counter installation, wall space is kept clear and when integrated into an island unit, views across the kitchen remain uncluttered.

A downdraft extractor can be housed either behind or alongside a hob, in an island unit or within a base against a wall. Fitting elegantly into the surface until activated, it rises out of the worktop beyond the height of the pans to extract odours directly from the cooking area. These smart extractors deliver high extraction rates and give you a choice of motors and motor positioning options to suit your kitchen design. For example, your motor could be situated under the floor, on an external wall or in a cupboard, so noise can be virtually eliminated [p.112-117]. With real versatility, our downdraft extractors can expel air via ducting or recirculate it using charcoal filters.

#### SLEEK STYLING

Most of our downdrafts feature touch control technology and are designed to complement the appliances within the Sense Premium and Sense ranges.

#### **SMOOTH OPERATOR**

At the touch of a button, the DD925CO rises smoothly up from its flush, retracted position.



#### **MOTOR CHOICES**

Downdraft extractors will need to be purchased with a motor. For the full range please see p.112-113.




#### **INVISIBLE MOTOR**

The DDMEXT28 is designed to be easily and discreetly installed behind the plinth without the requirement of ducting to the outside of the building. For more details see p.113.

#### FLUSH FITTING

Designed to tuck neatly away into your work surface until needed, then acting as a sleek centrepiece when in use.



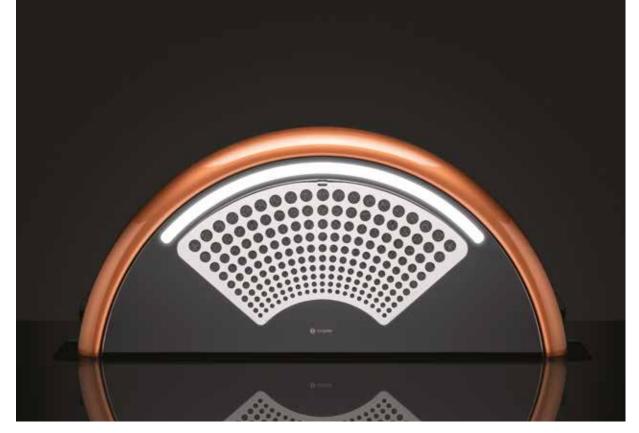

# NOSTA

#### DOWNDRAFT EXTRACTOR WITH LIGHT

#### PRODUCT CODE

DD925CO

DIMENSIONS

#### ⇔ w:880mm

#### PERFORMANCE

e Energy Class A-C For energy and performance see p.114-117

#### FINISH AVAILABLE

Black glass with copper

#### FEATURES

- For use with gas or electric hobs
- 4 Speeds [inc. Boost function]
- Auto timer switch-off after 10mins
- 14W white LED light

- Remote control operated
- Polished stainles steel
- grease filters
- Ducting spigot size 150mm
- Motor not included
- Recirculation kit available

#### MOTOR CHOICES

- Downdraft extractors will need to be purchased with a motor. For the full range please see p.112-117.

#### OPTIONAL EXTRAS

 Recirculation kit [CAP68CF
 only for use with motors DDMEXT11 and DDMEXT28]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.236]
- Venting Kits [p.144]
- The electrics box must be located at least 650mm from the hob



DD925CO closed

#### DOWNDRAFT EXTRACTOR WITH LIGHT

#### PRODUCT CODE

DD120BK

#### DIMENSIONS

→ w:1175mm

#### PERFORMANCE

e Energy Class A-C For energy and performance see p.114-117

#### FINISH AVAILABLE

Black Glass with Stainless Steel

#### FEATURES

- Illuminated touch controls
- For use with gas or electric hobs
- Perimetrical extraction for reduced noise and increased pressure resulting in improved motor performance
- 4 Speeds [inc.Boost function]

- Auto timer switch-off after 10mins
- Bright 21W white neon light
- Aluminium grease filters
- Required ducting size 150mm
- Motor not includedRecirculation kit available

#### MOTOR CHOICES

- Downdraft extractors will need to be purchased with a motor. For the full range please see p.112-117.

#### OPTIONAL EXTRAS

Recirculation kit [CAP69CF
 only for use with motors
 DDMEXT11 and DDMEXT28]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.236]
- Venting Kits [p.144]
- The electrics box must be located at least 650mm from the hob



#### Venting choices

Ensure you purchase the correct venting for your Caple extractor. For the full range please see p.144-145

100

#### IOI





# FLUSH DOWNDRAFT EXTRACTORS WITH LIGHT

#### PRODUCT CODE

Stainless Steel	DD911SS
White Glass	DD911WH
Black Glass	DD911BK

#### DIMENSIONS

 $\leftrightarrow$  w:875mm

#### PERFORMANCE

e Energy Class A-C For energy and performance see p.114-117

#### FINISH AVAILABLE



Stainless Steel



Black Glass with Stainless Steel

#### FEATURES

- Illuminated touch control
- For use with gas or electric hobs
- Perimetrical extraction for reduced noise and increased pressure resulting in improved motor performance
- 4 Speeds [inc. Boost function]

- Auto timer switch-off after 10mins
- Bright 14W white neon light
- Aluminium grease filters
- Required ducting size 150mm 🔊
- Motor not included
- Recirculation kit available

#### MOTOR CHOICES

- Downdraft extractors will need to be purchased with a motor. For the full range please see p. 112-117

#### OPTIONAL EXTRAS

- Recirculation kit [CAP43CF - only for use with motors DDMEXT11 and DDMEXT28]

Visit caple.co.uk for full range

- Diagram [p.237]
- Venting Kits [p.144]
- The electrics box must be located at least 650mm from the hob



# PUSH DOWNDRAFT EXTRACTOR WITH LIGHT











#### PRODUCT CODE DD901BK



 $\leftrightarrow$  w:810mm



FINISH AVAILABLE

Black Glass with Stainless Steel

#### FEATURES

- Electronic push button controls
- Perimetrical extraction for reduced noise and increased pressure resulting in improved motor performance
- For use with gas or electric hobs
- 4 Speeds [inc. Boost function] Auto timer switch-off
- after 10mins
- 2 x 3.9W white LED lights
- Stainless steel and aluminium grease filters
- Required ducting size 150mm
- Motor not included
- Recirculation kit available

#### Venting choices

AN)

Ensure you purchase the correct venting for your Caple extractor. For the full range please see p.144-145

#### MOTOR CHOICES

- Downdraft extractors will need to be purchased with a motor. For the full range please see p. 112-117

#### OPTIONAL EXTRAS

 Recirculation kit [CAP43CF
 only for use with motors DDMEXT11and DDMEXT28]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.237]
- Venting Kits [p.144]
- The electrics box must be located at least 650mm from the hob

COOKING

102



#### MODULAR FLIP DOWNDRAFT EXTRACTOR



#### Venting choices

Ensure you purchase the correct venting for your Caple extractor. For the full range please see p.144-145



PRODUCT CODE DD522BK



#### PERFORMANCE

e Energy Class B-C For energy and performance see p.114-115

#### FINISH AVAILABLE

Black Glass with Stainless Steel

#### FEATURES

- Illuminated touch controls
- For use with gas or electric hobs
- Perimetrical extraction for reduced noise and increased pressure resulting in improved motor performance
- Extracts from both sides, ideal for installation between modular hobs
- 4 Speeds
- Auto timer switch-off after 10mins

- Aluminium grease filters
- Required ducting size 150mm 🔊
- Motor not included
- Recirculation kit available

#### MOTOR CHOICES

- Downdraft extractors will need to be purchased with a motor. For the full range please see p.112-113.

#### OPTIONAL EXTRAS

- Recirculation kit [CAP72CF - only for use with motor DDMEXT28]

Visit caple.co.uk for full range

- Diagram [p.237]
- Venting Kits [p.144]
- The electrics box must be located at least 650mm from the hob

#### DOWNDRAFT EXTRACTORS



DD606SS

#### PRODUCT CODE

Stainless Steel DD606SS Black Glass DD606BK

#### DIMENSIONS

→ w:575mm

#### PERFORMANCE

е

Energy Class B-C For energy and performance see p.114-115

#### FINISH AVAILABLE

Stainless Steel

Black Glass with Stainless Steel

#### FEATURES

- Electronic controls on stainless steel finish, touch control on black glass finish
- For use with gas or electric hobs
- Perimetrical extraction for reduced noise and increased pressure resulting in improved motor performance

- 4 Speeds [inc. Boost function]
- Auto timer switch-off after 10mins
- Aluminium grease filters
- Required ducting size 150mm
- Motor not included
- Recirculation kit available

#### MOTOR CHOICES

- Downdraft extractors will need to be purchased with a motor. For the full range please see p.112-113.

#### OPTIONAL EXTRAS

 Recirculation kit [CAP27CF
 only for use with motors DDMEXT11 and DDMEXT28]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.237]
- Venting Kits [p.144]
- The electrics box must be located at least 650mm from the hob

FLIP DOWNDRAFT



DD903BK Open

PRODUCT CODE DD903BK

#### DIMENSIONS

 $\leftrightarrow$  w:845mmm

#### PERFORMANCE

e Energy Class A-C For energy and performance see p.116-117

#### FINISH AVAILABLE



#### FEATURES

- Illuminated touch control
- Motor speed indicator light
- For use with gas or electric hobs
- Perimetrical extraction for reduced noise and increased pressure resulting in improved motor performance
- 4 Speeds
- Auto timer switch-off after 10mins
- Aluminium grease filters

# COOKING

104

- Required ducting size 150mm
- Motor not included
- Recirculation kit available

#### MOTOR CHOICES

- Downdraft extractors will need to be purchased with a motor. This model can be used with DDMEXT20, DDMEXT 27 and DDMEXT30. For the full range please see p.112-113.

#### OPTIONAL EXTRAS

- Recirculation kit [2 x CAP66CF - only for use with motor DDMEXT28]


Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.237]
- Venting Kits [p.144]
- The electrics box must be located at least 650mm from the hob

105

# DOWNDRAFT EXTRACTORS

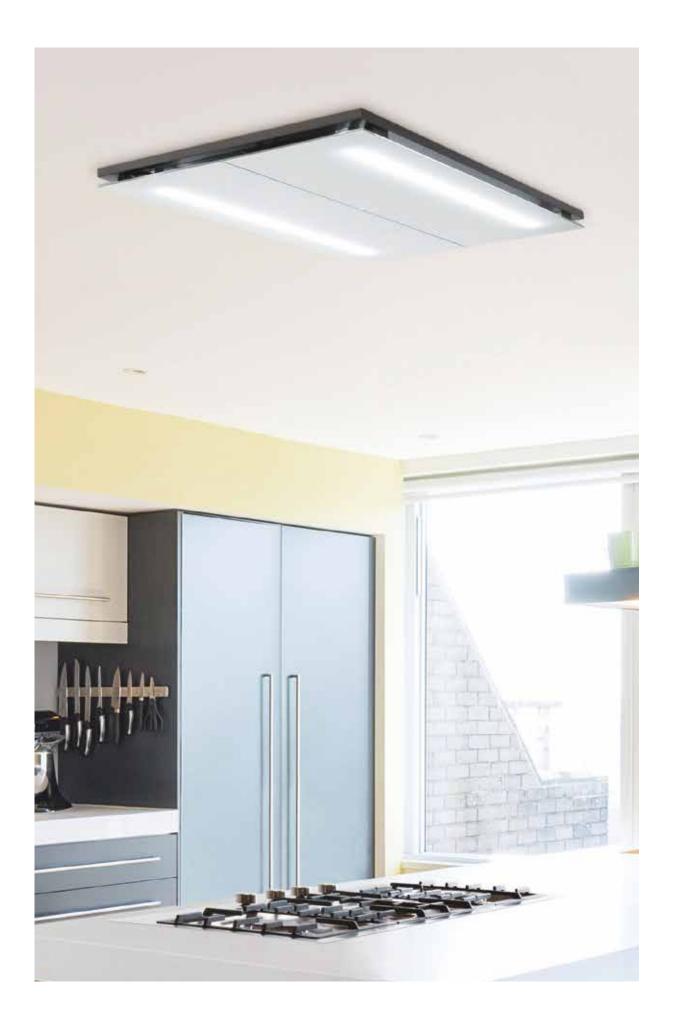

# Ceiling Hoods

Style is nothing without functionality. Naturally, Caple's ceiling extractors come with both, as standard.

They're available in various sizes and engineered to achieve the very highest extraction rates. There's also a choice of motors, which can be positioned in a range of locations to reduce noise and free-up space. CEILING HOODS

COOKING



Every Caple ceiling extractor uses our perimetric extraction system, which draws air in through narrow apertures around the full perimeter of the pan. It means higher air pressure, greater efficiency and less noise.

#### **CREATING THE RIGHT ATMOSPHERE**

You can also select just the right kind of lighting you want for your kitchen - from bright white to a soft, cosy, glow.

#### CONTROL AT YOUR FINGERTIPS

Our user-friendly remote control places power and lighting functions within easy reach. It also allows you to set the handy timer function, which automatically switches off the extractor after 10 minutes. When you leave your kitchen you know that any odours will be gone by the time you return.

#### **CENTRE STAGE**

We love the challenge of making functionality look stunning. Our hoods represent the epitome of contemporary design and technology.

Perfectly complementing any other Caple product, our ceiling hoods provide performance and styling like no other.


LED strip lighting, white glass finish and intelligent features ensure it has a place not only as a talking point in your kitchen, but an invaluable and practical addition.

#### MOTOR CHOICES

Some models have unique built-in motors, others will need to be purchased with a motor. To get the right power for you see our full range of motors on p.112-113.



# CEILING HOOD WITH BUILT-IN MOTOR





\*Image showing recessed fitting option

#### PRODUCT CODE

CE1000

е

#### DIMENSIONS

→ w:1000mm

#### PERFORMANCE

Energy Class B Max. extraction 757m<sup>3</sup>/h Max. noise level 61dB[A] Fluid dynamic efficiency A Grease absorption F

#### FINISH AVAILABLE

White Glass with Stainless Steel

#### FEATURES

- Motor included
- Remote control included
- Perimetrical extraction for reduced noise and increased pressure resulting in improved motor performance
- Can be fitted with motor exposed or recessed
- Suitable for recirculation of ducted installation
- 4 Speeds
- 2 x 15.5W LED strip lights [dimmable]
- Auto timer switch-off after 10mins
- Aluminium grease filters
- Ducting spigot size 150mm

#### OPTIONAL EXTRAS

 Washable carbon filter [CAP59CF]

Visit caple.co.uk for full range

- INSTALLATION
- Diagram [p.238]
- Venting Kits [p.144]

## CEILING HOOD WITH BUILT-IN MOTOR



\*Image showing recessed fitting option

#### PRODUCT CODE

Stainless steel CE1122SS White CE1122WH

#### DIMENSIONS

ightarrow w:1100mm

#### PERFORMANCE

e Energy Class B Max. extraction 753m<sup>3</sup>/h Max. noise level 62dB[A] Fluid dynamic efficiency A Light efficiency E Grease absorption F

#### FINISH AVAILABLE

Stainless Steel



#### FEATURES

- Remote control included
- Perimetrical extraction for reduced noise and increased pressure resulting in improved motor performance
- 4 Speeds
- 2 x 18.5W LED strip lights with dimmer function
- Auto timer switch-off after 10mins
- Aluminium grease filters
- Ducting spigot size 150mm
- Motor included

#### OPTIONAL EXTRAS

- Recirculation kit [CAP64CF]
  - Visit caple.co.uk for full range


#### INSTALLATION

Diagram [p.238]Venting Kits [p.144]

# 108

109

CEILING HOODS

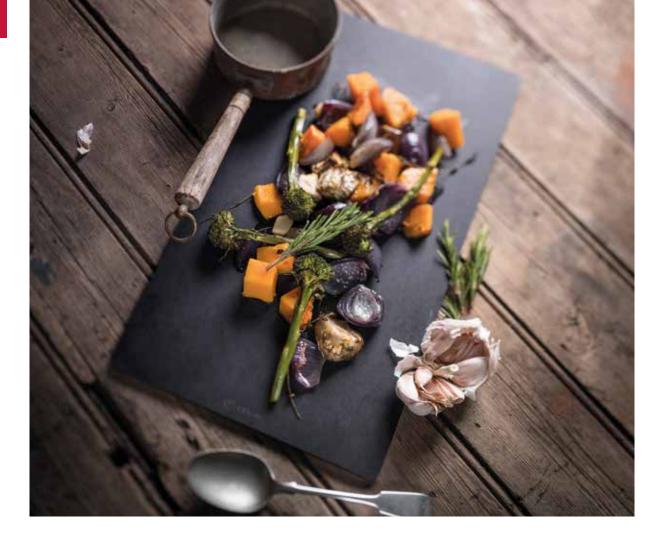

#### **CEILING HOOD**

#### PRODUCT CODE

CE920WH

#### DIMENSIONS

 $\leftrightarrow$  w:900mm

#### PERFORMANCE

Energy Class A++ - C For energy and performance see p.116-117

#### FINISH AVAILABLE

White Glass with Stainless Steel

#### FEATURES

- Remote control included
- Perimetrical extraction for reduced noise and increased pressure resulting in improved motor performance
- 4 Speeds
- 3 x 2.5W LED lights [dimmable]

- Auto timer switch-off after 10mins
- Aluminium grease filters
- Ducting spigot size 150mm
- Motor not included

#### OPTIONAL EXTRAS

- Washable carbon filter [CAP77CF]

Visit caple.co.uk for full range

#### MOTOR CHOICES

 Ceiling extractors will need to be purchased with a motor. For the full range please see p. 112-113

#### INSTALLATION

- Diagram [p.238]
- Venting Kits [p.144]



#### **CEILING HOOD**

#### **CEILING HOODS**



#### PRODUCT CODE CE1101

#### DIMENSIONS

↔ w:1100mm

#### PERFORMANCE

e Energy Class A+ - C For energy and performance see p.116-117

#### FINISH AVAILABLE

Stainless Steel

#### **FEATURES**

- Remote control included
- Perimetrical extraction for reduced noise and increased pressure resulting in improved motor performance

#### Venting choices

Ensure you purchase the correct venting for your Caple extractor. For the full range please see p.144-145



- 4 x 16W dichroic lights
- with dimmer - Auto timer - switch off after 10mins
- Aluminium grease filters - Required ducting
- size 150mm - Ducted only installation
- Motor not included

#### MOTOR CHOICES

- Ceiling extractors will need to be purchased with a motor. For the full range please see p.112-113.

#### INSTALLATION

- Diagram [p.238]
- Venting Kits [p.144]

P



#### PRODUCT CODE

Stainless Steel CE902SS White CE902WH

CE902SS

#### DIMENSIONS

#### w:900mm

#### PERFORMANCE

e Energy Class A++-B For energy and performance see p.116-117

#### FINISH AVAILABLE

#### Stainless Steel White Glass

## FEATURES

- Remote control included
- Perimetrical extraction for reduced noise and increased pressure resulting in improved motor performance
- 4 Speeds [inc. Boost function]

#### - 2 x 6.5W LED light strips with dimmer function

- Aluminium grease filters
- Required ducting size 150mm

#### - Ducted only installation

- Motor not included

#### MOTOR CHOICES

- Ceiling extractors will need to be purchased with a motor. For the full range please see p.112-113.

#### INSTALLATION

- Diagram [p.238]
- Venting Kits [p.144]

# CEILING HOODS

COOKING

IIO

 $\Pi$ 

# EXTRACTION MOTOR OPTIONS





#### PERFORMANCE

e For performance see p.114-117

#### FEATURES

- Motor for use with Caple downdraft extractors only [cannot be used with Caple ceiling hoods]
- For installation in cabinet fixing directly to the downdraft body
- Aluminium die-cast construction
- Required ducting size 150mm

#### INSTALLATION

- Diagram [p.238]
- Venting Kits [p.144]



PRODUCT CODE DDMEXT21

#### PERFORMANCE

e For performance see p.114-117

#### FEATURES

- Motor for use with Caple downdraft or ceiling extractors
- For installation in ceiling cavity or floor space
- 7m long electrical connection cable [allowing motor installation up to 7m from the extractor]
- Aluminium die-cast construction
- Required ducting size 150mm
- Rigid ducting must be used

#### INSTALLATION

- Diagram [p.238]
- Venting Kits [p.144]



PRODUCT CODE DDMEXT25

#### PERFORMANCE

e For performance see p.114-117

#### FEATURES

- Motor for use with Caple downdraft or ceiling extractors
- For installation in ceiling cavity or floor space
- 7m long electrical connection cable [allowing motor installation up to 7m from the extractor]
- Aluminium die-cast construction
- Required ducting size 150/200mm
- Rigid ducting must be used

#### INSTALLATION


- Diagram [p.238]
- Venting Kits [p.144]



DDMEXT11 with downdraft







DDMEXT25 for ceiling

 Definition
 Definition

 with downdraft
 for ceiling
 with downdra

 Due to the power and fitment of our external motors, rigid ducting must be used.
 be used.





#### PRODUCT CODE DDMEXT28

#### PERFORMANCE

е For performance see p.114-117

#### FEATURES

- Motor for use with Caple downdraft extractors only [cannot be used with Caple ceiling hoods]
- For easy installation behind the plinth
- Aluminium die-cast construction
- Required ducting size 150mm
- Rigid ducting must be used
- TO BE USED IN RECIRCULATION MODE ONLY [RECIRCULATION KIT REQUIRED, PG 128-131]

#### INSTALLATION

- Diagram [p.238]



DDMEXT28 with downdraft

#### PRODUCT CODE DDMEXT30

#### PERFORMANCE

е For performance see p.114-117

#### FEATURES

- Motor for use with Caple downdraft or ceiling extractors
- For installation on outside wall
- 7m long electrical connection cable [allowing motor installation up to 7m from the extractor]
- Stainless steel die-cast construction
- Required ducting 🔊 size 150mm
- Rigid ducting must be used

#### INSTALLATION

- Diagram [p.238]

DDMEXT30

with downdraft

- Venting Kits [p.144]



#### PRODUCT CODE DDMEXT40

#### PERFORMANCE

е For performance see p.114-117

#### FEATURES

- Motor for use with Caple downdraft or ceiling extractors
- For installation on outside wall
- 7m long electrical connection cable [allowing motor installation up to 7m from the extractor]
- Stainless steel die-cast construction
- Required ducting size 150/200mm
- Rigid ducting must be used

#### INSTALLATION

#### - Diagram [p.238

- Venting Kits [p.144]



#### with downdraft

DDMEXT40 for ceiling

for ceiling Due to the power and fitment of our external motors, rigid ducting must be used.

DDMEXT30

COOKING

II2

113

#### MOTOR PERFORMANCE

You can choose from an extensive range of Caple motors to go with your extractor.

To help you decide which motor suits your needs this table shows the motor combinations and the specific associated performance levels.

If you require further information please contact us directly.

DOWNDRAFTS         DDMEXT11         150           DD120BK         DDMEXT21         150           DDMEXT25         150           DDMEXT25         200           DDMEXT25         150           DDMEXT28         150           DDMEXT30         150           DDMEXT40         200           DD9115S         DDMEXT40         200           DD9118K         DDMEXT25         150           DD911WH         DDMEXT25         150           DDMEXT30         150         150           DDMEXT40         200         200           DD911WH         DDMEXT25         150           DDMEXT30         150         200           DDMEXT40         200         200           DDMEXT40         200         200           DDMEXT40         150         200           DDMEXT40         150         200           DDMEXT21         150         200           DDMEXT21         150         200           DDMEXT21         150         200           DDMEXT25         150         200           DDMEXT25         150         200           DDMEXT25         150	PRODUCT CODE	MOTOR CHOICE	DUCTING OUTLET SIZE [mm]
DDMEXT21150DDMEXT25150DDMEXT25200DDMEXT28150DDMEXT30150DDMEXT40150DDMEXT40200DD911SSDDMEXT40DD911BKDDMEXT25DD911WHDDMEXT25DDMEXT28150DDMEXT40150DDMEXT40150DDMEXT28150DDMEXT28150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT21150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT21150DD606BKDDMEXT21DDMEXT30150DDMEXT40200DDMEXT30150DDMEXT40200DDMEXT30150DDMEXT30150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150	DOWNDRAFTS		
DDMEXT25         150           DDMEXT25         200           DDMEXT28         150           DDMEXT30         150           DDMEXT40         150           DDMEXT40         200           DD911S5         DDMEXT40         200           DD911BK         DDMEXT21         150           DD911WH         DDMEXT25         150           DDMEXT30         150         150           DD911WH         DDMEXT25         200           DDMEXT30         150         150           DDMEXT25         200         150           DDMEXT30         150         150           DDMEXT40         150         200           DDMEXT40         150         200           DDMEXT40         150         200           DDMEXT40         150         200           DDMEXT28         150         200           DDMEXT28         150         200           DDMEXT28         150         200           DDMEXT29         200         150           DDMEXT20         150         200           DDMEXT20         150         200           DDMEXT30         150 <t< td=""><td>DD120BK</td><td>DDMEXT11</td><td>150</td></t<>	DD120BK	DDMEXT11	150
DDMEXT25200DDMEXT28150DDMEXT30150DDMEXT40150DDMEXT40200DD911SSDDMEXT11DD911WHDDMEXT25DD911WHDDMEXT25DDMEXT30150DDMEXT40200DDMEXT25150DD911WHDDMEXT25DDMEXT28150DDMEXT30150DDMEXT40200DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT21150DDMEXT30150DD606SSDDMEXT11DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT40200DD522BKDDMEXT21DDMEXT30150		DDMEXT21	150
DDMEXT28150DDMEXT30150DDMEXT40150DDMEXT40200DD911SSDDMEXT11DD911BKDDMEXT21DD911WHDDMEXT25DDMEXT20150DDMEXT28150DDMEXT30150DDMEXT40200DD911BKDDMEXT28DDMEXT30150DDMEXT30150DDMEXT40150DDMEXT40150DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT25150DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT40150DDMEXT40200DDMEXT30150DDMEXT40150		DDMEXT25	150
DDMEXT30150DDMEXT40150DDMEXT40200DD911SSDDMEXT11DD911BKDDMEXT21DD911WHDDMEXT25DDMEXT28150DDMEXT28150DDMEXT30150DDMEXT40200DDMEXT40200DDMEXT40150DDMEXT40200DDMEXT40150DDMEXT40200DDMEXT40150DDMEXT28150DDMEXT28150DDMEXT30150DDMEXT28150DDMEXT25150DDMEXT25150DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT40200DDMEXT40150DDMEXT40200DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT21150DDMEXT21150DDMEXT21150DDMEXT25150DDMEXT28150DDMEXT28150DDMEXT28150		DDMEXT25	200
DDMEXT40150DD911SSDDMEXT40200DD911BKDDMEXT21150DD911WHDDMEXT25150DD911WHDDMEXT28150DDMEXT28150150DDMEXT30150150DDMEXT40150200DD901BKDDMEXT11150DD901BKDDMEXT28150DDMEXT28150150DDMEXT28150150DDMEXT28150150DDMEXT28150150DD606SSDDMEXT11150DD606BKDDMEXT25150DDMEXT28150150DDMEXT28150150DDMEXT28150150DDMEXT28150150DDMEXT40150150DDMEXT40150150DDMEXT40150150DDMEXT40150150DDMEXT30150150DDMEXT30150150DDMEXT40150150DDMEXT30150150DDMEXT30150150DDMEXT40150150DDMEXT40150150DDMEXT40150150DDMEXT40150150DDMEXT40150150DDMEXT21150150DDMEXT21150150DDMEXT25150150DDMEXT25150150DDMEXT25150150DDMEXT28150DDMEXT28150 </td <td></td> <td>DDMEXT28</td> <td>150</td>		DDMEXT28	150
DD911SSDDMEXT40200DD911SKDDMEXT11150DD911BKDDMEXT21150DD911WHDDMEXT25200DDMEXT26200DDMEXT27150DDMEXT28150DDMEXT30150DDMEXT40200DD901BKDDMEXT11DD901BKDDMEXT28DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT28150DD606SSDDMEXT11DD606BKDDMEXT25DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT40150DDMEXT40150DDMEXT28150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT30150DDMEXT40 <td></td> <td>DDMEXT30</td> <td>150</td>		DDMEXT30	150
Image: Construct of the second seco		DDMEXT40	150
DD911BKDDMEXT21150DD911WHDDMEXT25200DDMEXT25200DDMEXT28150DDMEXT30150DDMEXT40200DD901BKDDMEXT40200DD901BKDDMEXT21150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DD6065SDDMEXT11DD6066BKDDMEXT25DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT40200DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT30150DDMEXT4015		DDMEXT40	200
DD911WHDDMEXT25150DDMEXT25200DDMEXT28150DDMEXT30150DDMEXT40200DD901BKDDMEXT40DD901BKDDMEXT11DDMEXT21150DDMEXT28150DDMEXT28150DDMEXT30150DDMEXT28150DDMEXT30150DD6065SDDMEXT11DD606BKDDMEXT25DDMEXT28150DDMEXT28150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT40200DDS22BKDDMEXT21DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT40150DDMEXT40150DDMEXT21150DDMEXT21150DDMEXT21150DDMEXT21150DDMEXT21150DDMEXT23150DDMEXT24150DDMEXT25150DDMEXT28150	DD911SS	DDMEXT11	150
Image: Definition of the sector of the sec	DD911BK	DDMEXT21	150
DDMEXT28         150           DDMEXT30         150           DDMEXT30         150           DDMEXT40         150           DDMEXT40         200           DD901BK         DDMEXT40         200           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT21         150           DDMEXT28         150           DDMEXT30         150           DD606SS         DDMEXT21         150           DDMEXT25         150           DDMEXT28         150           DDMEXT28         150           DDMEXT28         150           DDMEXT28         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT30         150           DDMEXT30         150           DDMEXT30         150           DDMEXT30         150           DDMEXT30         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150	DD911WH	DDMEXT25	150
DDMEXT30150DDMEXT40150DDMEXT40200DD901BKDDMEXT40DDMEXT21150DDMEXT21150DDMEXT28150DDMEXT30150DD606SSDDMEXT21DD606BKDDMEXT25DDMEXT25150DDMEXT26200DDMEXT27150DDMEXT28150DDMEXT28150DDMEXT28150DDMEXT30150DDMEXT40200DD522BKDDMEXT21150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT30150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT40150DDMEXT21150DDMEXT25150DDMEXT28150		DDMEXT25	200
DDMEXT40150DD901BKDDMEXT40200DD901BKDDMEXT11150DDMEXT21150DDMEXT28150DDMEXT30150DD606SSDDMEXT11150DD606BKDDMEXT25150DDMEXT25200DDMEXT28150DDMEXT28150DDMEXT25200DDMEXT25200DDMEXT28150DDMEXT30150DDMEXT40150DDMEXT40150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT30150DDMEXT40150DDMEXT30150DDMEXT40150DDMEXT30150DDMEXT40150 <td></td> <td>DDMEXT28</td> <td>150</td>		DDMEXT28	150
DD901BK       DDMEXT40       200         DD901BK       DDMEXT11       150         DDMEXT21       150         DDMEXT28       150         DDMEXT30       150         DD6065S       DDMEXT11       150         DD6066BK       DDMEXT25       150         DDMEXT25       150       150         DDMEXT25       150       150         DDMEXT28       150       150         DDMEXT40       150       150         DDMEXT28       150       150         DDMEXT28       150       150         DDMEXT30       150       150         DDMEXT30       150       150         DDMEXT40       150       150         DDMEXT40       150       150         DDMEXT30       150       150         DDMEXT40       150       150         DDMEXT40       150       150         DDMEXT30       150       150         DDMEXT21       150 <td></td> <td>DDMEXT30</td> <td>150</td>		DDMEXT30	150
DD901BK         DDMEXT11         150           DDMEXT21         150           DDMEXT28         150           DDMEXT30         150           DD6065S         DDMEXT11         150           DD606BK         DDMEXT25         150           DDMEXT25         150         150           DDMEXT25         150         150           DDMEXT28         150         150           DDMEXT25         150         150           DDMEXT28         150         150           DDMEXT28         150         150           DDMEXT28         150         150           DDMEXT40         150         150           DDMEXT30         150         150           DDMEXT30         150         150           DDMEXT30         150         150           DDMEXT30         150         150           DDMEXT40         150         150           DDMEXT21         150         150           DDMEXT21         150         150           DDMEXT21         150         150           DDMEXT25         150         150           DDMEXT28         150         150 <tr< td=""><td></td><td>DDMEXT40</td><td>150</td></tr<>		DDMEXT40	150
DDMEXT21         150           DDMEXT28         150           DDMEXT30         150           DD6065S         DDMEXT11         150           DD606BK         DDMEXT25         150           DDMEXT25         200         150           DDMEXT25         150         150           DDMEXT28         150         150           DDMEXT28         150         150           DDMEXT28         150         150           DDMEXT28         150         150           DDMEXT40         150         150           DDMEXT40         150         150           DDMEXT28         150         150           DDMEXT28         150         150           DDMEXT28         150         150           DDMEXT30         150         150           DDMEXT30         150         150           DDMEXT40         150         150           DD925CO         DDMEXT11         150           DDMEXT21         150         150           DDMEXT25         150         150           DDMEXT28         150         150		DDMEXT40	200
DDMEXT28         150           DDMEXT30         150           DD606SS         DDMEXT11         150           DD606BK         DDMEXT21         150           DDMEXT25         150           DDMEXT25         200           DDMEXT25         200           DDMEXT28         150           DDMEXT30         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT28         150           DDMEXT40         200           DDMEXT40         150           DDMEXT40         150           DDMEXT30         150           DDMEXT30         150           DDMEXT30         150           DDMEXT30         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT21         150           DDMEXT25         150           DDMEXT25         150           DDMEXT28         150	DD901BK	DDMEXT11	150
DDMEXT30         150           DD606SS         DDMEXT11         150           DD606BK         DDMEXT21         150           DDMEXT25         150           DDMEXT25         200           DDMEXT25         200           DDMEXT25         200           DDMEXT25         200           DDMEXT28         150           DDMEXT30         150           DDMEXT40         200           DDMEXT40         200           DD522BK         DDMEXT21         150           DDMEXT30         150           DDMEXT30         150           DDMEXT30         150           DDMEXT30         150           DDMEXT30         150           DDMEXT40         150           DDMEXT30         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT21         150           DDMEXT21         150           DDMEXT25         150           DDMEXT28         150		DDMEXT21	150
DD606SS         DDMEXT11         150           DD606BK         DDMEXT21         150           DDMEXT25         150           DDMEXT25         200           DDMEXT25         200           DDMEXT25         150           DDMEXT25         200           DDMEXT25         200           DDMEXT28         150           DDMEXT30         150           DDMEXT40         200           DDMEXT40         200           DDMEXT40         200           DDMEXT40         150           DDMEXT28         150           DDMEXT28         150           DDMEXT29         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT21         150           DDMEXT21         150           DDMEXT25         150           DDMEXT28         150		DDMEXT28	150
DD606BK         DDMEXT21         150           DDMEXT25         150           DDMEXT25         200           DDMEXT25         200           DDMEXT25         200           DDMEXT25         200           DDMEXT25         200           DDMEXT26         150           DDMEXT30         150           DDMEXT40         200           DDMEXT40         200           DDMEXT40         200           DDMEXT40         150           DDMEXT28         150           DDMEXT28         150           DDMEXT30         150           DDMEXT40         150           DDMEXT30         150           DDMEXT40         150           DDMEXT40         150           DD925CO         DDMEXT11         150           DDMEXT21         150           DDMEXT25         150           DDMEXT28         150		DDMEXT30	150
DDMEXT25         150           DDMEXT25         200           DDMEXT25         200           DDMEXT28         150           DDMEXT30         150           DDMEXT40         150           DDMEXT40         200           DDMEXT40         200           DDMEXT40         150           DDMEXT40         200           DDMEXT40         200           DDMEXT40         200           DDMEXT40         200           DDMEXT40         150           DDMEXT28         150           DDMEXT30         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT21         150           DDMEXT21         150           DDMEXT25         150           DDMEXT28         150	DD606SS	DDMEXT11	150
DDMEXT25         200           DDMEXT28         150           DDMEXT30         150           DDMEXT40         150           DDMEXT40         200           DDMEXT21         150           DDMEXT30         150           DDMEXT40         150           DDMEXT21         150           DDMEXT25         150           DDMEXT28         150	DD606BK	DDMEXT21	150
DDMEXT28         150           DDMEXT30         150           DDMEXT40         150           DDMEXT40         200           DDMEXT40         200           DD522BK         DDMEXT21         150           DDMEXT28         150         150           DDMEXT28         150         150           DDMEXT30         150         150           DDMEXT40         150         150           DDMEXT40         150         150           DD925CO         DDMEXT11         150           DDMEXT21         150         150           DDMEXT25         150         150		DDMEXT25	150
DDMEXT30         150           DDMEXT40         150           DDMEXT40         200           DDMEXT40         200           DD522BK         DDMEXT21         150           DDMEXT28         150           DDMEXT30         150           DDMEXT30         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DD925CO         DDMEXT11         150           DDMEXT25         150           DDMEXT28         150		DDMEXT25	200
DDMEXT40         150           DDMEXT40         200           DD522BK         DDMEXT21         150           DDMEXT28         150         150           DDMEXT30         150         150           DDMEXT40         150         150           DDMEXT30         150         150           DDMEXT40         150         150           DDMEXT40         150         150           DDMEXT11         150         150           DDMEXT25         150         150           DDMEXT28         150         150		DDMEXT28	150
DDMEXT40         200           DD522BK         DDMEXT21         150           DDMEXT28         150           DDMEXT30         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT40         150           DDMEXT11         150           DDMEXT25         150           DDMEXT28         150		DDMEXT30	150
DD522BK         DDMEXT21         150           DDMEXT28         150           DDMEXT28         150           DDMEXT30         150           DDMEXT40         150           DD925CO         DDMEXT11         150           DDMEXT21         150         150           DDMEXT25         150         150           DDMEXT28         150         150		DDMEXT40	150
DDMEXT28         150           DDMEXT30         150           DDMEXT40         150           DD925CO         DDMEXT11         150           DDMEXT21         150           DDMEXT25         150           DDMEXT28         150		DDMEXT40	200
DDMEXT30         150           DDMEXT40         150           DD925CO         DDMEXT11         150           DDMEXT21         150           DDMEXT25         150           DDMEXT28         150	DD522BK	DDMEXT21	150
DDMEXT40         150           DD925CO         DDMEXT11         150           DDMEXT21         150           DDMEXT25         150           DDMEXT28         150		DDMEXT28	150
DD925CO         DDMEXT11         150           DDMEXT21         150           DDMEXT25         150           DDMEXT28         150		DDMEXT30	150
DDMEXT21         150           DDMEXT25         150           DDMEXT28         150		DDMEXT40	150
DDMEXT21         150           DDMEXT25         150           DDMEXT28         150	DD925CO	DDMEXT11	150
DDMEXT28 150			150
DDMEXT28 150			
DDMFXT30 150		DDMEXT30	150

ENERGY CLASS	EXTRACTION RATE [m³/h]	FLUID DYNAMIC EFFICIENCY	LIGHT EFFICIENCY	GREASE ABSORPTION	NOISE LEVEL dB[A]	ANNUAL CONSUMPTION [kWh/yr]	
е		$\overline{\mathbf{x}}$	Q		<b>\$</b> (( <b>b</b> )		
В	791	A	F	E	58	66	
В	736	A	F	E	45	59	
С	807	В	F	F	41	107	
В	938	В	F	F	44	100	
С	559	С	F	E	59	67	
С	738	В	F	E	48	99	
A	1310	A	F	F	55	121	
A	1405	A	F	F	57	125	
В	757	A	E	E	61	60	
В	682	А	E	E	51	61	
С	753	В	E	F	60	109	
В	938	В	E	F	62	102	
С	530	С	E	E	61	61	$\sim$
С	731	С	E	E	58	90	00
A	1240	А	E	F	58	116	$\tilde{\prec}$
A	1328	A	E	F	60	119	COOKING
В	668	В	E	E	61	57	
В	633	В	F	E	51	55	
С	478	С	F	E	70	58	
В	639	С	E	E	58	77	114
В	636	В	-	E	69	54	
A	595	В	-	E	66	47	$\sim$
С	622	С	-	E	70	101	115
В	825	В	-	E	63	91	
В	478	С	-	E	67	52	
С	577	С	-	E	68	83	
В	1110	А	-	E	64	130	
В	1210	A	-	E	66	139	$\leq$
							0
A	618	A	-	С	66	48	ГО
С	493	D	-	С	70	60	R
В	597	С	-	D	68	73	PH
В	970	A	-	F	63	147	OTOR PERFORMANCE
A	690	A	С	С	61	51	A O F
			C	С		49	Ĩ
A C	660	A C	C	C	51		$\geq$
	775				60	109	N
C	525	DB	C C	C C	61	66	
В	665	В	C	C	58	75	

N
11



PRODUCT CODE	MOTOR CHOICE	DUCTING OUTLET SIZE [mm]
DD903BK	DDMEXT21	150
	DDMEXT28	150
	DDMEXT30	150
CEILING HOODS		
CE1101	DDMEXT21	150
	DDMEXT25	150
	DDMEXT25	200
	DDMEXT30	150
	DDMEXT40	150
	DDMEXT40	200
CE000CC 0. CE00014///		450
CE902SS & CE902WH	DDMEXT21	150
	DDMEXT25	150
	DDMEXT25	200
	DDMEXT30	150
	DDMEXT40	150
	DDMEXT40	200
CE920WH	DDMEXT21	150
	DDMEXT30	150
	DDMEXT40	150
	DDMEXT40	200

ENERGY CLASS	EXTRACTION RATE [m³/h]	FLUID DYNAMIC EFFICIENCY	LIGHT EFFICIENCY	GREASE ABSORPTION	NOISE LEVEL dB[A]	ANNUAL CONSUMPTION [kWh/yr]	
е		$\bigotimes$	Q	••••••	<b>(</b> (( <b>()</b> )		
А	600	В	/	С	66	47	
В	484	С	/	С	70	52	
В	582	С	/	D	68	74	
C	725	В	F	F	46	107	
С	869	В	F	F	44	138	
В	938	A	F	F	48	109	
С	773	В	F	F	55	130	
А	1464	A	F	F	69	139	
A+	1543	А	F	F	71	126	
						62	
В	670	В	В	F	44	63	
В	900	В	В	F	42	97	COOKING
В	965	А	В	F	46	99	0
В	790	В	В	F	47	88	$\leq$
A+	1490	А	В	F	67	102	Z
A++	1575	A	В	F	69	89	
В	665	А	А	F	58	55	
С	693	С	А	F	61	84	~
A+	1464	А	А	F	69	98	116
A++	1543	А	А	F	71	85	



# Island Hoods

High quality, highly efficient and intuitive our range of island hoods offer every kind of style to suit your kitchen.

#### POWER AND LIGHTING AT YOUR FINGERTIPS

Power and lighting adjustments at your fingertips with our user-friendly remote control. The handy timer function automatically switches off the extractor after 10 minutes, so you can leave your kitchen knowing any odours will have disappeared when you return - just some of the features from our fabulous island hood range. COOKING II9 ISLAND HOODS

# CERAMICA

The Ceramica island hood with its incredibly eyecatching handmade ceramic body, features exquisite attention to detail and powerful extraction.



CR700



CR700WH



CR700SL

#### PRODUCT CODE

Copper CR700 White CR700WH Silver CR700SL

#### DIMENSIONS

 $\leftrightarrow$  w:690mm

#### PERFORMANCE

e Max. Extraction 550m<sup>3</sup>/h Max. Noise level 65dB[A]

#### FINISH AVAILABLE

Copper White Silver

#### FEATURES

- Handmade ceramic body with stainless steel filter
- Remote control
- 4 Speeds
- 20W LED light
- Auto timer switch-off after 10mins
- Stainless steel washable grease filter
- Recirculation only installation [supplied with washable recirculation kit]

#### OPTIONAL EXTRAS

- Replacement washable recirculation kit [CAP58CF]

Visit caple.co.uk for full range

INSTALLATION - Diagram [p.239]

#### Features

REMOTE CONTROL INCLUDED



# CERAMICA ELLIAS

The Ellias island hood is a beautiful addition to the Ceramica family. The iconic handmade ceramic hood has adopted a distinctive contoured exterior with all the power and efficiency you would expect from Caple extraction.



CR750CO



CR750WH



$\geq$	2	
G	)	

COOKI

#### PRODUCT CODE

Copper	CR750CO
White	CR750WH
Silver	CR750SL

#### DIMENSIONS

w:690mm

#### PERFORMANCE

e Max. Extraction 550m<sup>3</sup>/h Max. Noise level 68dB[A]

#### FINISH AVAILABLE

Copper White Silver

#### FEATURES

- Handmade ceramic body with stainless steel filter
- Remote control
- 4 Speeds
- 20W LED light
- Auto timer switch-off after 10mins
- Stainless steel washable grease filter
- Recirculation only installation [supplied with washable recirculation kit]

#### OPTIONAL EXTRAS

- Replacement washable recirculation kit [CAP58CF]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.239]

#### Features






# ISLAND HOODS

# ZALTO

The Zalto offers iconic styling and exceptional performance. You can choose from a copper, silver or black finish. Whatever your preference, this hood offers stand-out looks whilst integrating perfectly into your kitchen.

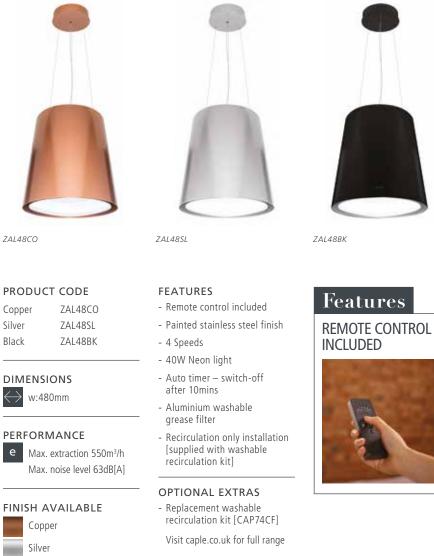

INSTALLATION - Diagram [p.239]

Black

#### **ISLAND HOODS**

#### **ISLAND HOOD**







Plaza

#### PRODUCT CODE

Pi402	Plaza
Oi363	Orbit

#### DIMENSIONS

$\leftrightarrow$	w:400mm	Pi402
$\leftrightarrow$	w:362mm	0i362

#### PERFORMANCE

e Energy Class A Fluid dynamic efficiency A Light efficiency A Grease absorption D Annual Consumption [Pi402] 53kWh/yr [Oi363] 44kWh/yr Max. extraction 730m3/h Max. noise level 64dB[A]

#### Features

#### **REMOTE CONTROL** INCLUDED



#### FINISH AVAILABLE Stainless Steel

#### **FEATURES**

- Remote control included
- 4 Speeds [inc. Boost setting]
- 1 x 4W high intensity LED light
- Auto timer switch-off after 10mins
- Aluminium grease filter
- Required ducting size 150mm
- Recirculation kit available

#### Pi402 OPTIONAL EXTRAS

- Recirculation kit [CAP39CF]
- Visit caple.co.uk for full range

#### Oi362 OPTIONAL EXTRAS

- Recirculation kit [CAP38CF]
- Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.239]
- Venting Kits [p.144]

#### PRODUCT CODE BXi911

#### DIMENSIONS

## w:900mm

#### PERFORMANCE

е Energy Class D Fluid dynamic efficiency D Light efficiency D Grease absorption D Annual Consumption 96kWh/yr Max. extraction 605m3/h Max. noise level 69dB[A]

#### FINISH AVAILABLE

Stainless Steel

#### Venting choices

Ensure you purchase the correct venting for your Caple extractor. For the full range please see p.144-145

#### FEATURES

- Touch controls
- 3 Speeds - 4 x 1.5W high intensity
- LED lights
- Aluminium grease filters - Required ducting
- size 150mm
- Supplied with 2m length of semi-rigid ducting
- Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP61CF] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.239]
- Venting Kits [p.144]

ISLAND HOODS

COOKING

I22

123





#### **ISLAND HOOD**

#### PRODUCT CODE

Zi922

DIMENSIONS

 $\leftrightarrow$  w:900mm

#### PERFORMANCE

e Energy Class B Fluid dynamic efficiency B Light efficiency A Grease absorption D Annual Consumption 54kWh/yr Max. extraction 581m<sup>3</sup>/h Max. noise level 66dB[A]

#### FINISH AVAILABLE

Stainless Steel with a Black Glass front panel

#### FEATURES

- Illuminated LED touch controls front and back
- 3 Speeds
- Large LED light panel
- Aluminium grease filters
- Required ducting size 150mm
- Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP61CF] Visit caple.co.uk for full range


#### INSTALLATION

- Diagram [p.240]
- Venting Kits [p.144]



#### **ISLAND HOODS**





#### PRODUCT CODE CGi921

#### DIMENSIONS

w:900mm h:920-1240mm

#### PERFORMANCE

Energy Class A Fluid dynamic efficiency A Light efficiency C Grease absorption D Annual Consumption 42kWh/yr Max. extraction 617m<sup>3</sup>/h Max. noise level 68dB[A]

#### FINISH AVAILABLE

Stainless Steel with curved Clear Glass

#### FEATURES

- Touch controls
- 3 Speeds
- 4 x 1.5W high intensity LED lights Aluminium grease filters
- Required ducting size 150mm
- Supplied with 2m length of semi-rigid ducting
- Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP61CF] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.240]
- Venting Kits [p.144]

#### PRODUCT CODE

CGi920/RED [Reduced ceiling height]

#### DIMENSIONS



#### PERFORMANCE

Energy Class D
 Fluid dynamic efficiency D
 Light efficiency C
 Grease absorption D
 Annual Consumption
 96kWh/yr
 Max. extraction 608m<sup>3</sup>/h
 Max. noise level 69dB[A]

#### FINISH AVAILABLE

Stainless Steel with curved Clear Glass

#### Venting choices

Ensure you purchase the correct venting for your Caple extractor. For the full range please see p.144-145



#### FEATURES

- Electronic controls
- 3 Speeds- 4 x 1.5W high intensity
- LED lights
- Aluminium grease filters
- Required ducting size 150mm
- Supplied with 2m length of semi-rigid ducting
- Recirculation kit available

#### **OPTIONAL EXTRAS**

Recirculation kit [CAP61CF]
 Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.240]
- Venting Kits [p.144]
- ISLAND HOODS

COOKING

124

125



# Wall Chimney Hoods

Our practical and stylish chimney hoods are sure to make a statement. Multi-functional and great to look at extraction will be a joy when you cook. COOKING 126

WALL CHIMNEY HOODS

# NOVA

Discreet, slimline and powerful, the Nova neatly mounts on the wall keeping a low profile until it is brought to life by the illuminated touch controls. Finished with a delicate stainless steel trim, this hood exceeds every expectation.



#### PRODUCT CODE

NOV800

DIMENSIONS

#### PERFORMANCE

e Energy Class A Fluid Dynamic Efficiency A Light Efficiency A Grease Absorption C Annual Consumption 43kWh/yr Max. extraction 615m<sup>3</sup>/h Max. noise level 60dB[A]

FINISH AVAILABLE Black Glass

#### FEATURES

- 4 Speeds [inc. Boost function]
- Touch control
- Auto timer switch-off after 10mins
- 10.5W white LED strip light
- Aluminium grease filters
- Ducting spigot size 150mm
- Flat channel ducting required [p.144-145]
- Recirculation kit available

#### OPTIONAL EXTRAS


- Recirculation kit [CAP77CF] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.240]
- Venting Kits [p.144]

#### Venting choices

Ensure you purchase the correct venting for your Caple extractor. For the full range please see p.144-145



# TAURI

The clean lines and striking aesthetics of Tauri sets this hood apart from the rest. Featuring a sleek, glass fronted touch control panel and exposed stainless steel filters, it's sure to make a design statement in any kitchen.



#### PRODUCT CODE

TAU760

DIMENSIONS

#### PERFORMANCE

e Energy Class A+ Fluid Dynamic Efficiency A Light Efficiency A Grease Absorption C Annual Consumption 46kWh/yr Max. extraction 777m<sup>3</sup>/h Max. noise level 61dB[A]

#### FINISH AVAILABLE

Black Glass with Glass

#### FEATURES

- 4 Speeds [inc. Boost function]
- Touch control
- Auto timer switch-off after 10mins
- 10.5W white LED strip light
- Polished stainless steel grease filters
- Ducting spigot size 150mm 🕢
- Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP79CF] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.240]
- Venting Kits [p.144]

#### Venting choices

Ensure you purchase the correct venting for your Caple extractor. For the full range please see p.144-145



COOKING

128

129

# MOTUS TOUCH

Minimal, sleek styling and advanced engineering combine effortlessly to make an exceptional extractor. It slides smoothly into action, operated via subtle, elegant electronic touch controls.

#### PRODUCT CODE MOT912

101912

## DIMENSIONS

#### PERFORMANCE

e Energy Class A+ Fluid Dynamic Efficiency A Light Efficiency B Grease Absorption D Annual Consumption 46kWh/yr Max. extraction 757m<sup>3</sup>/h Max. noise level 62dB[A]

#### FINISH AVAILABLE

Black Glass with Stainless Steel

#### FEATURES

- Supplied with optional stainless steel flue

- Full touch controls with electronic display
- Mechanical automatic opening [dependent on speed setting]
- Perimetrical extraction for reduced noise and increased pressure resulting in improved motor performance
- 4 Speeds [inc. Boost setting]
- 10W LED strip light
- Auto timer switch-off after 10mins
- Aluminium washable grease filters
- Required ducting size 150mm 🕢
- Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP52CF]
- Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.241]
- Venting Kits [p.144]



#### **ELEGANT EFFICIENCY**

Your Motus hood glides into action with touch control operation and an electric blue display.



**STAGE 1** The whisper quiet perimetric extraction system removes even the subtlest odours.



**STAGE 2** The black glass front rises further to reveal the aluminium filters as the extraction level increases.



**STAGE 3** It glides effortlessly into position to remove even those hard to shift cooking odours.



STAGE 4 Maximum extraction when you need it most. Still operating below an impressive 62dB[A].

# OMNIS

The ultra-modern, sleek black glass and slanted edges is ideal if you want to create a minimal and stylish look.



#### PRODUCT CODE

OM900 OM600

#### DIMENSIONS

w:900mm
 w:600mm
 OM600

#### PERFORMANCE

e Energy Class C Fluid Dynamic Efficiency D Light Efficiency B Grease Absorption C [OM600] B [OM900] Annual Consumption 51kWh/yr Max. extraction 456m3/h Max. noise level 62dB[A]

#### FINISH AVAILABLE

Black glass

#### FEATURES

- Illuminated LED touch controls
- 3 Speeds
- 2 x 1.5W LED lights
- Aluminium grease filters
- Ducting spigot size 150mm
- Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP61CF]
- Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.241]
- Venting Kits [p.144]

#### Venting choices

N

Ensure you purchase the correct venting for your Caple extractor. For the full range please see p.144-145

# WALL CHIMNEY HOODS

COOKING

130

131

# SPIRIT

Choose from smooth black glass or go for stainless steel with smoked glass. What's more, this hood can also work in recirculation mode.





SP912BK

SP912SS

SP912BK

SP612SS

SP612BK

#### PRODUCT CODE

Stainless Steel	SP912SS
Black Glass	SP912BK
Stainless Steel	SP612SS
Black Glass	SP612BK

#### DIMENSIONS

$\geq$	w:900mm
	w:900mm
	w:600mm
	w:600mm

#### PERFORMANCE

Energy Class A Fluid Dynamic Efficiency A Light Efficiency C Grease Absorption D Annual Consumption 42kWh/yr Max. extraction 612m<sup>3</sup>/h Max. noise level 66dB[A]

#### FINISH AVAILABLE

Stainless Steel with glass panels Black with black glass panels

#### FEATURES

SP612BK

SP61255

- Touch controls
- 3 Speeds- 2 x 1.5W high intensity
- LED lights
- Aluminium grease filters
- Supplied with 2m length of semi-rigid ducting
- Required ducting size 150mm
- Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP61CF]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.241]
- Venting Kits [p.144]

#### **Features**

# REMOTE CONTROL INCLUDED



#### LUCIS WALL CHIMNEY HOOD

#### ZODIAC WALL CHIMNEY HOODS



#### PRODUCT CODE LUC600

#### DIMENSIONS



#### PERFORMANCE

е

Max. extraction 500m3/h Max. noise level 55dB[A]

#### FINISH AVAILABLE

Black and White Glass with Stainless Steel

#### FEATURES

- Supplied with optional stainless steel flue [not shown]
- Rotary control with electronic display
- Perimetrical extraction for reduced noise and increased pressure resulting in improved motor performance
- 4 Speeds
- 3 x 1W LED lights
- Auto timer switch-off after 10mins - Aluminium washable
- grease filter - Required ducting 🔎
- size 125mm - Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP53CF]
- Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.242]
- Venting Kits [p.144]

#### Venting choices

Ensure you purchase the correct venting for your Caple extractor. For the full range please see p.144-145



ZC922 ZC622 PRODUCT CODE FINISH AVAILABLE ZC922 Stainless Steel with black ZC622 glass panel **FEATURES** DIMENSIONS - Illuminated LED touch control w:900mm ZC922 - 3 Speeds w:600mm ZC622 - Large LED light panel - Aluminium grease filters ZC922 PERFORMANCE - Required ducting e Energy Class B m size 150mm Fluid Dynamic Efficiency A - Recirculation kit available

#### **OPTIONAL EXTRAS**

- Recirculation kit [CAP61CF] Visit caple.co.uk for full range

- 132
  - 133

COOKING

#### INSTALLATION

- Diagram [p.241]
- Venting Kits [p.144]

ZC622 PERFORMANCE Energy Class B Fluid Dynamic Efficiency B

Light Efficiency A Grease Absorption D Annual Consumption 54kWh/yr Max. extraction 570m<sup>3</sup>/h Max. noise level 66dB[A]



Light Efficiency A Grease Absorption D

е

Annual Consumption 45kWh/yr Max. extraction 587m3/h Max. noise level 66dB[A]







# Classic Hoods

From bold statement pieces to discreet integrated models. Whatever you're looking for, we can help.

You'll find a near-endless choice of styles and functionality in the Classic range. Whichever you opt for, you can guarantee it will perform to the highest standards and keep your kitchen free from odours and grease, while powerful halogen or LED lights illuminate the cooking zone below. COOKING 134 IS5 CLASSIC HOODS





FGC920

FGC720

FGC620

FGC920

#### PRODUCT CODE

FGC920 FGC720 FGC620

#### DIMENSIONS

$\leftrightarrow$	w:895mm
	w:695mm
	w:595mm



FGC720

#### PERFORMANCE

e Energy Class D Fluid Dynamic Efficiency D Light Efficiency B Grease Absorption C Annual Consumption 60kWh/yr Max. extraction 580m<sup>3</sup>/h Max. noise level 68dB[A]

#### FINISH AVAILABLE

Stainless Steel with flat clear glass

#### FEATURES

- Push button controls
- 3 Speeds
- 2 x 1.5W high intensity LED lights
- Aluminium grease filter
  Required ducting ()
- size 150mm
- Supplied with 2m length of semi-rigid ducting
- Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP61CF]
- Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.242]
- Venting Kits [p.144]



FGC620

#### Features

#### **FUNCTION & POWER**

This model has a powerful maximum extraction rate of 580m<sup>3</sup>/h, perfect if you're looking for style, functionality and raw power.







CGC71155



CGC611SS





CGC710BK



Features

**SPLASHBACK** 

This unique splashback has been

designed to fit perfectly with the curved canopy of the Caple CGC

hoods and is available in black,

pewter or stainless steel -

see p148-149.

CGC611BK

#### PRODUCT CODE

Stainless Steel	CGC911SS
Black	CGC911BK
Stainless Steel	CGC711SS
Black	CGC710BK
Stainless Steel	CGC610SS
Black	CGC610BK

#### DIMENSIONS

 $\leftarrow$ 

$\rightarrow$	w:895mm	CGC9110SS
	w:895mm	CGC911BK
	w:695mm	CGC711SS
	w:695mm	CGC710BK
	w:595mm	CGC610SS
	w:595mm	CGC610BK

#### PERFORMANCE

CGC911, CGC711 and CGC611

e Energy Class C Fluid Dynamic Efficiency D Light Efficiency A Grease Absorption C Annual Consumption 52kWh/yr Max. extraction 456m3/h Max. noise level 56dB[A]

#### CGC710

e Energy Class D Fluid Dynamic Efficiency F Light Efficiency C Grease Absorption G Annual Consumption 59kWh/yr Max. extraction 436m<sup>3</sup>/h Max. noise level 60dB[A]



clear glass

- 3 Speeds
- LED lights
- Required ducting
- Supplied with 2m length
- Recirculation kit available

#### OPTIONAL EXTRAS

- CGC710
- Recirculation kit [CAP75CF] -CGC611, CGC711, CGC911

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.242]
- Venting Kits [p.144]

# COOKING

136

137

CLASSIC HOODS

#### Venting choices

Ensure you purchase the correct venting for your Caple extractor. For the full range please see p.144-145



FINISH AVAILABLE Stainless Steel with

Black with curved

#### FEATURES

- Push button controls

#### - 2 x 1.5W high intensity

- Aluminium grease filters
- size 150mm

of semi-rigid ducting

- Recirculation kit [CAP61CF] -



PRODUCT CODE

BXC911 BXC611

#### DIMENSIONS

w:900mm BXC911 w:600mm BXC611

#### PERFORMANCE

#### BXC911

 $\leftrightarrow$ 

Energy Class C
 Fluid Dynamic Efficiency D
 Light Efficiency A
 Grease Absorption D
 Annual Consumption
 86kWh/yr
 Max. extraction 571m<sup>3</sup>/h
 Max. noise level 76dB[A]

#### BXC611

- e Energy Class D Fluid Dynamic Efficiency F Light Efficiency B Grease Absorption C Annual Consumption 61kWh/yr
  - Max. extraction 448m<sup>3</sup>/h Max. noise level 59dB[A]

#### FINISH AVAILABLE

Stainless Steel

- FEATURES
- Touch controls
- 3 Speeds
- 2 x 1.5W high intensity LED lights
- Aluminium grease filters
- Required ducting size 150mm
- Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP61CF] Visit caple.co.uk for full range

#### INSTALLATION

#### - Diagram [p.243]

- Venting Kits [p.144]

#### Features

#### FUNCTION & POWER

The seamlessly crafted stainless steel features easy-to-use touch controls to create a stylish focal point in your kitchen.

11.224



BXC911



BXC611





ССН700



CCH100 CCH900SS

CCH900BK

CCH600SS

CCH600BK

CCH700



CCH900SS



ССН600ВК

ССН900ВК

#### PRODUCT CODE

Stainless	Steel
Stainless	Steel
Black	
Stainless	Steel
Stainless Stainless	5100.

#### DIMENSIONS

 w:1000mm
 CCH100

 w:900mm
 CCH900SS

 w:900mm
 CCH900BK

 w:700mm
 CCH700

 w:600mm
 CCH600SS

 w:600mm
 CCH600BK

#### PERFORMANCE

e Energy Class D Fluid Dynamic Efficiency E Light Efficiency G Grease Absorption - CCH100 & CCH900 - D - CCH600 & CCH700 - C Annual Consumption 74kWh/yr Max. extraction 299m<sup>3</sup>/h Max. noise level 63dB[A]

#### FINISH AVAILABLE



#### FEATURES - Push button controls

- 3 Speeds
- 2 x 28W eco halogen lights
- Aluminium grease filters
- Required ducting size 150mm
- Supplied with 2m length of semi-rigid ducting
- Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP60CF] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.243]
- Venting Kits [p.144]

## Features

#### FUNCTION & POWER

Simple in design, efficient in performance with a choice of 2 finishes to suit your kitchen.



# 138 139

COOKING

#### **INTEGRATED HOOD**

#### **STORM BUILT-UNDER HOODS**





ST523

#### PRODUCT CODE

ST853 ST523

#### DIMENSIONS

w:850mm ST853 w:520mm ST523

#### PERFORMANCE

#### ST853

Fluid Dynamic Efficiency A Light Efficiency B Grease Absorption A Annual Consumption 49kWh/yr Max. extraction 745m3/h Max. noise level 63dB[A]

#### ST523

Energy Class A

Fluid Dynamic Efficiency A Light Efficiency A Grease Absorption A Annual Consumption 47kWh/yr Max. extraction 680m<sup>3</sup>/h Max. noise level 63dB[A]

#### FINISH AVAILABLE

Stainless Steel

#### FEATURES

- Electronic controls
- 4 Speeds [inc. Boost]
- Auto timer
- 6W LED strip light
- Stainless steel grease filters
- Required ducting size 150mm
- Recirculation kit available

#### **ST853 OPTIONAL EXTRAS**

- Recirculation kit [CAP65CF - 2 required] Visit caple.co.uk for full range

#### **ST523 OPTIONAL EXTRAS**

- Recirculation kit [CAP54CF - 2 required] Visit caple.co.uk for full range

#### INSTALLATION

- ST853 Diagram [p.243]
- ST523 Diagram [p.244]
- Venting Kits [p.144]



#### PRODUCT CODE INCH

#### DIMENSIONS w:600mm

#### PERFORMANCE

Energy Class C е Fluid Dynamic Efficiency E Light Efficiency B Grease Absorption D Annual Consumption 37kWh/yr Max. extraction 285m3/h Max. noise level 52dB[A]

#### FINISH AVAILABLE

Silver Grey

#### Venting choices

Ensure you purchase the correct venting for your Caple extractor. For the full range please see p.144-145





#### **FEATURES**

- Slider control - 3 Speeds
- 2 x 2W LED lights
- Aluminium grease filters
- Ducting spigot size 150mm
- Recirculation kit available

#### **OPTIONAL EXTRAS** - Recirculation kit [CAP73CF]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.243]
- Venting Kits [p.144]

C

## е Energy Class A



#### TOUCH CONTROL BUILT-UNDER HOODS

#### PRODUCT CODE

TBU850 TBU520

#### FINISH AVAILABLE

Stainless Steel

#### DIMENSIONS

w:850mm TBU850 w:520mm TBU520

#### PERFORMANCE TBU850

- TBU85
  - Energy Class A+ Fluid Dynamic Efficiency A Light Efficiency B Grease Absorption A Annual Consumption 46kWh/yr Max. extraction 772m<sup>3</sup>/h Max. noise level 63dB[A]

#### TBU520

e Energy Class A Fluid Dynamic Efficiency A Light Efficiency A Grease Absorption A Annual Consumption 47kWh/yr Max. extraction 680m<sup>3</sup>/h Max. noise level 63dB[A]

- FEATURES
- Fold away glass panel with illuminated touch control
- 4 Speeds [inc. Boost function]
  Auto timer switch-off after 10mins
- 10.5W LED strip light [TBU850]
- 6.5W white LED strip light [TBU520]
- Aluminium grease filter
- Ducting spigot size 150mm
  Recirculation kit available

#### OPTIONAL EXTRAS

- TBU850 Recirculation kit [CAP42CF - 2 required]
- TBU520 Recirculation kit [CAP78CF]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.243]
- Venting Kits [p.144]





I40 I4I CLASSIC HOODS



#### **BUILT-UNDER HOOD**



#### PRODUCT CODE

BU521

#### DIMENSIONS

#### $\leftrightarrow$ w:520mm

#### PERFORMANCE

e Energy Class B Fluid Dynamic Efficiency B Light Efficiency A Grease Absorption B Annual Consumption 58kWh/yr Max. extraction 604m³/h Max. noise level 70dB[A]

#### FINISH AVAILABLE

Stainless Steel

#### FEATURES

- Push button controls
- 3 Speeds
- 2 x 2.1w high intensity LED light
- Aluminium grease filter
- Required ducting size 150mm
- Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP66CF] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.244]
- Venting Kits [p.144]

#### **BUILT-UNDER TELESCOPIC HOOD**



#### PRODUCT CODE

TSCH600



#### PERFORMANCE

e Energy Class D Fluid Dynamic Efficiency E Light Efficiency G Grease Absorption D Annual Consumption 75kWh/yr Max. extraction 289m³/h Max. noise level 62dB[A]

#### FINISH AVAILABLE

Stainless Steel fascia with Silver Grey body

#### FEATURES

- Dual switch controls
- 2 Speeds
- 2 x 28W eco halogen lights
- Aluminium grease filter
- Required ducting size 120mm
- Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP60CF] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.244]
- Venting Kits [p.144]

#### **BUILT-UNDER HOOD**

#### CONVENTIONAL HOOD





#### PRODUCT CODE BUCH

#### DIMENSIONS

 $\leftrightarrow$  w:520mm

#### PERFORMANCE

Energy Class C
 Fluid Dynamic Efficiency E
 Light Efficiency B
 Grease Absorption D
 Annual Consumption
 37kWh/yr
 Max. extraction 286m3/h
 Max. noise level 52dB[A]

#### FEATURES

- Slider controls
- 3 Speeds
- 2 x 2W LED lights
- Aluminium grease filters
- Required ducting size 150mm
- Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP73CF] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.244]
- Venting Kits [p.144]

#### PRODUCT CODE FSCHSS7

#### DIMENSIONS

 $\leftrightarrow$  w:600mm

#### PERFORMANCE

e Energy Class D Fluid Dynamic Efficiency F Light Efficiency G Grease Absorption E Annual Consumption 74kWh/yr Max. extraction 194m<sup>3</sup>/h Max. noise level 64dB[A]

#### FINISH AVAILABLE

Stainless Steel

Stanness Steel

# COOKING

142

143

## - 3 Speeds- 1 x 28W eco halogen light

- Aluminium grease filters

- Push button controls

**FEATURES** 

- Required ducting size 120mm
- Recirculation kit available

#### OPTIONAL EXTRAS

- Recirculation kit [CAP62CF] Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.244]
- Venting Kits [p.144]

## FINISH AVAILABLE Stainless Steel



Venting choices

Ensure you purchase the correct venting for your Caple extractor. For the full range please see p.144-145



# VENTING

To ensure you get the most out of your extraction we have the perfect venting solution to suit your needs.



100MM VENTING KIT [CODE 202W] 1 Metre flexible venting kit



100MM VENTING KIT [CODE 212W] 2 Metre venting kit



**125MM VENTING KIT** [CODE 202-5W] 1 Metre flexible venting kit



125MM VENTING KIT [CODE 227W] 3 Metre venting kit



**150MM VENTING KIT** [CODE 202-6W] 1 Metre flexible venting kit

#### CHOOSING THE RIGHT VENTING

To ensure you have the correct venting for your chosen hood, please refer to the hood specification where the required diameter kit is listed.

#### **EXTERNAL MOTORS**

Due to the power and fitment of Caple external motors [DDMEXT11, DDMEXT21, DDMEXT25, DDMEXT28, DDMEXT30 and DDMEXT40, see p.112-113] you must use rigid ducting.

# HIGH EFFICIENCY VENTING



# **125MM ELBOW BEND**

# [CODE 550GL]

- Suitable for 125mm flat channel ducting [204 x 60mm] Can be used with 227W and 515W



**150MM ELBOW BEND** [CODE 950GL] - Suitable for 150mm flat

channel ducting [220 x 90mm] Can be used with 2653W, 2655W and 915W



**150MM VENTING KIT** [CODE 2653WGL] - For hoods with extraction

- over 500m3/h
- 3 metre venting kit




**150MM VENTING KIT** [CODE 2655WGL] - Suitable for use with

- 3 metre ridged venting kit

downdraft hoods

Due to the profile of a duct bend, air travelling through it can become turbulent causing increased resistance and noise. As a consequence the cooker hood will need to work harder in order to meet the required airflow rates, therefore consuming more energy. This high efficiency 90° bend has been designed to allow a uniform flow of air through the section of ducting, reducing the resistance by up to 60% and lowering the air speed. All of which results in a quieter and more efficient system.

- Smoothly channels air through the duct bend in a uniform flow
- Reduced duct resistance by up to 60% to lower the systems pressure drop and overall energy usage
- Reduced air speed through the bend to reduce noise
- Performance has been tested by the Building Research Establishment [BRE]

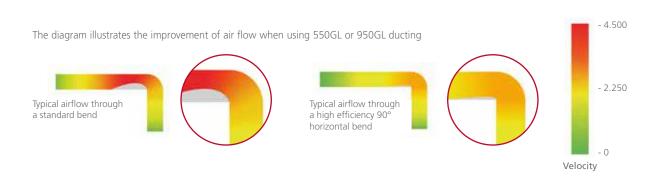

VENTING

COOKING

144

145



# Splashbacks

The perfect finishing touch.

COOKING 146 SPLASHBACKS

# **CURVED TOUGHENED GLASS SPLASHBACK**

1222



# PRODUCT CODE

TSB1000\*\* TSB900\*\* TSB600\*\*

[Available in Black and pewter only]

# DIMENSIONS

$\geq$	TSB1000	w:1000mm
	TSB900	w:900mm
	TSB600	w:600mm
		h:750mm*

# FEATURES

- 10 Colours available
- Will not mark with fingerprints - Adhesive backed for quick and easy DIY installation [no unsightly fixing screws]
- Toughened glass
- Conforms to BS EN12150:1 \_ British Safety Standards
- Hygienic
- Opaque colour finish
- Can be applied to all flat non-porous, clean surfaces



# PRODUCT CODE

TSBCURVE900\*\* TSBCURVE700\*\* TSBCURVE600\*\*

# DIMENSIONS

TSBCURVE900\*\* w:895mm [Fits CGC911 pg.137] TSBCURVE700\*\* w:695mm [Fits CGC711 pg.137] TSBCURVE600\*\* w:595mm

# h:750mm\*

d:5mm\*

[Fits CGC611 pg.137]



d:5mm\*

Dove Grey Olive Green

\*Applicable to all widths

\*\*For chosen colour option, replace '\*\*'

with colour code - see swatches above.

BI - Biscuit	BK - Black	FU - Fuchsia





# \*Applicable to all widths

\*\*For chosen colour option, replace '\*\*' with colour code - see swatches above.

# Features

# SAFE & EASY TO INSTALL

All Caple glass splashbacks are adhesive-backed. This stops them shattering and allows fitting to any clean, non-porous surface. All our glass products meet British Safety Standards and are made from toughened glass.





- Toughened glass
- Conforms to BS EN12150:1 British Safety Standards
- Hygienic
- Opaque colour finish
- Can be applied to all flat

non-porous, clean surfaces

PT - Pewter

BK - Black

Colours are only a guide. Glass sample packs are available to order [code TSB/SAMP10]

# STAINLESS STEEL SPLASHBACK

# CURVED STAINLESS STEEL SPLASHBACK





# PRODUCT CODE

CSB1006 CSB906 CSB706 CSB606

# DIMENSIONS

$\leftrightarrow$	CSB1006	w:1000mm
	CSB906	w:900mm
	CSB706	w:700mm
	CSB606	w:600mm
		h:750mm*
		d:10.5mm*



Stainless Steel

\*Applicable to all widths

PRODUCT CODE CSBCURVE905 CSBCURVE705 CSBCURVE605

# DIMENSIONS

CSBCURVE905 w:900mm
 [Fits CGC911 pg.137]
 CSBCURVE705 w:700mm
 [Fits CGC711 pg.137]
 CSBCURVE605 w:600mm
 h:750mm\*
 d:10.5mm\*
 [Fits CGC611 pg.137]



Stainless Steel

\*Applicable to all widths

COOKING



e

# COOLING

Professional Refrigeration	156
Freestanding Refrigeration	158
Integrated Refrigeration	165
Wine Cabinets	177





# Refrigeration

Chill it, freeze it, love it.

Whether you want a discreet space-saving under-counter fridge or something more spacious, you'll find it right here.



# Whatever you want, that's cool.

We've one for every kind of kitchen, big or small. Different colours, different finishes, different sizes and plenty of functionality.

# PROFESSIONAL

The CAFF60 has a massive 820L capacity in six compartments, as well as three separate temperature zones - one freezer and two fridge zones. Each of which can be set to a different temperature. It can be built-in or used as a freestanding appliance.



# FRENCH DOOR

This large, freestanding fridge freezer has two doors on the top for the fridge and drawers underneath for the freezer, great for storing large items.



# SIDE-BY-SIDE

Big on looks and big on capacity. Available in black or stainless steel some side-by-side fridge freezers can also be plumbed in for a constant supply of cold filtered water and ice.



# 70/30 FREESTANDING

This is the perfect option when space is key. This stacked refrigeration solution allows you to keep that extra floor space with the impressive styling of freestanding refrigeration.



# INTEGRATED

Our fridge freezer combinations or compact under-counter and in-column products can be hidden behind furniture doors. Choose fridges and freezers in different sizes and combinations depending on the space available and where you want to put them in your kitchen.



REFRIGERATION



# Professional Cooling Centre

Made from stainless steel both inside and out, the CAFF60 can be installed built-in or used as a freestanding fridge freezer with the addition of a pair of optional side panels [PANCAFF60].

# PRODUCT CODE CAFF60

# DIMENSIONS

h:2129mm w:1214mm d:724.7mm [inc. door - excl. handle] d:778.7mm [inc. door and handle]

# PERFORMANCE

e Energy Class A++ Energy consumption 435kWh/yr Max. noise level 48dB[A] 13kg/24hrs freezing capacity

# FINISH AVAILABLE

Stainless steel

# FEATURES

- Argon filled triple glazed door
- Metal handles
- Plumbed internal automatic
- ice maker - Filtered water supply for
- ice maker
- Electronic touch control with digital display
- 3 temperature zones
- Each fridge zone can be turned off independently
- Dual refrigeration system with 2 compressors and 3 evaporators
- 4 Star 216 litres, 2 star 31 litres
- Auto defrost
- Frost-free
- Super freeze and super cool functions
- Sabbath mode
- Open door alarm
- Forced air flow design
- Vegi-fresh compartment to keep vegetables fresh for longer

- Ambient humidity sensor for optimum performance
- Time and date display
- 100% CFC / HFC free
- Enhanced LED lighting through illuminated shelf supports
- Front access to levelling
- Can be installed built-in or freestanding with optional side panels [PANCAFF60]
- Climate class SN/T

# DESIGN

- Stainless steel exterior and interior

# STORAGE

- 6 Safety glass shelves
- 1 Sliding bottle tray
- 2 Freezer drawers
- 1 Crisper drawer
- 1 Ice compartment with ice maker
- 1 Glass marinating tray

# CAPACITY

- 29 Cu ft/820 Litre total net capacity
- 25.2 Cu ft/713 Litre total gross capacity
- 16.5 Cu ft/466 Litre fridge net capacity
- 8.7 Cu ft/247 Litre freezer net capacity

# OPTIONAL EXTRAS

- Pair of side panels for freestanding installation [PANCAFF60]
- Replacement water filter [FILTER/CAFF60]
- Visit caple.co.uk for full range

# INSTALLATION

- Diagram [p.245]

# FEATURE RICH DESIGN

An argon filled triple glazed fridge compartment door allows you to see instantly what is in the fridge, which is further enhanced by subtle interior lights and illuminated shelf supports.

Supersized, super efficient and super stylish, the CAFF60, if your lucky enough to have the space in your kitchen, has everything you'd ever want in a large modern fridge freezer.

# FREEZER AND FRIDGE ZONES

The CAFF60 has three separate temperature zones; one freezer and two fridge zones. The fridge zones are split into two. One behind the glazed door and the other one made up of the two fridge drawers directly below. All three zones can have different temperatures depending on your preference. The top fridge drawer also houses a veg-fresh compartment which is used to keep vegetables fresh for longer.

# **ELECTRONIC TOUCH CONTROLS**

Each of the temperature zones can be controlled using the electronic touch control digital display. Other functions including date, time and a Sabbath mode can be easily accessed from this display panel too.

# AUTOMATIC ICE MAKER

Convenience and capacity are very important when a fridge freezer like the CAFF60 is considered. Having a massive 820 litre total net capacity and the convenience of a filtered water ice maker, easily meets both requirements.

# LED SHELF LIGHTING

Each shelf is enhanced by LED lighting acting as the shelf support. Not only does it give a dramatic look, it also ensures you can see exactly what your looking for.









COOLING

# PROFESSIONAL REFRIGERATION



# **Freestanding Refrigeration**

Convenience, additional storage and ease of use are the benefits of a French door fridge freezer compared to other types of refrigeration.

# DOUBLE UP

Two freezer drawers gives you easy access to your food and with the capacity of 167L, the CAFF41 can freeze all your tasty treats until you need them.

# FULL ILLUMINTION

The stylish backlight takes centre stage illuminating the entire fridge from top to button ensuring you can see all your fridge's contents quickly and easily.

# STEEL TRIMMED INTERIOR

Glass shelves with deluxe steel trims to catch any spills.





# INTERNAL LED LIGHTING & TOUCH CONTROLS

Bold, well positioned LED lighting illuminate the interior of the fridge for excellent visibility while the touch controls provide quick access to all the handy functions.



# WATER FILTERS

Fresh, great tasting filtered water supplied at the touch of a button. It improves the taste and odour by reducing chlorine, heavy metals and other sediments found in your tap water supply. It is located at the rear of the fridge compartment to allow easy access and it is quick to change with its simple, twist fit installation.



# STYLISH VERSATILITY

The CAFF45GM features smart LED touch controls, cool gunmetal trim interior and four large capacity compartments, one of which can be used as a fridge or a freezer – the perfect combination of style and substance. COOLING

# FOUR DOOR FRIDGE FREEZER





# PRODUCT CODE

CAFF45GM

# DIMENSIONS

h:1849mm w:910mm d:747mm [inc. door - excl. handle] d:796mm [inc. door and handle]

# PERFORMANCE

Energy Class A+
 Energy consumption
 461kWh/yr
 Max. noise level 46dB
 Freezing capacity
 13kg/24hrs

# FINISH AVAILABLE

Gunmetal

# FEATURES

- Super freeze and super cool functions
- Electronic touch control with LED display
- 4 Star freezer
- Frost-free
- High temperature alarm
- Open door alarm
- Holiday modeEco mode
- Light sensor mode
- Drink chilling alarm
- Multi-air flow design in fridge and freezer compartments
- Self closing meat chiller compartment
- Child safety lock
- 100% CFC / HFC free
- Enhanced energy saving LED lighting
- Climate class T/N

### DESIGN

- Gunmetal doors with grey cabinet
- Metal handles
- Gunmetal trimmed interior
- Metal back

### STORAGE

- 2 Spill-capture adjustable glass shelves
- 1 Spill-proof shelf crisper lid
- 2 Salad crispers
- 1 Meat chiller compartment
- 2 Covered dairy compartments
- 6 Door storage racks
- 4 Freezer drawers,
- 2 compartments
- Ice cube tray
- Egg stroage tray

# CAPACITY

- 552 Litre total net capacity
- 630 Litre total gross capacity
- 390 Litre fridge net capacity
- 170 Litre freezer net capacity

# INSTALLATION

- Diagram [p.246]

# Features

# LIGHT SENSOR MODE

Is an energy saving feature, which uses a sensor to recognise if there is sufficiant light in the room to illuminate the fridge compartment, if so the internal lights do not switch on [this mode can be switch on or off].

# FREEZER/FRIDGE COMPARTMENT

The bottom left compartment can be used as either fridge or freezer temperature storage.

# FRENCH DOOR FRIDGE FREEZER





# 161

160

COOLING

# PRODUCT CODE

CAFF41

 $\leftrightarrow$ 

# DIMENSIONS

h:1850mm w:910mm d:763mm [inc. door - excl. handle] d:812mm [inc. door and handle]

# PERFORMANCE

Energy Class A+ Energy consumption 473kWh/yr Max. noise level 45dB Freezing capacity 20kg/24hrs

# FINISH AVAILABLE

Stainless Steel

# FEATURES

- Super freeze and super cool functions
- Electronic touch control with LED display
- 4 Star freezer
- Frost-freeHigh temperature alarm
- Open door alarm
- Holiday mode
- Eco mode
- Drink chilling alarm
- Multi-air flow design in fridge
- and freezer compartments
- Self closing meat chiller compartment
- Child safety lock
- 100% CFC / HFC free
- Enhanced energy saving LED lighting
- Climate class T/N

# DESIGN

- Stainless steel doors with grey cabinet
- Metal handles
- Steel trimmed interior

### STORAGE

- 2 Spill-capture adjustable
- glass shelves - 1 Spill-proof shelf crisper lid
- 2 Salad crispers
- 1 Meat chiller compartment
- 2 Covered dairy compartments
- 6 Door storage racks
- 2 Freezer drawers,
- 3 compartments
- Ice cube tray
- Egg stroage tray

# CAPACITY

- 557 Litre total net capacity
- 653 Litre total gross capacity
- 390 Litre fridge net capacity
- 167 Litre freezer net capacity

# INSTALLATION

- Diagram [p.247]

# SIDE-BY-SIDE FRIDGE FREEZER





# PRODUCT CODE

CAFF23

 $\leftrightarrow$ 

# DIMENSIONS

h:1751mm w:922mm d:700mm [inc. door - excl. handle] d:751mm [inc. door and handle]

# PERFORMANCE

e Energy Class A+ Energy consumption 456kWh/yr Max. noise level 45dB Freezing capacity 15kg/24 hrs

# FINISH AVAILABLE

Stainless Steel

# FEATURES

- Super freeze and super cool functions
- Electronic touch control with LED display
- 4 Star freezer [2 star in door storage]
- Auto defrost
- Frost-free
- High temperature alarm
- Open door alarm
- Multi air flow system
- Child safety lock
- 100% CFC/HFC free
- Internal LED lights

# DESIGN

- Stainless steel doors with a grey cabinet
- Metal curved handles

# STORAGE

- 6 Spill-capture adjustable glass shelves
- 1 Spill-proof crisper lid
- 2 Salad crispers
- 1 Covered dairy compartment
- 9 Door storage racks
- 2 Freezer drawers

# CAPACITY

- 20.55 Cu ft/582 Litre total net capacity
- 22.25 Cu ft/630 Litre total gross capacity
- 13.21 Cu ft/374 Litre fridge net capacity
- 7.35 Cu ft/208 Litre freezer net capacity

# INSTALLATION

- Diagram [p.248]

# SIDE-BY-SIDE FRIDGE FREEZERS



CAFF207SS

# PRODUCT CODE

Stainless Steel	CAFF207SS
Black	CAFF207Bk

# DIMENSIONS

h:1751mm w:923mm d:700mm [inc. door - excl. handle] d:770mm [inc. door and handle]

# PERFORMANCE

e Energy Class A+ Energy consumption 420kWh/yr Max. noise level 45dB Freezing capacity 12kg/24hrs

# FINISH AVAILABLE

Stainless Steel

# Black

- FEATURES
- In door ice and water dispenser
- Cubed and crushed ice - Electronic control with
- LED display
- 4 Star [2 star in door storage]
- Auto defrost - Frost-free
- Super freeze and super
- cool functions - High temperature alarm
- Open door alarm
- Multi-air flow design
- Easyfit water filter cartridge located in the fridge compartment
- Child lock
- 100% CFC / HFC free



# CAFF207BK

- Enhanced LED lighting
- Climate class SN-N-ST-T

# DESIGN

- Stainless steel doors with a grey cabinet or black doors with a black cabinet
- Metal curved handles

# STORAGE

- 5 Spill-capture adjustable glass shelves
- 2 Crispers
- 8 Door storage racks
- 1 Dairy compartment
- 2 Freezer drawers

# Features

# ICE AND WATER?

Choose between crushed or cubed ice. Chilled, filtered water is also available at the touch of a button on our CAFF207 models that can be plumbed directly in to your kitchen.

# CAPACITY - 19.42 Cu ft/550 Litre

- total net capacity - 22.25 Cu ft/630 Litre
- total gross capacity
- 12.85 Cu ft/364 Litre fridge net capacity
- 6.57 Cu ft/186 Litre freezer net capacity

# **OPTIONAL EXTRAS**

- Replacement water filter [FILTER/CAFF205]
  - Visit caple.co.uk for full range

### INSTALLATION

- Diagram [p.248]

COOLING

162

163



# FREESTANDING 70/30 FRIDGE FREEZER

# PRODUCT CODE

RFF730

# DIMENSIONS

↔ h:1860mm w: 595mm d:650mm [inc. door - excl. handle]

# PERFORMANCE

e Energy Class A++ Energy consumption 263kWh/yr Max. noise level 42dB [A]

# FINISH AVAILABLE

Stainless Steel

# GENERAL FEATURES

- Electronic touch control
- Independently electronic temperature control for fridge and freezer

- Energy saving display
- off option - Easy to use control panel
- Right hand hinged door\*
- Interior LED light
- Child lock
- Holiday mode
- Eco mode
- Feature metal handles
- High temperature alarm
- 100% CFC / HFC free
- Climate class T/SN

# Fridge

- Auto defrost
- Super cool
- Fan cooled
- Humidity controlled fruit and veg drawer
- Chiller drawer for meat and fish
- Wine rack

# Freezer

- Frost free
- Super freeze
- Drink cooling mode
- Safety stop drawers
- Freezing capacity 12kg/24hrs

# STORAGE

- 2 Adjustable glass shelves
- 1 Glass cover shelf
- 1 Salad crisper
- 1 Humidity controlled drawer
- 1 Wine rack
- 3 Plastic door storage compartments
- 1 Egg tray
- 3 Freezer drawers

- 1 ice cube tray

# CAPACITY

- 324 Litre total net capacity
- 341 Litre total gross capacity
- 94 Litre net freezer capacity
- 230 Litre net fridge capacity

# INSTALLATION

- Diagram [p.248]
- \* The door is supplied RH hinged, it can be reversed. Please consult a qualified installation expert to reverse door configuration.

# Features

# FRESH AIR FLOW TECHNOLOGY

The fan positioned at the top of the fridge circulates the cool air for even distribution keeping your food at the perfect temperature. Help preserve fresh foods for longer by adjusting the humidity in the crisper compartments.

# 2

co mode



# **Integrated Refrigeration**

Choose from tall column fridge or freezer combinations or compact under-counter models. How about an entirely separate fridge and freezer located in different spots around the kitchen? There are also tall all-in-one models that fit neatly into a single space.

Whatever you decide, it's reassuring to know that all of Caple's integrated refrigeration appliances have an A++ or A+ energy rating.

# **GLASS SHELVES**

Some with deluxe steel trims to catch any spills.

# **FROST-FREE**

No more laborious defrosting with a scraper. Our frost-free system works by heating up an element for a short time, which melts the ice and prevents build-up. Keeping a freezer ice-free means food stays fresher for longer. Freezing food is also much quicker, preserving as many nutrients as possible and freeing up much needed storage space.

# MODERN LIVING

The RiL1795 fridge and RiF1795 freezer have been designed with modern living in mind. The matching, in-column fridge and freezer are hidden behind your cabinet doors for an ultra neat finish in a contemporary or classic kitchen.

# FULLY ADJUSTABLE SHELF

Key features in the A++ rated RiL1795 fridge include a fully adjustable shelf in the door for true flexibility in your cooling appliance.

# ENHANCED LIGHTING

LED strip lighting across the top and down each side of the fridge for a stylish, practical finish.



# PRODUCT CODE

Ri7305



# PERFORMANCE

e Energy Class A++ Energy consumption 226kWh/yr Max. noise level 52dB[A] 4kg/24hrs freezing capacity

# FINISH AVAILABLE

White

# FEATURES

- Top and side LED strip lights
- Electronic controls
- Adjustable thermostat
- Auto defrost [Fridge]
- Frost free [Freezer]
- Super cooling and freezing mode
- Caple cool air-flow system
- Caple fresh
- Humidity controlled drawer
- Adjustable door balcony
- 100% CFC/HFC free
- Reversible door
- Sliding door installation

# DESIGN

- Deluxe steel trimmed interior
- Transparent plastic drawers and compartments
- Climate class ST/N [16°C 38°C]

# STORAGE

- 3 Door storage compartments
- 1 adjustable door balcony
- 1 Drawer compartments [with humidity control for fruit and vegetable storage]
- 3 Removable glass shelves, 1 Crisper cover shelf
- 3 Freezer drawers
- 1 Egg tray
- 1 lce tray

# CAPACITY

- 243 Litre total net capacity
- 256 Litre total gross capacity
- 180 Litre fridge net capacity
- 63 Litre freezer net capacity

# INSTALLATION

- Diagram [p.249]

# Features

# THE FRESHEST FOOD

Caple Fresh technology eliminates ethylene gas [a by-product of fresh foods] inside the vegetable drawer, therefore enabling your fresh food to last for longer. Caple's cool airflow system also ensures cold air will flow to every level for even chilling.



# LED LIGHTING & ELECTRONIC CONTROLS

Strip LED lighting adds a modern feel, while electronic controls are precise and easy to use.



# 70/30 FRIDGE FREEZER




# PRODUCT CODE

Ri7300



# PERFORMANCE



# FINISH AVAILABLE

\_\_\_\_\_

# FEATURES - Top LED light

- Manual controls
- Adjustable thermostatAuto defrost [Fridge]
- Humidity controlled drawer
- 100% CFC/HFC free
- Reversible door
- Sliding door installation

# DESIGN

- Transparent plastic drawers and compartments

# STORAGE

- 4 Door storage compartments
- 1 Drawer compartments [with humidity controls for fruit and vegetable storage]
- 3 Removable glass shelves, 1 Crisper cover shelf
- 3 Freezer drawers
- 1 Egg tray
- 1 Ice tray
- 1 Plastic ice scraper

# CAPACITY

- 251 Litre total net capacity
- 256 Litre total gross capacity
- 181 Litre fridge net capacity
- 70 Litre freezer net capacity

# INSTALLATION

- Diagram [p.249]



# 50/50 FRIDGE FREEZER -FROST-FREE



# PRODUCT CODE

Ri5505



# PERFORMANCE

e Energy Class A++ Energy consumption 235kWh/yr Max. noise level 43dB[A] 3kg/24hrs freezing capacity

# FINISH AVAILABLE

# FEATURES

- Top LED strip light
- Electronic controls
- Adjustable thermostat
- Auto defrost [Fridge]
- Frost free [Freezer]
- Super cooling and freezing mode
- Caple cool air-flow system
- Caple fresh
- Humidity controlled drawer
- Adjustable door balcony
- 100% CFC/HFC free

# - Reversible door

- Sliding door installation

# DESIGN

- Deluxe steel trimmed interior
- Transparent plastic drawers and compartments

# STORAGE

- 3 Door storage compartments
- 1 Drawer compartments [with humidity controls for fruit and vegetable storage]
- 3 Removable glass shelves,
   1 Crisper cover shelf
- 4 Freezer drawers
- 1 Egg tray
- 1 lce tray

# CAPACITY

- 233 Litre total net capacity
- 249 Litre total gross capacity
- 148 Litre fridge net capacity
- 86 Litre freezer net capacity

# INSTALLATION

- Diagram [p.249]

# 50/50 FRIDGE FREEZER



# PRODUCT CODE

Ri5500

# DIMENSIONS

 $\leftrightarrow$  h:1770mm

# PERFORMANCE

e Energy Class A+ Energy consumption 277kWh/yr Max. noise level 38dB[A] 5kg/24hrs freezing capacity

# FINISH AVAILABLE

# White

# FEATURES

- Top LED light
- Manual controls
- Adjustable thermostat
- Auto defrost [Fridge]
- Humidity controlled drawer
- 100% CFC/HFC free
- Reversible door
- Sliding door installation

# DESIGN

- Transparent plastic drawers

and compartments

# STORAGE

- Door storage compartments
- 1 Drawer compartments [with humidity controls for fruit and vegetable storage]
- 3 Removable glass shelves, 1 Crisper cover shelf
- 4 Freezer drawers
- 1 Egg tray
- 1 Ice tray
- 1 Plastic ice scraper

# CAPACITY

- 242 Litre total net capacity
- 249 Litre total gross capacity
- 148 Litre fridge net capacity
- 94 Litre freezer net capacity

# INSTALLATION

- Diagram [p.249]

168 169

COOLING

# **IN-COLUMN LARDER FRIDGE**



# PRODUCT CODE

RiL1795

DIMENSIONS h:1770mm

# PERFORMANCE

e Energy class A++ Energy consumption 111kWh/yr Max. noise 39dB [A]

FINISH AVAILABLE

White

# FEATURES

- Matches RIF1795 freezer
- Top and side LED strip lights
- Electronic controls
- Adjustable thermostat
- Auto defrost
- Super cooling mode
- Caple cool air-flow system
- Caple fresh
- Humidity controlled drawer
- Easy adjustable door balcony
- 100% CFC/HFC free
- Reversible door
- Sliding door installation

# DESIGN

- Deluxe steel trimmed interior
- Transparent plastic drawers and compartments

# STORAGE

- 4 Standard door storage compartments
- 1 Easy adjustable door compartment
- 2 Drawer compartments [1 with humidity controls for fruit and vegetable storage]
- 1 bottle rack
- 4 Removable glass shelves
- 1 Glass drawer cover shelf
- 1 Egg tray

# CAPACITY

- 300 Litre total net capacity
- 303 Litre total gross capacity

# INSTALLATION

- Diagram [p.249]

# Features

# FRUIT & VEGETABLE PRESERVATION

The new Caple Fresh preservation technology inside the crisper drawer, ensures that your fruit and vegetables stay fresher and tastier for longer. This innovative new system helps to eliminate the natural gases that are produced during the ripening and ageing process, preserving them for longer. Also, the Caple Fresh preserver does not need to be replaced. It can be regenerated by exposing it to sunlight for one day a year.



# **IN-COLUMN FREEZER - FROST FREE**



# PRODUCT CODE RiF1795

DIMENSIONS

# PERFORMANCE

e Energy class A+ Energy consumption 297kWh/yr Max. noise 41dB [A] 15kg / 24hr freezing capacity

# FINISH AVAILABLE

White

# GENERAL FEATURES

- Top LED strip light
- Electronic controls
- Adjustable thermostat
- Frost free
- Twist Ice cube maker

# Features

# FROST-FREE

No more laborious defrosting with a scraper. Our frost-free system works by heating up an element for a short time, which melts the ice and prevents build-up. Keeping a freezer ice-free means food stays fresher for longer. Freezing food is also much quicker, preserving as many nutrients as possible and freeing up much needed storage space.

# LED LIGHTING & ELECTRONIC CONTROLS

Strip LED lighting adds a modern feel, while electronic controls are precise and easy to use.



# TWIST ICE CUBE MAKER

The new twist ice cube maker is a convenient way to make ice, with the added benefits of easy removal for cleaning for those times when you need the extra space.

# - Super Freeze mode

- 4 star
- 100% CFC/HFC free
- Reversible door
- Sliding door installation

# DESIGN

- Deluxe steel trimmed interior
- Transparent plastic drawers

# STORAGE

- 6 Drawers
- 2 flip down door compartments
- 1 Ice cube tray
- 1 Twist ice cube maker

# CAPACITY

- 197 Litre total net capacity
- 221 Litre total gross capacity

# INSTALLATION

- Diagram [p.249]

COOLING

170

171

# **IN-COLUMN LARDER FRIDGE**



PRODUCT CODE

RiL124

# DIMENSIONS

 $\leftrightarrow$  h:1220mm

# PERFORMANCE

e Energy Class A+ Energy consumption 128kWh/yr Max. noise level 41dB[A]

FINISH AVAILABLE White

# FEATURES

- Matches RiF123 freezer
- Mechanically controlled
- Auto defrost
- Adjustable thermostat
- Interior LED light
- Sliding door installation
- Reversible door

# DESIGN

- Deluxe steel trimmed interior - Transparent plastic drawer and compartments

# STORAGE

- 4 Removable glass shelves
- 1 Glass crisper cover shelf
- 1 Salad crisper
- 3 Plastic door storage compartments

- 1 Egg tray

- 197 Litre total net capacity
- 208 Litre total gross capacity

# INSTALLATION

- Diagram [p.250]

# **IN-COLUMN FREEZER**



# PRODUCT CODE RiF123

# DIMENSIONS

 $\leftrightarrow$  h:1220mm



Energy consumption 216kWh/yr Max. noise level 41dB[A]

6.5kg/24hrs freezing capacity

# FINISH AVAILABLE

White

# FEATURES

- Matches RiL124 larder fridge
- Super freeze function
- Mechanically controlled
- 4 Star
- Manual defrost
- Adjustable thermostat
- Temperature alarm
- 100% CFC/HFC free
- Sliding door installation
- Reversible door

# DESIGN

- Transparent blue plastic drawers

# STORAGE

- 5 Drawers
- 1 Ice cube tray

# CAPACITY

- 130 Litre total net capacity
- 145 Litre total gross capacity

# INSTALLATION

- Diagram [p.250]



# CAPACITY

# **IN-COLUMN LARDER FRIDGE**

# **IN-COLUMN FREEZER**



# PRODUCT CODE RiL891

# DIMENSIONS

 $\leftrightarrow$  h:880mm

# PERFORMANCE

e Energy Class A+ Energy consumption 120kWh/yr Max. noise level 41dB[A]

# FINISH AVAILABLE

White

# FEATURES

- Matches RiF89 freezer
- Mechanically controlled
- Auto defrost
- Adjustable thermostat
- Interior light
- Sliding door installation
- Reversible door

# DESIGN

- Deluxe steel trimmed interior
- Transparent plastic drawer and compartments

# STORAGE

- 3 Removable glass shelves
- 1 Glass crisper cover shelf
- 1 Salad crisper
- 3 Plastic door storage compartments
- 1 Egg tray

# CAPACITY

- 135 Litre total net capacity
- 144 Litre total gross capacity

# INSTALLATION

- Diagram [p.250]



# PRODUCT CODE

RiF89



# → h:880mm

# PERFORMANCE

- e Energy Class A+ Energy consumption 181kWh/yr Max. noise level 41dB[A] 4.5kg/24hrs freezing capacity

# FINISH AVAILABLE

White

# FEATURES

- Matches RiL891 larder fridge
- Super freeze function
- Mechanically controlled
- 4 Star
- Manual defrost
- Adjustable thermostat
- 100% CFC/HFC free
- Sliding door installation
- Reversible door

# plastic drawers STORAGE

- Transparent blue

# - 4 Drawers

DESIGN

- 1 Ice cube tray

# CAPACITY

- 77 Litre total net capacity
- 93 Litre total gross capacity

# INSTALLATION

- Diagram [p.250]



COOLING



# **BUILT-UNDER LARDER FRIDGE**



# PRODUCT CODE RBL4

# DIMENSIONS

 $\leftrightarrow$  w:595mm

# PERFORMANCE

e Energy Class A+ Energy consumption 115kWh/yr Max. noise level 39dB[A]

# FINISH AVAILABLE

White

# FEATURES

- Matches RBF4 freezer
- Mechanically controlled
- Auto defrost
- Adjustable thermostat
- 100% CFC/HFC free
- Fixed door installation
- Reversible door
- Interior LED light

# DESIGN

- Deluxe silver trimmed door balconies

- Transparent glass shelves and plastic compartments

# STORAGE

- 2 Adjustable glass shelves
- 1 Glass crisper cover shelf
- 1 Salad crispers
- 2 Plastic door storage compartments
- 1 Egg tray

### CAPACITY

- 133 Litre total net capacity
- 136 Litre total gross capacity

# INSTALLATION

- Diagram [p.250]

# **BUILT-UNDER FREEZER**

# **BUILT-UNDER LARDER FRIDGE** WITH ICE BOX





# PRODUCT CODE RBF4

DESIGN - Transparent plastic drawers

# DIMENSIONS

 $\leftrightarrow$  w:595mm

# PERFORMANCE

e Energy Class A+ Energy consumption 177kWh/yr Max. noise level 41dB[A] 9kg/24hrs freezing capacity

# FINISH AVAILABLE

White

# FEATURES

- Matches RBL4 larder fridge
- Mechanically controlled
- 4 Star
- Manual defrost
- Adjustable thermostat
- 100% CFC/HFC free
- Reversible door
- Fixed door installation

- STORAGE
- 3 Drawers
- 1 Ice cube tray

# CAPACITY

- 93 Litre total net capacity
- 107 Litre total gross capacity

# INSTALLATION

- Diagram [p.250]

# RBR6

PRODUCT CODE



# PERFORMANCE

e Energy Class A+ Energy consumption 171kWh/yr Max. noise level 39dB[A] 2kg/24hrs freezing capacity

# FINISH AVAILABLE

White

# FEATURES

- Matches RBF4 freezer
- Mechanically controlled
- Adjustable thermostat
- 100% CFC/HFC free
- Fixed door installation
- Reversible door
- Ice box open/closed indicator

# Fridge

- Auto defrost
- Interior LED light

# Ice Box

# - 4 Star

- Manual defrost

# DESIGN

- Deluxe silver trimmed door balconies
- Transparent glass shelves and plastic compartments

# STORAGE

- 1 Glass shelf
- 1 Glass crisper cover shelf
- 1 Salad crisper
- 2 Plastic door storage compartments
- 1 Egg tray
- 1 Ice cube tray

# CAPACITY

- 115 Litre total net capacity
- 120 Litre total gross capacity
- 98 Litre fridge net capacity
- 17 Litre ice box net capacity

# INSTALLATION

- Diagram [p.250]

# COOLING

# 174 175

INTEGRATED REFRIGERATION



# Wine Cabinets

Caple's wine cabinets create the optimum storage conditions for your wine; the correct temperature, humidity and air circulation. They even use low vibration technology to minimise disturbance.

And of course, they look great.

COOLING 176 WINE CABINETS

# CARE FOR YOUR COLLECTION

# THE RIGHT TEMPERATURE

# **TO STORE**

All wine should be stored at 12-14°C whether red or white. Our cabinets simulate cellar conditions - dark, still, humid and a constant temperature.

# TO SERVE

For rosés and whites it's 8-14°C, for sparkling wines it's 6-10°C. Full reds need 16-18°C, whereas lighter ones are best at 13-16°C. For some wine cabinets this temperature variation is a problem. However, Caple cabinets can offer multiple zones that keep all your wines at the perfect temperature for storing or better still, serving.

# COMPRESSOR COOLING

When choosing a wine cabinet it's important to consider the type of cooling system it uses. Many conventional cabinets use thermo electric technology, which is only capable of cooling to 15°C below the room's ambient temperature. So on a warm day of 25°C the contents will only cool to a minimum of 10°C, leaving your wine exposed to potentially damaging temperatures.

Caple's wine cabinets use a compressor cooling system, which maintains precisely the right temperature, regardless of the ambient room temperature.



# FINER WINE

Vibration and humidity during storage will influence how your wine will taste when it's finally poured. That's why Caple's wine cabinets come with anti-vibration gaskets and low vibration compressors to prevent disturbance to the wine's sediment balance. Our cabinets also create an ideal atmosphere of above 65% humidity, to preserve cork quality and prevent mould and odours. You can be confident your wine is in good hands.



# THE IMPORTANCE OF LIGHTING AND STACKING

Ultraviolet light causes lightstrike, which makes wine age prematurely. So it's important to avoid exposing bottles to sunlight or fluorescent light. Our white LEDs not only look great, they are also UV-free with no heat output either.

Bottles should usually be stored on their side so the wine stays in contact with the cork. This keeps the cork moist and ensures a good air seal for the bottle, which prevents oxidation and immediate ageing. Wine benefits best from side storage if the level of the wine reaches at least the upper shoulder of the bottle when upright. Caple's wine cabinets provide sufficient shelves to allow for bottles to be stored either on a single level for easy reach, or stacked for longer storage.

# SENSE PREMIUM WINE CABINET FEATURES



# **TELESCOPIC SHELVES**

The beech and stainless fronted telescopic wire shelves are gentle on the bottles, reducing any accidental scratches on the label and allowing you to easily view your collection. Perfect for Burgundy, Bordeaux and Champagne bottles.



# CHARCOAL FILTERS

Charcoal filters eliminate odours and impurities in the air, preventing them from penetrating the cork, to ensure your collection is at its best when it comes to serving.



# PREMIUM FUNCTIONALITY

Four light settings and four functions including Eco means you can find the right storage environment to suit your wine.

# **300MM MODEL**

Sense Premium 300mm model [Wi3150] available, see page 190



Wi6160

#### SENSE PREMIUM UNDERCOUNTER **DUAL ZONE WINE CABINETS**

#### PRODUCT CODE

Fully Integrated Stainless Steel

Wi6160 Wi6150



#### PERFORMANCE

e Energy Class A+ Energy consumption 109kWh/yr Ambient temperature 16°C-32°C Temperature range upper zone 5°C-10°C, lower zone 10°C-18°C Humidity range >65%RH Quiet operation 43dB[A]

#### FUNCTIONS

4 Light Functions

- On/Off
- Door Opening Light
- Timer
- Brightness

#### 4 Programme Settings - Normal

- Eco
- Intelligent
- Demo

#### **GENERAL FEATURES**

- No frost compressor cooling technology maintains a consistent temperature
- Dual stacked temperature zones, independently controlled [upper zone for serving, lower zone for storage]
- Touch controls
- White LED display
- Charcoal filter
- UV/heat-free white LED lighting [switchable]
- Temperature and door alarm
- 100% CFC/HFC free
- Vibration free
- Fan circulated cool air for even temperature distribution
- Reversible door
- Upper zone has 2 sliding shelves
- Lower zone has 2 sliding shelves and 1 base shelf

#### - Toughened UV protected glass door

- Black cabinet interior and exterior

Wi6150

- Adjustable height to fit 100-150mm plinth
- Recessed for fitting furniture plinth
- Telescopic beech fronted wire shelves with steel trim
- Supplied with stainless steel universal plinth grille

#### WI6150 UNIQUE FEATURES

w:525mm

- One piece stainless steel door
- Stainless steel handle

#### WI6160 UNIQUE FEATURE

- Bespoke furniture door to match your kitchen cabinets

#### CAPACITY

- Wi6160 Stores max. 35 Bordeaux style wine bottles 750ml
- Wi6150 Stores max. 44 Bordeaux style wine bottles 750ml Bottle stacking diagrams

available at caple.co.uk

#### OPTIONAL EXTRAS

- Glass shelf x1 [GSHELF3]
- Alternative handle [HANDLE7]
- Replacement carbon filter
- Visit caple.co.uk for full range

# WINE CABINETS

- [WC1CF]

#### INSTALLATION

#### - Diagram [p.251]

181

COOLING

# SENSE & CLASSIC WINE CABINET FEATURES

#### CHAMPAGNE SHELVES

The easy-slide beech shelves are non-scratch so they won't damage bottle labels. If champagne is your drink of choice, the slatted design allows you to store larger bottles so you're prepared for any special occasion.



#### PLINTH GRILLE

A full plinth or recessed plinth grille option is available for our undercounter wine cabinets. They neatly cover the ventilation hole in the plinth and blend in with your kitchen décor. [Suitable for undercounter models except Wi154 and Wi155.]



UNIVERSAL PLINTH GRILLE

[code GRILL/SENSE600]

- Stainless steel top fixing plinth grille

- W 525mm



#### UNIVERSAL PLINTH GRILLE [code GRILL/SENSE300]

- Stainless steel top fixing plinth grille

- W 250mm




# FULL HEIGHT STAINLESS STEEL PLINTH GRILLES

w: 300mm

w: 600mm

GRILL/CLASS301 for Wi3124 and Wi3122WH GRILL/CLASS601 for Wi6233, Wi6141 and Wi6134

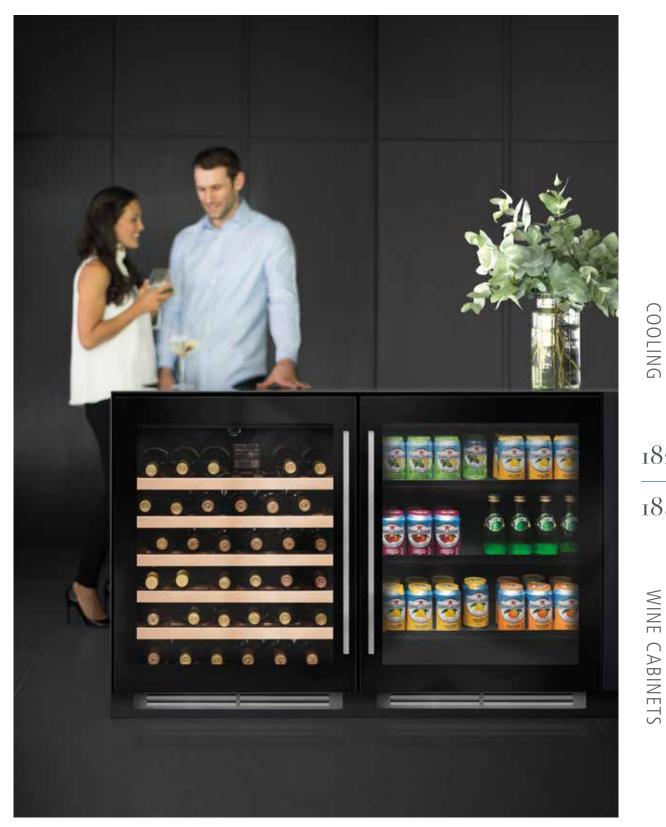

#### DUAL ZONE

Dual zone wine cabinets allow you to store your collection at the perfect temperature for storing and drinking.

#### **TOUCH CONTROL** . . . . . . . . . . . . . . . . WHITE LED DISPLAY

#### **GLASS SHELVES**

The three pack of glass shelves allows you to convert some of your wine cabinet into storage for canned drinks. 182 183

COOLING

**DUAL ZONE WINE CABINETS** 



WI6134



Wi6133GM



#### PRODUCT CODE

Black GlassWi6134GunmetalWi6133GMStainless SteelWi6133



→ w:595mm

#### PERFORMANCE

e Energy Class B Energy consumption 198kWh/yr Ambient temperature 16°C-32°C

Temperature range upper zone 5°C-10°C, lower zone 10°C-18°C Humidity range >65%RH Quiet operation 43dB[A]

#### FINISH AVAILABLE

Black Glass

Gunmetal

Stainless Steel

#### GENERAL FEATURES

- No-frost compressor cooling technology maintains a consistent temperature
- Dual stacked temperature zones, independently controlled [upper zone serving, lower zone storage]
- Touch control and LED display
- UV/heat-free white LED lighting [switchable]
- Vibration free
- Adjustable height to fit 100-150mm plinth
- Stainless steel square handle
- Beech shelves
- Fan circulated cool air for even temperature distribution
- Heater raises internal temperature when external temperature drops
- Reversible door
- Upper zone has 2 sliding shelves
- Lower zone has 3 sliding shelves and 1 base shelf

- Toughened UV protected glass door
- 2 Humidity control water tanks
- 100% CFC/HFC free
- Black cabinet interior and exterior
- Recessed for fitting furniture plinth
- Air ventilation through plinth grille

#### WI6134 UNIQUE FEATURES

- Black glass doors with gloss black door frame
- Supplied with stainless steel universal plinth grille w:525mm

#### WI6133GM UNIQUE FEATURES

- One piece gunmetal door
- Supplied with stainless steel universal plinth grille w:525mm

#### Wi6133 UNIQUE FEATURES

 One piece stainless steel door
 Supplied with both stainless steel universal plinth grille w:525mm and full width grille

#### CAPACITY


- 4.73 Cu Ft/134 Litre total net capacity
- 5.79 Cu ft/164 Litre total gross capacity
- Stores max. 46 Bordeaux style wine bottles 750ml [16 white and 30 red bottles]
   Bottle stacking diagrams available at caple.co.uk

#### OPTIONAL EXTRAS

- Full height stainless steel grille with fixing brackets [GRILL/CLASS601]
- Alternative black-spot bar handle [HANDLE3]
- Alternative curved handle [HANDLE4]
- Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.251]

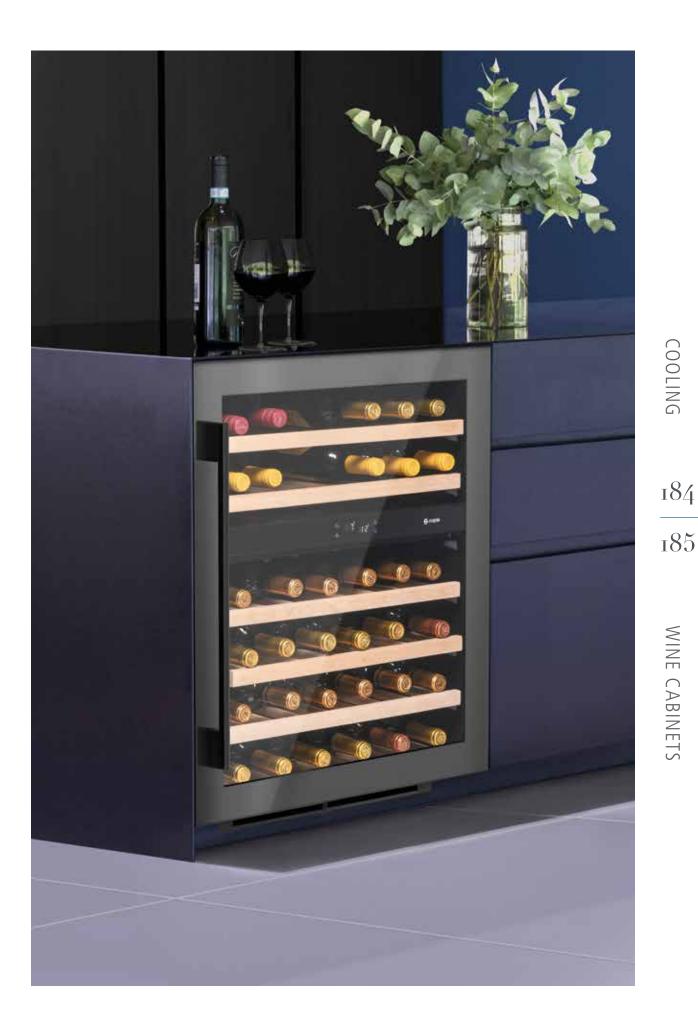



#### PRODUCT CODE

Wi6132WH

#### DIMENSIONS

 $\leftrightarrow$  w:595mm

#### FINISH AVAILABLE

White Glass

#### PERFORMANCE

Energy Class B
 Energy consumption
 198kWh/yr
 Ambient temperature
 16°C-32°C
 Temperature range
 upper zone 5°C-10°C,
 lower zone 10°C-18°C
 Humidity range >65%RH
 Quiet operation 43dB[A]

- FEATURES
- No-frost compressor cooling technology maintains a consistent temperature
- Dual stacked temperature zones, independently controlled [upper zone serving, lower zone storage]
- Electronic temperature control and LED display
- UV/heat-free white LED lighting [switchable]
- Vibration free
- Adjustable height to fit 100-150mm plinth
- White glass door with white door frame
- Supplied with both stainless steel square handle and black-spot bar handle
- Stainless steel fronted beech shelves
- Fan circulated cool air for even temperature distribution
- Heater raises internal temperature when external temperature drops
- Reversible door
- Upper zone has
  - 2 sliding shelves
- Lower zone has 3 sliding shelves and 1 base shelf

- Toughened UV protected glass door
- 2 Humidity control water tanks
- 100% CFC/HFC free
- Black cabinet interior and exterior
- Recessed for fitting furniture plinth
- Air ventilation through plinth grille
- Supplied with stainless steel universal plinth grille w:525mm

#### CAPACITY

- 4.73 Cu Ft/134 Litre total net capacity
- 5.79 Cu ft/164 Litre total gross capacity
- Stores max. 46 Bordeaux style wine bottles 750ml [16 upper zone and 30 lower zone]
   Bottle stacking diagrams available at caple.co.uk

#### OPTIONAL EXTRAS

- Full height stainless steel grille with fixing brackets [GRILL/CLASS601]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.251]

# SENSE AND CLASSIC UNDERCOUNTER DUAL ZONE WINE CABINETS



Wi6233



Wi6232

#### PRODUCT CODE

Black Glass Wi6233 Stainless Steel Wi6232

#### DIMENSIONS

↔ w:595mm

#### PERFORMANCE

e Energy Class B Energy consumption 195kWh/yr Ambient temperature 16°C-32°C Temperature range 5°C-18°C [both zones] Humidity range >65%RH Quiet operation 43dB[A]

#### FINISH AVAILABLE

Black Glass Stainless Steel

#### GENERAL FEATURES

- No-frost compressor cooling technology maintains a consistent temperature
- Dual side-by-side temperature zones, independently controlled [both zones suitable for either red or white wine]
- Touch control and LED display
- Converts into a can chiller using optional glass shelving
- UV/heat-free white LED lighting [switchable]
  - Vibration free
  - Adjustable height to fit 100-150mm plinth
- Stainless steel square handles
- Beech shelves
- Fan circulated cool air for even temperature distribution
- 5 Sliding shelves and 1 base shelf per zone

### - Toughened UV protected glass door

- 2 Humidity control water tanks
- 100% CFC/HFC free
- Black cabinet interior and exterior
- Recessed for fitting furniture plinth
- Air ventilation through plinth grille

#### WI6233 UNIQUE FEATURES

- Black glass doors with gloss black door frame
- Supplied with stainless steel universal plinth grille w:525mm

#### WI6232 UNIQUE FEATURES

- One piece stainless steel doors
- Supplied with both stainless steel universal plinth grille w:525mm and full width grille

#### CAPACITY

- 4.20 Cu ft/119 Litre total net capacity
- 4.73 Cu ft/134 Litre total gross capacity
- Stores max. 38 Bordeaux style wine bottles 750ml [19 bottles per zone]

Bottle stacking diagrams available at caple.co.uk

#### OPTIONAL EXTRAS

- 3 Frosted glass shelves with black plastic trim [GSHELFPACK/300]
- Full height stainless steel grille with fixing brackets [GRILL/CLASS601] Wi6233 only
- Alternative black-spot handle [HANDLE3]
- Alternative curved handle [HANDLE4]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.251]

COOLING

#### FLEXIBLE FITTING

A unique design feature incorporated into our undercounter wine cabinets allows the height of the plinth to be adjusted between 100mm and 150mm. So, you don't have to worry about your wine cabinet fitting under your work surface as they are compatible with varying plinth heights. [Not available on the Wi154 and Wi155].





## SENSE AND CLASSIC UNDERCOUNTER SINGLE ZONE WINE CABINETS



Wi6141

#### PRODUCT CODE

Wi6141

Wi6140

Black Glass Stainless Steel

#### DIMENSIONS

w:595mm

#### PERFORMANCE

Energy Class A
 Energy consumption
 145kWh/yr
 Ambient temperature
 16°C-32°C
 Temperature range
 5°C-18°C
 Humidity range >65%RH
 Quiet operation 43dB[A]

#### FINISH AVAILABLE

Black Glass

Stainless Steel

#### GENERAL FEATURES

- No-frost compressor cooling technology maintains a consistent temperature
- Single temperature zone stores red, white or sparkling wine
- Touch controls and LED displayConverts into a can chiller
- using optional glass shelving - UV/heat-free white LED
- lighting [switchable] - Vibration free
- Adjustable height to fit
- 100-150mm plinth - Stainless steel square handle
- Beech shelves
- Fan circulated cool air for even temperature distribution
- Reversible door
- 5 Sliding shelves and
- 1 base shelf
- Toughened UV protected glass door
- 1 Humidity control water tanks
- 100% CFC/HFC free

#### Wi6140

- Black cabinet interior and exterior
- Recessed for fitting furniture plinth
- Air ventilation through plinth grille

#### WI6141 UNIQUE FEATURES

- Black glass doors with gloss black door frame
- Supplied with stainless steel universal plinth grille w:525mm

#### Wi6140 UNIQUE FEATURES

- One piece stainless steel door
- Supplied with both stainless steel universal plinth grille w:525mm and full width grille

CAPACITY

- 5.15 Cu Ft/146 Litre total net capacity
- 5.79 Cu ft/164 Litre total gross capacity
- Stores max. 52 Bordeaux style wine bottles 750ml [8 bottles per sliding shelf, 6 bottles on base shelf, 14 on top shelf]
   Bottle stacking diagrams available at caple.co.uk

#### OPTIONAL EXTRAS

- 3 Frosted glass shelves with black plastic trim [GSHELFPACK/600]
- Full height stainless steel grille with fixing brackets [GRILL/CLASS601]
- Alternative black-spot bar handle [HANDLE3]
- Alternative curved handle [HANDLE4]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.251]

COOLING

188

189

#### SENSE PREMIUM UNDERCOUNTER SINGLE ZONE WINE CABINETS



#### Features

#### TELESCOPIC SHELVES

The beech and stainless fronted telescopic wire shelves are gentle on the bottles, reducing any accidental scratches on the label and allowing you to easily view your collection. Perfect for Burgundy, Bordeaux and Champagne bottles.

#### CHARCOAL FILTERS

Charcoal filters eliminate odours and impurities in the air, preventing them from penetrating the cork, to ensure your collection is at its best when it comes to serving.

#### PREMIUM FUNCTIONALITY

Four light settings and four functions including Eco means you can find the right storage environment to suit your wine.





#### PRODUCT CODE

Wi3150

#### DIMENSIONS



#### PERFORMANCE

Energy Class A+
 Energy consumption
 107kWh/yr
 Ambient temperature
 16°C-32°C
 Temperature range
 5°C-18°C
 Humidity range >65%RH
 Quiet operation 43dB[A]

#### FINISH AVAILABLE

Stainless Steel

#### FUNCTIONS

- 4 Light Functions
- On/Off
- Door Opening Light
- Timer
- Brightness
- 4 Programme Settings
- Normal
- Eco
- Intelligent
- Demo

#### - GENERAL FEATURES

- No-frost compressor cooling technology maintains a consistent temperature
- Single temperature zone stores red, white or sparkling wine
- White LED display
- Touch control

#### - Charcoal filter

- UV/heat-free white LED lighting [switchable]
- 100% CFC/HFC free
- Vibration free
- Fan circulated cool air for even temperature distribution
- Reversible door
- 5 Sliding shelves and 1 base shelf
- Toughened UV protected glass door
- Black cabinet interior and exterior
- Adjustable height to fit 100-150mm plinth
- Recessed for fitting furniture plinth
- Air ventilation through plinth grille
- One piece stainless steel door
- Stainless steel handle
- Telescopic beech fronted wire shelves with steel trim
- Supplied with both stainless steel universal plinth grille w:230mm and full width grille

#### CAPACITY

 Stores max. 20 Bordeaux style wine bottles 750ml
 Bottle stacking diagrams available at caple.co.uk

#### OPTIONAL EXTRAS

- Glass shelf x1 [GSHELF1]
- Alternative handle [HANDLE7]
- Replacement carbon filter [WC1CF]

Visit caple.co.uk for full range

INSTALLATION

- Diagram [p.252]

# SENSE AND CLASSIC UNDERCOUNTER SINGLE ZONE WINE CABINETS



WI3124



Wi3123

#### PRODUCT CODE

Black Glass Wi3124 Stainless Steel Wi3123

#### DIMENSIONS

 $\leftrightarrow$  w:295mm

#### PERFORMANCE

e Energy Class A Energy consumption 140kWh/yr Ambient temperature 16°C-32°C Temperature range 5°C-18°C Humidity range >65%RH Quiet operation 43dB[A]

#### FINISH AVAILABLE

#### Black Glass

Stainless Steel

#### GENERAL FEATURES

- No-frost compressor cooling technology maintains a consistent temperature
- Single temperature zone stores red, white or sparkling wine
- Touch control and LED display
- Converts into a can chiller using optional glass shelving
- UV/heat-free white LED lighting [switchable]
- Vibration free
- Adjustable height to fit 100-150mm plinth
- One piece stainless steel door
- Stainless steel square handle
- Beech shelves
- Fan circulated cool air for even temperature distribution
- Reversible door
- 5 Sliding shelves and 1 base shelf

#### - Toughened UV protected glass door

- 1 Humidity control water tank
- 100% CFC/HFC free
- Black cabinet interior and exterior
- Recessed for fitting furniture plinth
- Air ventilation through plinth grille

#### Wi3124 UNIQUE FEATURES

- Black glass doors with gloss black door frame
- Supplied with stainless steel universal plinth grille w:230mm

#### Wi3123 UNIQUE FEATURES

- One piece stainless steel door
- Supplied with both stainless steel universal plinth grille w:23mm and full width grille

#### CAPACITY

- 1.98 Cu Ft/56 Litre total net capacity
- 2.33 Cu ft/66 Litre total gross capacity
- Stores max.19 Bordeaux style wine bottles 750ml
   Bottle stacking diagrams available at caple.co.uk

#### **OPTIONAL EXTRAS**

- 3 Frosted glass shelves with black plastic trim [GSHELFPACK/300]
- Full height stainless steel grille with fixing brackets [GRILL/CLASS301]
- Alternative black-spot bar handle [HANDLE3]
- Alternative curved handle [HANDLE4]
- Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.252]

ī∂1

190

COOLING

# SENSE UNDERCOUNTER SINGLE ZONE WINE CABINET



#### PRODUCT CODE Wi3122WH

#### DIMENSIONS

→ w:295mm

#### PERFORMANCE

Energy Class B
 Energy consumption
 190kWh/yr
 Ambient temperature
 16°C-32°C
 Temperature range
 5°C-18°C
 Humidity range >65%RH
 Quiet operation 43dB[A]

#### FINISH AVAILABLE

White Glass

#### FEATURES

- No-frost compressor cooling technology maintains a consistent temperature
- Single temperature zone stores red, white or sparkling wine
- Electronic temperature control and LED display
- Converts into a can chiller using optional glass shelving
- UV/heat-free white LED lighting [switchable]
- Vibration free
- Adjustable height to fit 100-150mm plinth
- White glass door with gloss white door frame
- Supplied with both stainless steel square handle and black-spot bar handle
- Stainless steel fronted beech shelves

- Fan circulated cool air for even temperature distribution
- Reversible door
- 5 Sliding shelves and 1 base shelf
- Toughened UV protected glass door
- 1 Humidity control water tank
- 100% CFC/HFC free
- Black cabinet interior and exterior
- Recessed for fitting furniture plinth
- Air ventilation through plinth grille
- Supplied with stainless steel universal plinth grille w:230mm

- CAPACITY - 2.12 Cu Ft/60 Litre
- total net capacity - 2.33 Cu ft/66 Litre
- total gross capacity
- Stores max.19 Bordeaux style wine bottles 750ml
   Bottle stacking diagrams available at caple.co.uk

#### OPTIONAL EXTRAS

- 3 Frosted glass shelves with black plastic trim [GSHELFPACK/300]
- Full height stainless steel grille with fixing brackets [GRILL/CLASS301]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.252]



#### SENSE AND CLASSIC UNDERCOUNTER SINGLE ZONE WINE CABINETS



Wi154



Wi155

#### PRODUCT CODE

Black Glass Wi154 Stainless Steel Wi155

#### DIMENSIONS

w:145mm

#### PERFORMANCE

Energy Class B е Energy consumption 185kWh/yr Ambient temperature 16°C-32°C Temperature range 5°C-18°C Humidity range >65%RH Quiet operation 44dB[A]

#### FINISH AVAILABLE

#### Black Glass

Stainless Steel

#### FEATURES

- No-frost compressor cooling technology maintains a consistent temperature
- Single temperature zone stores red, white or sparkling wine
- Electronic temperature control and LED display
- UV/heat-free white LED lighting [switchable]
- Vibration free
- Black glass door with gloss black door frame
  - Fan circulated cool air for even temperature distribution
  - Reversible door
  - 6 Black wire shelves and 1 base shelf
  - 100% CFC/HFC free
  - Toughened UV protected glass door
  - Black cabinet interior and exterior
  - Electronic tempersture control and LED display
  - Air ventilation through plinth grille

#### WI154 UNIQUE **FEATURES**

- Black glass door with gloss black door frame
- Stainless steel black-spot bar handle

#### Wi155 UNIOUE **FEATURES**

- One piece stainless steel door
- Curved stainless steel handle

#### CAPACITY

- 0.67 Cu ft/19 Litre total net capacity
- 0.78 Cu ft/22 Litre total gross capacity
- Stores max. 7 Bordeaux style wine bottles 750ml
- Not suitable for some champagne bottles Bottle stacking diagrams available at caple.co.uk

#### OPTIONAL EXTRAS

- Sense square stainless steel handle [HANDLE8]
- Classic square stainless steel handle [HANDLE7]
  - Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.252]

WINE CABINETS

COOLING

192

193

#### SENSE AND CLASSIC IN-COLUMN TRIPLE ZONE WINE CABINETS



WC1795



#### PRODUCT CODE

Black Glass	WC1795
Stainless Steel	WC1791

#### DIMENSIONS

h:1788mm

#### FINISH AVAILABLE

Black Glass

Stainless Steel

#### PERFORMANCE

e Energy Class B Energy consumption 216kWh/yr Ambient temperature 16°C-32°C Temperature range upper zone 5°C-18°C, middle zone 5°C-10°C, lower zone 10°C-18°C Humidity range >65%RH Quiet operation 45dB[A]

#### FEATURES

- No-frost compressor cooling technology maintains a consistent temperature
- Triple stacked temperature zones for red, white and sparkling wine independently controlled
- Electronic temperature control and LED display
- Fan circulated cool air for even temperature distribution
- UV/heat-free white LED lighting [switchable]
- Vibration free
- Black glass door with black gloss frame
- Black cabinet interior and stainless steel back panel
- Square stainless steel handle
- Telescopic beech shelves
- High temperature alarm
- 2 Heaters raise internal temperature when external temperature drops
- Reversible door

### - Upper zone has 2 sliding shelves and 1 display shelf

- Middle zone has 3 sliding shelves and 1 display shelf
- Lower zone has 3 sliding shelves and 1 base shelf
- Double stacked shelves
- 100% CFC/HFC free
- Toughened UV protected glass door
- 3 Humidity control water tanks
- Supplied with stainless steel universal plinth grille w:525mm
- Air ventilation through plinth grille

#### WC1795 UNIQUE FEATURES

- Black glass doors with gloss black door frame
- Supplied with both square and curved stainless steel handle

#### WC1791 UNIQUE FEATURES

- One piece stainless steel doors
- Square stainless steel handle

#### CAPACITY

- 8.69 Cu ft/246 Litre total net capacity
- 10.14 Cu ft/287 Litre total gross capacity
- Stores max. 89 Bordeaux style wine bottles 750ml
   [29 bottles on upper zone, 25 bottles on middle zone and 35 bottles on lower zone]
   Bottle stacking diagrams available at caple.co.uk

#### OPTIONAL EXTRAS

- Alternative black-spot handle [HANDLE3]
- Curved stainless steel handle [HANDLE4]
- Sense square stainless steel handle [HANDLE8]
- Classic square black handle [HANDLE7BK]
- Classic square stainless steel handle [HANDLE7]

Visit caple.co.uk for full range

#### INSTALLATION

- Diagram [p.253]

#### Features

#### **TELESCOPIC SHELVES**

The easy-slide beech shelves are non-scratch so they won't damage bottle labels. If champagne is your drink of choice, the slatted design allows you to store larger bottles so you're prepared for any special occasion.



#### SENSE AND CLASSIC IN-COLUMN DUAL ZONE WINE CABINETS



WC6520

#### PRODUCT CODE

Black Glass WC6520 Stainless Steel WC6510

#### DIMENSIONS

h:886mm

#### PERFORMANCE

Energy Class B
 Energy consumption
 198kWh/yr
 Ambient temperature
 16°C-32°C
 Temperature range
 upper zone 5°C-10°C,
 lower zone 10°C-18°C
 Humidity range >65%RH
 Quiet operation 45dB[A]

#### FINISH AVAILABLE

Black Glass

Stainless Steel

#### FEATURES

- No-frost compressor cooling technology maintains a
- consistent temperature
   Dual stacked temperature zones, independently controlled [upper zone serve, lower zone storage]
- Touch controls and LED display
- UV/heat-free white LED lighting [switchable]
- Vibration free
- Black glass door with gloss black door frame
- Stainless steel square handle
- Beech shelves
- Fan circulated cool air for even temperature distribution
- Heater raises internal temperature when external temperature drops
- Reversible door
- Upper zone has
   3 sliding shelves
- Lower zone has 3 sliding shelves and 1 sliding base shelf

WC6510

- 100% CFC/HFC free
- Toughened UV protected glass door
- 2 Humidity control water tanks
- Black cabinet interior and exterior
- Audible door alarm when left open

#### WC6520 UNIQUE FEATURE

- Black glass doors with gloss black door frame

#### WC6510 UNIQUE FEATURES

- One piece stainless steel door

#### CAPACITY

- 4.13 Cu ft/117.1 Litre total net capacity
- 4.94 Cu ft/140.1 Litre total gross capacity
- Stores max. 41 Bordeaux style wine bottles 750ml [18 white bottles on upper zone, and 23 red bottles on lower zone]
   Bottle stacking diagrams available at caple.co.uk

#### INSTALLATION

- Diagram [p.253]







#### CLASSIC IN-COLUMN SINGLE ZONE WINE CABINET

#### PRODUCT CODE

#### FEA

WC6500

#### DIMENSIONS

h:886mm

#### FINISH AVAILABLE

Stainless Steel

#### PERFORMANCE

e Energy Class A Energy consumption 146kWh/yr Ambient temperature 16°C-32°C Temperature range 5°C-18°C Humidity range >65%RH Quiet operation 45dB[A]

#### FEATURES

- No-frost compressor cooling technology maintains a consistent temperature
- Single temperature zone stores red, white or sparkling wineTouch control and LED display
- UV/heat-free white LED lighting [switchable]
- Vibration free
- One piece stainless steel door
- Black cabinet interior and exterior
- Stainless steel square handle
- Beech shelves
- Fan circulated cool air for even temperature distribution
- Reversible door
- 7 Sliding shelves and 1 base shelf
- 100% CFC/HFC free
- Toughened UV protected glass door
- 1 Humidity control water tank
- Audible door alarm when left open

#### CAPACITY

- 4.38 Cu ft/124 Litre total net capacity
- 5.41 Cu ft/153 Litre total gross capacity
- Stores max. 47 Bordeaux style wine bottles 750ml
   Bottle stacking diagrams available at caple.co.uk

#### INSTALLATION

- Diagram [p.253]

196 197 WINE CABINETS

#### SENSE AND CLASSIC IN-COLUMN SINGLE ZONE WINE CABINETS



WC6410

#### PRODUCT CODE

Black Glass	WC6410
Stainless Steel	WC6400

#### DIMENSIONS

 $\leftrightarrow$ h:455mm

#### FINISH AVAILABLE

Stainless Steel

#### PERFORMANCE

e Energy Class A Energy consumption 139kWh/yr Ambient temperature 16°C-32°C Temperature range 5°C-18°C Humidity range >65%RH Quiet operation 43dB[A]

#### FEATURES

- No-frost compressor cooling technology maintains a consistent temperature
- Single temperature zone for red or white wine
- Touch control and LED display - UV/heat-free white LED
- lighting [switchable] - Vibration free
- Stainless steel square handle
- Beech shelves
- Fan circulated cool air for even temperature distribution
- Reversible door
- 3 Sliding shelves and 1 base shelf
- 100% CFC/HFC free
- Toughened UV protected glass door
- 1 Humidity control water tank
- Audible door alarm when left open

# WC6400

#### WC6410 UNIQUE FEATURES

- Black glass doors with gloss black door frame

#### WC6400 UNIQUE FEATURES

- One piece stainless steel door

#### CAPACITY

- 1.91 Cu ft/54 Litre total net capacity
- 2.08 Cu ft/59 Litre total gross capacity
- Stores max. 21 Bordeaux style wine bottles 750ml Bottle stacking diagrams available at caple.co.uk

#### INSTALLATION

- Diagram [p.253]



# Black Glass



#### SENSE FREESTANDING TRIPLE ZONE WINE CABINET

#### PRODUCT CODE WF1549

#### FEATURES

- No-fros technol

#### DIMENSIONS

 $\leftrightarrow$  h:1762mm

#### FINISH AVAILABLE

Black Glass

е

#### PERFORMANCE

Energy Class C Energy consumption 290kWh/yr Ambient temperature 16°C-32°C Temperature range upper zone 5°C-18°C, middle zone 5°C-12°C, lower zone 12°C-18°C Humidity range >65%RH Quiet operation 45dB[A]

- No-frost compressor cooling
- technology maintains a consistent temperature
- Triple stacked temperature zones for red, white or sparkling wine, independently controlled
- Electronic temperature control and LED display
- UV/heat-free white LED lighting [switchable]
- 100% CFC/HFC free
- Vibration free
- Fan circulated cool air for even temperature distribution
- 2 Heaters raise internal temperature when external temperature drops
- Reversible door
- Upper zone has 1 sliding shelf and 1 display shelf
- Middle zone has 2 sliding shelves and 1 display shelf
- Lower zone has 3 sliding shelves and 1 base shelf

- Toughened UV protected glass door
- 3 Humidity control water tanks
- Door lock
- Air ventilation through plinth grille

#### DESIGN

- Black glass door with gloss black door frame
- Stainless steel, black-spot feature bar handle
- Telescopic shelves
- Black cabinet interior and exterior

#### CAPACITY

- 14.23 Cu ft/404 Litre total net capacity
- 15.86 Cu ft/449 Litre total gross capacity
- Stores max. 132 Bordeaux style wine bottles 750ml
  [43 bottles on upper zone, 45 bottles on middle zone and 44 bottles on lower zone]

#### INSTALLATION

- Diagram [p.254]

# WINE CABINETS

COOLING

198

199



#### CLASSIC FREESTANDING TRIPLE ZONE WINE CABINET

#### PRODUCT CODE

#### FEATURES

WF1548

#### 

 $\leftrightarrow$  h:1762mm

#### PERFORMANCE

Energy Class C
 Energy consumption
 290kWh/yr
 Ambient temperature
 16°C-32°C
 Temperature range
 upper zone 5°C-18°C,
 middle zone 5°C-12°C,
 lower zone 12°C-18°C
 Humidity range >65%RH
 Quiet operation 45dB[A]

#### FINISH AVAILABLE

Stainless Steel

- -
- No-frost compressor cooling technology maintains a consistent temperature
- Triple stacked temperature zones for red, white or sparkling wine, independently controlled
- Electronic temperature control and LED display
- UV/heat-free white LED lighting [switchable]
- 100% CFC/HFC free
- Vibration free
- Fan circulated cool air for even temperature distribution
- 2 Heaters raise internal temperature when external temperature drops
- Reversible door
- Upper zone has 1 sliding shelf and 1 display shelf
- Middle zone has 2 sliding shelves and 1 display shelf
- Lower zone has 3 sliding shelves and 1 base shelf

- Toughened UV protected glass door
- 3 Humidity control water tanks
- Door lock - Air ventilation through
- stainless steel plinth grille

#### DESIGN

- One piece stainless steel door
- Stainless steel fronted telescopic beech shelves
- Curved stainless steel handle
- Black cabinet interior and exterior

#### CAPACITY

- 14.23 Cu ft/404 Litre total net capacity
- 15.86 Cu ft/449 Litre total gross capacity
- Stores max. 132 Bordeaux style wine bottles 750ml
   [43 bottles on upper zone, 45 bottles on middle zone and 44 bottles on lower zone]

#### INSTALLATION

- Diagram [p.254]



#### **CLASSIC FREESTANDING** SINGLE ZONE WINE CABINET

#### PRODUCT CODE

#### FEATURES

WF333

#### DIMENSIONS

 $\leftrightarrow$  h:840mm

#### PERFORMANCE

e Energy Class A Energy consumption 144kWh/yr Temperature range 5°C-18°C Ambient temperature 16°C-32°C Humidity range >65%RH Quiet operation 44dB[A]

#### FINISH AVAILABLE

Stainless Steel

- No-frost compressor cooling technology maintains a consistent temperature
- Single temperature zone for red or white wine
- Electronic temperature control and LED display
- Interior light
- 100% CFC/HFC free
- 3 Full shelves and 1 half shelf
- Toughened UV protected glass door
- 1 Humidity control water tank
- Reversible door
- Top and side heat dispersion

#### DESIGN

- One piece stainless steel door
- Curved stainless steel handle
- Stainless steel fronted telescopic beech shelves
- Black cabinet interior and exterior

#### CAPACITY

- 4.39 Cu ft/124 Litre total net capacity
- 4.87 Cu ft/138 Litre total gross capacity
- Stores max. 39 Bordeaux style wine bottles 750ml [6 bottles on top shelf, 12 bottles double stacked on middle two shelves and 9 bottles double stacked on the bottom shelf]

#### INSTALLATION

- Diagram [p.254]



# WASHING

Dishwashers	206
Washing Machines	216
Washer Dryer	218
Tumble Dryers	220

Gope

202

203



## Taking the chore out of washing

Who says that functional objects can't look fantastic? That's why we've designed our dishwasher and laundry appliances with an eagle eye on performance and style

Caple is renowned for ultra stylish looks, hi-tech and all-round ease of use. With fast, efficient clothes washing and drying and sparkling clean dishes, our appliances will always get the job done beautifully with minimal effort.

#### WASH HOWEVER YOU WISH

Our range of washing appliances gives you all the options you need to fit in with your kitchen and your budget. What's on your wish list? An appliance that makes the most of minimal space? One that can cope with a large family? Or super stylish looks? We tick all your boxes.



Our dishwashers are exceptionally versatile, using clever technology to deal with any type of load. Our washing machines and washer dryers make light work of all your laundry needs with features like allergy care, stain reduction and extra large doors. What's more, Caple tumble dryers can be kept neatly behind furniture doors for a flawless finish.



# Dishwashers

Our machines don't just leave your dishes sparkling, they also come with at least an A+' rating for energy and A for wash and drying performance. WASHING

# PERFORMANCE WITH SHINE

Whether it's a quick wash or something more heavy-duty, every Caple dishwasher is designed to perform well. All models are fully integrated to tuck away behind your kitchen doors and are at least A+ energy rated, with the top of the range model now an amazing A+++.



#### WATER CONSUMPTION

The entire range has low water consumption figures, which is not only great for the environment but your pocket also. The Auto Wash programme on the Di491 uses an astonishingly low 8 litres of water.



#### POWER WASH AND AUTO WASH

Exclusive to the Di651. Power Wash, when used with either intensive, normal, economy, glass and one hour express programmes, helps break through heavily soiled loads by increasing washing temperature and duration.

Auto wash on Di651 and Di491 have sensors checking the level of cleanliness of the load, saving you time, energy and water.



#### ADJUSTABLE UPPER BASKET

Look out of for models with adjustable upper basket. You can change the height of the upper basket [even with full loads] with the simple release of two conveniently placed levers.



#### ALTERNATIVE WASH

Available on a selection of models the alternative wash allows you to select either the upper or lower baskets for the load. You'll save water and energy with smaller loads.



INTERNAL LED LIGHT

Activated when the door is opened, it illuminates the inside.

#### REDUCE YOUR WATER AND ENERGY USAGE

The Half Load function on our models is ideally suited to small loads, unlike traditional Half Load programmes [which usually only use one basket] reducing energy and water use.



#### **DELAY TIMER**

Allows you to delay the start time for between 1-24 hours.

#### AQUASTOP

Automatically cuts off the water at the first sign of a leak, helping to avoid costly water damage.

# WASHING

208

#### Features

#### FLEXIBLE CUTLERY TRAY

Why not opt for an adjustable cutlery tray. The tray sits at the top of the dishwasher freeing up more space in the lower basket. On the 600mm models

you can choose from five set-up options, [shown below] depending on what is in the basket below.





#### FULLY INTEGRATED DISHWASHER



#### PRODUCT CODE Di651

#### DIMENSIONS

 $\leftrightarrow$ w:600mm

#### PERFORMANCE

e Energy Class A+++ Wash Class A Drying performance A Max. noise level 40dB[A] Annual energy consumption 241kWh/yr Annual water consumption 2800 Litres Water consumption

[economy] from 10 Litres Energy consumption per cycle [economy] 0.84kWH

#### FINISH AVAILABLE

Stainless steel control panel with LCD display

#### PROGRAMMES

Programmes \*Normal/55°C \*Intensive/60°C \*Economy/45°C 90min express/65°C Auto/45-55°C Glass/40°C Rapid/45°C

#### FUNCTIONS

- Express wash

- Extra drying / Turbo drying
- Power wash
- Alternative wash
- Delayed timer 1-24hr

#### FEATURES


- 15 Place settings
- Max. plate diameter 30cm - Stainless steel inner door
- and interior - Stainless steel direct touch
- control panel
- Programme status light
- Internal light - Top cutlery tray
- Titanium grey baskets
- Electronic salt and rinse aid warning light
- Cold water connection
- 3 spray levels
- Hidden heating element
- Easy adjustable upper basket
- Sliding door dispenser
- Easy clean filter system
- 6 Level water softening system
- Water overflow
- protection system
- Aquastop

#### INSTALLATION

- Diagram [p.255]
- Voltage 220-240V
- Rated load 1.93kW
- Fuse rating 10A

#### Features

Due to the whisper quiet nature of the Di651, this appliance has a convenient programme status light [shown below] projecting onto the floor during the cycle. This light turns off when complete.



Easy adjustable upper basket.



# WASHING

2IO

#### FULLY INTEGRATED DISHWASHER



#### PRODUCT CODE Di641

DIMENSIONS

#### PERFORMANCE

е

Energy Class A++ Wash Class A Drying performance A Max. noise level 47dB Annual energy consumption 266kWh/yr Annual water consumption 2800 Litres Water consumption [economy] 10 Litres

#### FINISH AVAILABLE

Stainless steel control panel with electronic display

#### PROGRAMMES

Programmes Normal/55°C Intensive/65°C Economy/45°C 90min express/60°C Glass/40°C Rapid/40°C Soak

#### FUNCTIONS

- Delayed timer 1-24hr
- Half load

#### FEATURES

- 14 Place settings
- Max. plate diameter 30cmStainless steel inner door
- and interior - Top cutlery tray
- Titanium grey baskets
- Cold water connection
- Hidden heating element
- Easy adjustable upper basket
- Easy clean filter system
- Electronic salt and rinse aid warning light
- 6 Level water softening system
- Water overflow protection system
- Aquastop

#### INSTALLATION

- Diagram [p.255]
- Voltage 230V
- Rated load 1.93kW
- Fuse rating 13A

#### FULLY INTEGRATED DISHWASHER



#### FUNCTIONS

- Delay timer 3, 6 or 9hrs

#### FEATURES

- 12 Place settings
- Max. plate diameter 30cm
- Stainless steel inner door and interior
- Titanium grey baskets
- Salt and rinse aid warning light
- Cold water connection
- Hidden heating element
- Adjustable upper basket
- Easy clean filter system
- 6 Level water softening system
- Water overflow protection system

#### INSTALLATION

- Diagram [p.255]
- Voltage 230V
- Rated load 1.93kW
- Fuse rating 13A

#### PROGRAMMES

PRODUCT CODE

DIMENSIONS

w:600mm

PERFORMANCE

Energy Class A++

Drying performance A

Max. noise level 49dB

consumption 258kWh/yr

consumption 3080 Litres

Water consumption

[economy] 11 Litres

Energy consumption

per cycle [economy]

Black gloss door top

0.91kWh

FINISH AVAILABLE

control panel

Wash Class A

Annual energy

Annual water

Di631

 $\leftrightarrow$ 

е



#### FULLY INTEGRATED DISHWASHER

#### FULLY INTEGRATED DISHWASHER



#### PRODUCT CODE Di491

#### DIMENSIONS $\leftrightarrow$ w:450mm

е

#### PERFORMANCE

Energy Class A+++ Wash Class A Drying performance A Max. noise level 42dB Annual energy consumption 188kWh/yr Annual water consumption 2240 Litres Water consumption [economy] 8 Litres Energy consumption per cycle [economy] 0.66kWh

#### FINISH AVAILABLE

Stainless steel control panel with LED display

#### PROGRAMMES

8 Programmes Auto/45-55°C Normal/55°C Intensive/60°C Economy/45°C 90min/65°C Glass/40°C Rapid/45°C Pre-wash

#### FUNCTIONS

- Delayed timer 1-24hr
- Alternative wash
- Extra drying
- Extra wash
- Power wash
- Energy saving mode

#### FEATURES

- 10 Place settings
- Max. plate diameter 30cm - Stainless steel inner door and interior
- Internal light
- Top cutlery tray
- Titanium grey baskets
- Cold water connection
- Hidden heating element
- Easy adjustable upper
- basket - Easy clean filter system
- Electronic salt and rinse aid warning light
- 6 Level water softening system
- Water overflow protection system
- Aquastop

#### INSTALLATION

- Diagram [p.255]
- Voltage 220-240V
- Rated load 2.1kW
- Fuse rating 10A



#### FUNCTIONS

- Delayed timer 3, 6 or 9hrs

#### **FEATURES**

- 9 Place settings
- Max. plate diameter 30cm
  - Stainless steel inner door and interior
  - Titanium grey baskets
- Salt and rinse aid warning light
- Cold water connection
- Adjustable upper basket
- Easy clean filter system
- 6 Level water
- softening system
- Water overflow protection system

#### INSTALLATION

- Diagram [p.255]
- Voltage 230V
- Rated load 1.93kW
- Fuse rating 13A
- PROGRAMMES Programmes Normal/55°C
  - Intensive/65°C Economy/50°C 1 Hour express/60°C Rapid/40°C

WASHING

- Hidden heating element

- DISHWASHERS





Max. noise level 49dB

consumption 197kWh/yr

Energy consumption per

consumption 2520 Litres

cycle 0.74kWh/cycle

Water consumption

[economy] 9 Litres

Black gloss door top

Annual energy

Annual water

FINISH AVAILABLE

control panel

5

PRODUCT CODE

Di481



# Laundry

A reliable washing machine and tumble dryer is an absolute must for any family. We've taken things further, with a range that's packed with features, good looks and performance. 214 215 WASHING MACHINES

WASHING

# WASHING MACHINES

Choose from a selection of integrated machines that tuck neatly away. Whichever you opt for, you can be sure it will do the job in style. All our machines use the most advanced technology to make laundry day just that bit easier.

#### **DIGITAL DISPLAY**

Included on all models. Shows the programme phase, spin speed and any extra functions selected.

#### EXTRA LARGE DOORS

Makes loading and unloading much easier.

#### MY CYCLE

Create and easily access your most frequently used programme.

## SUPERIOR FABRIC PROTECTION

The new Caple Diamond+ Drum offers superior fabric protection, allowing clothes to gently glide across the surface preventing rips, laddering and pilling.









#### **ELECTRONIC WASHING MACHINE**



PRODUCT CODE WMi3005

#### DIMENSIONS

 $\leftrightarrow$ w:600mm

#### PERFORMANCE

e Energy Class A+++ Wash Class A Spin efficiency B 1400rpm max. spin speed 11000 Litre annual water consumption Est. annual energy consumption 196kWh/yr Max. noise level wash 57dB, spin 76dB

#### FINISH AVAILABLE

White

#### PROGRAMMES

16 Programmes Cotton Intensive Cotton 60°C Cotton 40°C Cotton 20°C 15min Ouick wash Eco Rinse Baby care Sports Synthetic

- Mixed Delicate Wool Drain Spin My Cycle
- Options
- Delay timer [up to 24hrs] Pause Intense Spin speed selection Temperature selection Pre wash Extra rinse

#### FEATURES

- Cold fill - 15 minute fast wash
- Digital display
- 310mm extra large door
- Door safety lock
- Programme time remaining
- Variable spin speed - Stainless steel
- Diamond+ drum
- Anti-overflow protection
- Foam control

#### CAPACITY

- 8kg washing capacity

#### INSTALLATION

- Diagram [p.255]
- Rated load 2.0kW
- Fuse rating 10A

#### **ELECTRONIC WASHING MACHINE**



#### PRODUCT CODE

WMi3000

#### DIMENSIONS

w:600mm

#### PERFORMANCE

e Energy Class A++ Wash Class A Spin efficiency B 1200rpm max. spin speed 9240 Litre annual water consumption Est. annual energy consumption 173kWh/yr Max. noise level wash 57dB, spin 74dB

#### FINISH AVAILABLE

White

#### PROGRAMMES

#### 16 Programmes Cotton Intensive Cotton 60°C

Cotton 40°C Cotton 20°C 15min Quick wash Eco Rinse Baby care Sports

Synthetic

Mixed Delicate Wool Drain Spin My Cycle

7

#### Options

Delay timer [up to 24hrs] Pause Intense Spin selection Temperature selection Pre wash Extra rinse

#### FEATURES

- Cold fill
- 15mins fast wash
- Digital display
- 300mm extra large door
- Door safety lock
- Programme time remaining
- Variable spin speed
- Stainless steel Diamond+ drum
- Anti-overflow protection
- Foam control

#### CAPACITY

- 6kg washing capacity

#### INSTALLATION

- Diagram [p.255]
- Rated load 2.0kW
- Fuse rating 10A

216

217

WASHING MACHINES

## WASHER DRYER

Our integrated washer dryer offers multiple programmes that are easy to operate, meeting all your laundry needs with minimal fuss.

## ELECTRONIC CONTROLS

Simple controls mean you can change between options at the click of a button.

#### DOOR SAFETY LOCK

Our machine operates at high temperatures during mid-cycle. The door will remain locked until the clothes cool 53°C.

#### **STAIN REDUCTION**

Uses advanced technology to maximise cleaning action, keeping your whites looking fresher for longer.





#### **ELECTRONIC CONDENSER** WASHER DRYER



#### PRODUCT CODE WDi3300

#### DIMENSIONS



#### PERFORMANCE

e Energy Class A Wash Class A Spin efficiency A 1400rpm max. spin speed 152 Litre water consumption [wash and dry cycle] Est. energy to wash and dry full load 5.44kWh Max. noise level wash 54dB, spin 78dB, dry 62dB

#### FINISH AVAILABLE

White

#### PROGRAMMES

16 Programmes Fast wash 15mins Cotton Cotton Eco Synthetic Wool Delicate Baby care Sports Colours Jeans 1hour wash & dry Mixed

#### Drain Spin Dry Personalised

#### 5 Options

Delay timer [24hrs] Pause Spin selection Temperature selection Damp dry

#### FEATURES

- Final cool down tumble
- Cold fill
- 15 Minute fast wash
- White LED display
- Electronic controls
- 310mm extra large door
- Door safety lock
- Programme time remaining
- Variable spin speed
- Automatic variable load
- Stainless steel drum
- Anti-overflow protection
- Pause function
- 1.5m power cord

#### CAPACITY

- 8kg washing, 6kg drying

#### INSTALLATION

- Diagram [p.255]
- Rated load 1.9kW
- Fuse rating 10A

# 218

219

## TUMBLE DRYERS

Caple tumble dryers use state-of-the art technology to make every task effortless.



Our fully integrated tumble dryers offer two heat settings and a venting system for the best possible performance. The TDi111 also has sensors in the drum that constantly check moisture levels, so the machine only stops when clothes are completely dry. Other handy features include a reverse tumble action, six levels of dryness and an easy-access fluff filter.

## FULLY INTEGRATED SENSOR VENTED TUMBLE DRYER



#### PRODUCT CODE TDi111

#### DIMENSIONS

 $\leftrightarrow$  w:600mm

#### PERFORMANCE

e Energy Class C Est. annual energy consumption 519kWh/yr Average energy by cycle 4.39kWh Max. noise level 62dB

### FINISH AVAILABLE

#### OPTIONS

6 Sensor drying levels Extra dry Cupboard dry Mid dry Extra iron dry Iron dry Damp dry

#### FEATURES

- Vented drying
- 2 Heat settings
- 30 minute timed drying with heat
- 30 minute refresh
- Reverse tumble action
- Final cool down tumble
- Easy access fluff filter
- Rear vented only
- Integral extendable 2.4m hose and wall outlet
- Reversible appliance and furniture door
  Adjustable legs

#### \_\_\_\_\_

- CAPACITY
- 7kg drying capacity

#### INSTALLATION

- Diagram [p.255]
- Electrical connection
- Rated load 2.7kW
- Fuse rating 13A

## FULLY INTEGRATED VENTED TUMBLE DRYER



#### PRODUCT CODE TDi101

#### DIMENSIONS

w:600mm

#### PERFORMANCE



Energy Class C Est. annual energy consumption 459kWh/yr Max. noise level 62dB

#### FINISH AVAILABLE

White

#### FEATURES

- Vented drying
- 2 Heat settings
- Reverse tumble action
- Final cool down tumble
- Easy access fluff filter
- Rear vented only
- Integral extendable 2.4m hose and wall outlet
- Reversible appliance and furniture door
- Adjustable legs

#### CAPACITY

6kg drying capacity

#### INSTALLATION

- Diagram [p.255]
- Electrical connection
- Rated load 2.7kW
- Fuse rating 13A



220

WASHING

## PLINTH HEATERS



#### PRODUCT CODE PH500H

#### DIMENSIONS

Grille: 495 x 100mm Heater: 320 x 400mm [including pipe work] Plinth cut out: 360 x 96mm

#### FUNCTIONS

- 500mm hydronic plinth heater [central heating]
- Stainless steel grille
- 2 speed fan
- Summer setting [fan circulates air round the room]
- Up to 24% more efficient than standard radiators
- Auto switch on
- Easy install
- Low noise

#### CONNECTIONS

- Fuse rating: 3ampVoltage: 220-240 / 50hz
- Heat output: 3057 3979 Btu [0.9 - 1.17kW]
- Maximum working pressure: 8bar [1Mpa]

#### OPTIONAL EXTRAS

- White plinth grille available [PHHGRILL/WH]

Visit caple.co.uk for full range



#### PRODUCT CODE PH501E

- DIMENSIONS
- Grille: 495 x 100mm Heater: 320 x 200mm Plinth cut out: 360 x 96mm

#### FUNCTIONS

- 500mm electric plinth heater
- Stainless steel grille
- 2 speed fan
- Easy install
- Low noise

#### FEATURES

- Wall thermostat included

#### CONNECTIONS

- Fuse rating: 10amp
- Voltage: 220-240 / 50hz
- Heat output: 940 -1990w

#### OPTIONAL EXTRAS

- White plinth grille available [PHHGRILL/WH] Visit caple.co.uk for full range

Features

#### WHITE GRILLE

Optional extra plinth grille finished in white. PHEGRILLIWH

PHHGRILL/WH





222

PLINTH HEATER

## FOOD WASTE DISPOSAL

A waste disposer hidden away under the sink can help you recycle your food scraps and leftovers like potato peelings, chicken bones, egg shells and tea bags. It's clean, it's green and it leaves less to clutter up your bin. It also reduces any decomposing food odours.



It couldn't be easier or more convenient to use. Simply turn on the cold tap and the disposer then empty everything into the sink. The disposer grinds the food waste into fine particles and flushes the waste away down the drain.



Since more than 25% of household refuse is food, that means much less rubbish to take away and clog up our landfill sites. It also means a reduction in the amount of greenhouse gases emitted. Waste from your disposer can actually be recycled into a soil conditioner once it reaches the water treatment plant, so you will be making a positive contribution to your environment.

#### FOOD WASTE DISPOSAL UNITS







## WASHING

224

225

#### PRODUCT CODE

WDU050

#### DIMENSIONS

w:175mm d:175mm h:372mm

#### FEATURES

- 0.5hp waste disposal unit
- Continuous feed
- High speed magnet motor
- Overload protection
- Corrosion resistant 3 stage grinding system
- Easy mount installation
- Sound insulation
- 2 Year guarantee - Suitable for air switch [WDUAIR - see opposite]

#### **OPTIONAL EXTRAS**

- Air switch [WDUAIR] for WDU050 only
- Basket strainer waste decorative cover [CWC2] Visit caple.co.uk for full range

#### PRODUCT CODE WDU075



h:400mm

#### FEATURES

- 0.75hp waste disposal unit
- Continuous feed
- High speed magnet motor - Overload protection
- Corrosion resistant 3 stage
- grinding system - Easy mount installation
- Sound insulation
- 2 Year guarantee
- Air switch [WDUAIR] included

#### OPTIONAL EXTRAS

- Basket strainer waste decorative cover [CWC2] Visit caple.co.uk for full range

#### PRODUCT CODE WDU100



h:437mm

#### FEATURES

- 1.0hp waste disposal unit
- Continuous feed
- High speed magnet motor
- Overload protection
- Corrosion resistant 3 stage grinding system
- Easy mount installation
- Sound insulation
- 3 Year guarantee
- Air switch [WDUAIR] included

#### **OPTIONAL EXTRAS**

- Basket strainer waste decorative cover [CWC2] Visit caple.co.uk for full range

#### Features

#### **WDUAIR**

The chrome air switch is an optional extra with the WDU050 and comes as standard with the WDU075 and WDU100.



WDUAIR




# FOOD WASTE DISPOSAL




## INSTALLATION DIAGRAMS

SINGLE OVENS C2481SS

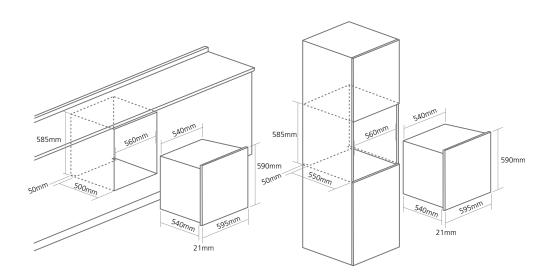


C2151SS / C2150WH

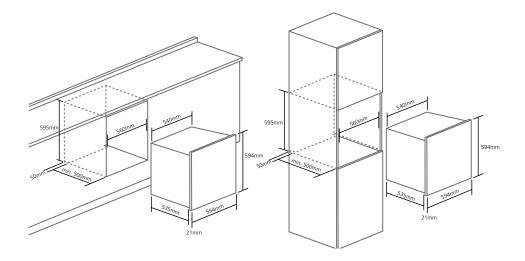


We recommend that when installing a stack or quad of products, a pair of our installation brackets [OVEN/BRACKETS] are purchased to support the upper product ensuring a seamless fit for each appliance when one is on top of the other.

SINGLE OVENS

C2901

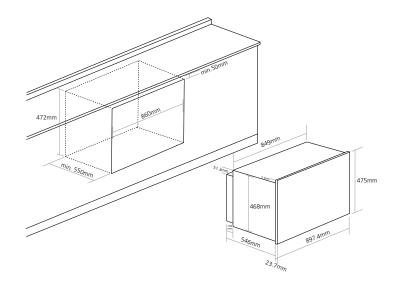


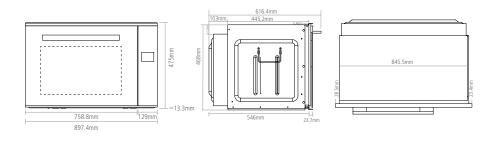

226


227

#### C2401 / C2401GM / C2105 / C2105GM / C2101 / C2362

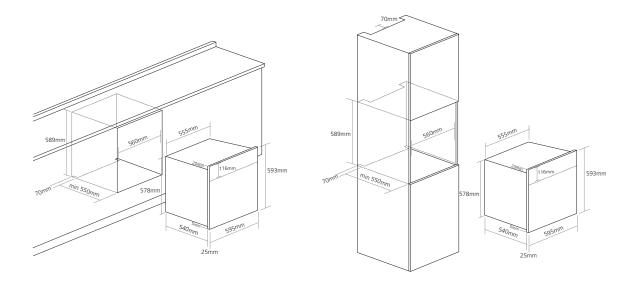


We recommend that when installing a stack or quad of products, a pair of our installation brackets [OVEN/BRACKETS] are purchased to support the upper product ensuring a seamless fit for each appliance when one is on top of the other.

C2238 / C2236 / C2233 / C2233BK / C2230

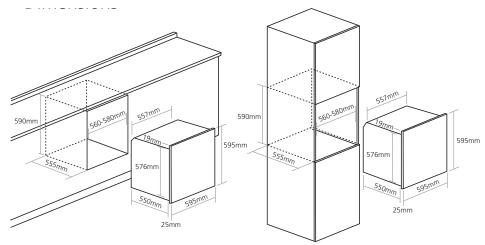




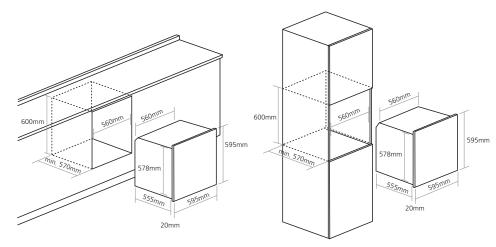

**DOUBLE OVENS** 


**BUILT-UNDER DOUBLE OVENS** 

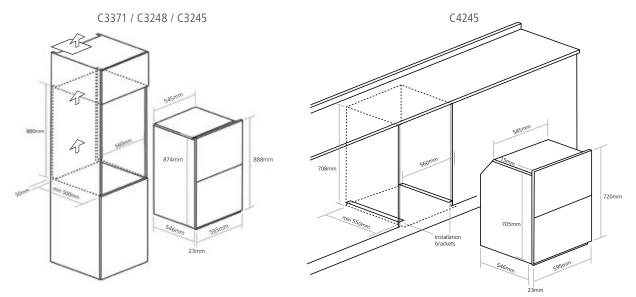


We recommend that when installing a stack or quad of products, a pair of our installation brackets [OVEN/BRACKETS] are purchased to support the upper product ensuring a seamless fit for each appliance when one is on top of the other.

#### **STEAM OVENS**

SO210SS / SO209WH







SO110 / SO110GM

MICROWAVES

CM210SS







CM110 / CM110GM / CM108

228


229








We recommend that when installing a stack or quad of products, a pair of our installation brackets [OVEN/BRACKETS] are purchased to support the upper product ensuring a seamless fit for each appliance when one is on top of the other. MICROWAVES

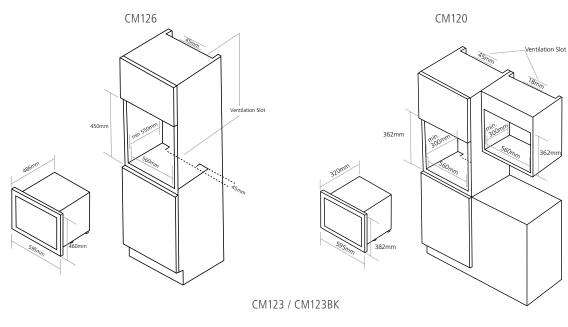




**COFFEE MACHINES** 

CM471WH



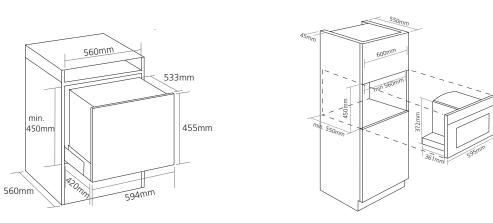



We recommend that when installing a stack or quad of products, a pair of our installation brackets [OVEN/BRACKETS] are purchased to support the upper product ensuring a seamless fit for each appliance when one is on top of the other.

#### WARMING DRAWERS

#### WD140BK / WD140GM


WMD1356 / WMD1355WH





**STORAGE DRAWER** 

SD1356




230 231


#### **INDUCTION HOBS**


C970i

C876i

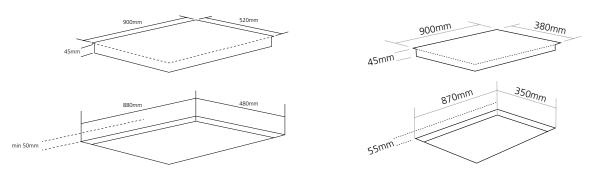



We recommend that when installing a stack or quad of products, a pair of our installation brackets [OVEN/BRACKETS] are purchased to support the upper product ensuring a seamless fit for each appliance when one is on top of the other.

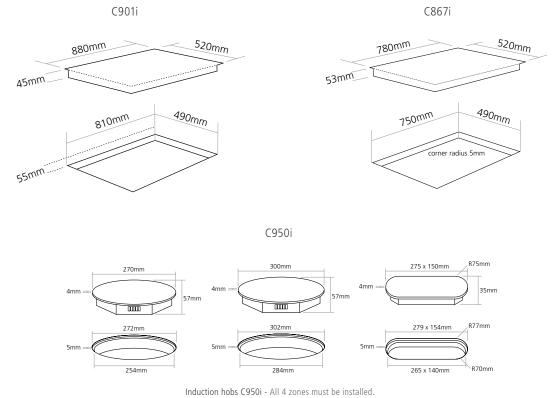




A minimum gap of 20mm is required beneath the hob fans, and a 4mm gap must be left under the worktop at the front of the hob for ventilation.

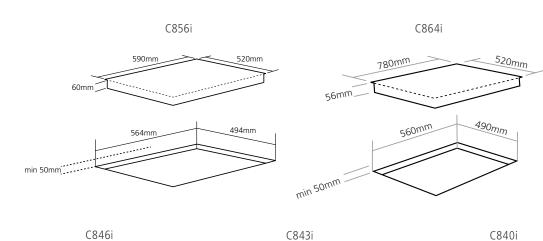

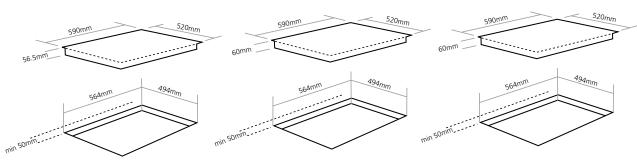


Induction hobs C856i, C864i, C846i, C843i and C840i: A minimum gap of 50mm required beneath the hob fans, and a 5mm gap must be left under the worktop at the front of the hob for ventilation.

#### ELECTRIC HOBS

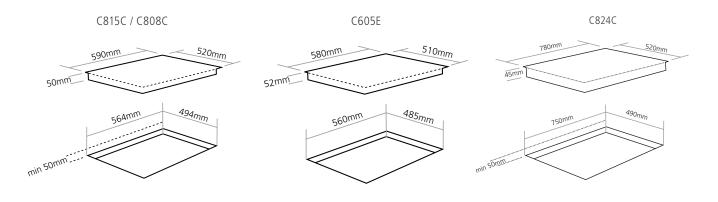



GAS HOBS




C1081G


C871GBK






C789G






C787G


C786G




C769G








C739G




#### GAS HOBS

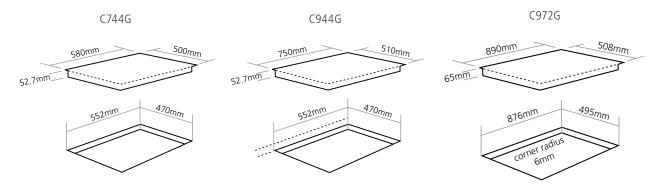

C1072G

C873G


C866G

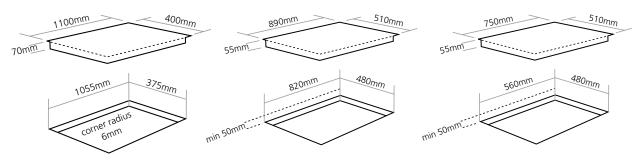

C848G


C774G


C767G

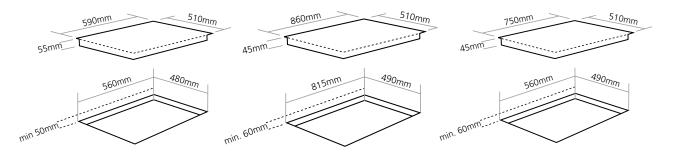


C749G


C706G





#### **MODULAR HOBS**







520mm


504mm

56mm



288mm

272mm




C892C


If installed without a gap in between, cut-out width = [no. of hobs - 1] x 288mm] + 268mm

#### INDUCTION DOWNDRAFT HOB


DD940BK

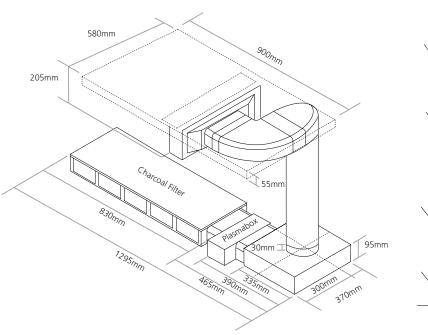


INSTALLATION Example A



Example B




DD935BK

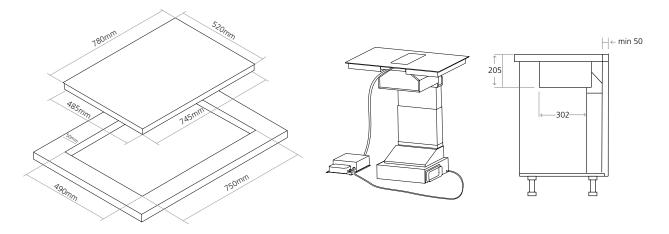


#### **DOWNDRAFT EXTRACTORS**

DD120BK

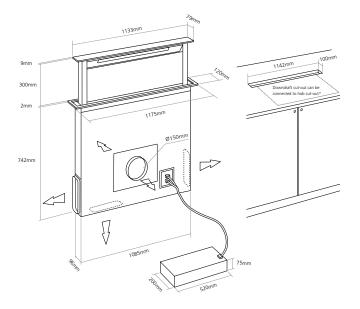

DD925CO




#### INSTALLATION MADE EASY

Minimum cabinet depth depends on orientation, hob type and worktop material. Cabinet base may need to be cut or routered to accommodate height of unit. If positioned behind a hob, minimum cabinet width for DD522/606 extractors is

600mm, for DD903/911/921 allow 900mm and for DD120BK 1200mm is required. If positioned alongside a hob, the cabinet may need to be reinforced to strengthen where the base has been modified.


The hood can be fitted right up to an electric hob [50mm gap required for gas hobs], but always ensure that the independent electronics box in the cupboard below is installed at least 650mm from the heat source.

The hood can be ducted from both sides enabling the downdraft to be positioned behind a hob and under-counter oven.




#### DOWNDRAFT EXTRACTORS

DD911SS / DD911WH / DD911BK




DD901BK

DD522BK




DD606SS / DD606BK




236 237

DD903BK

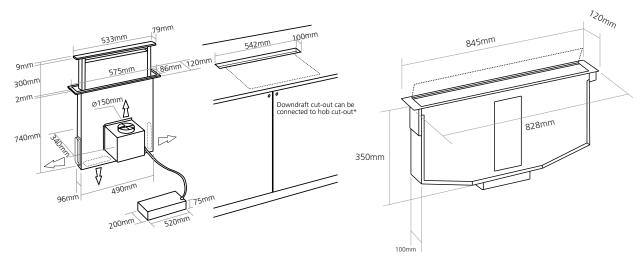

\*For electric hobs only. A 50mm gap is required for gas hobs.

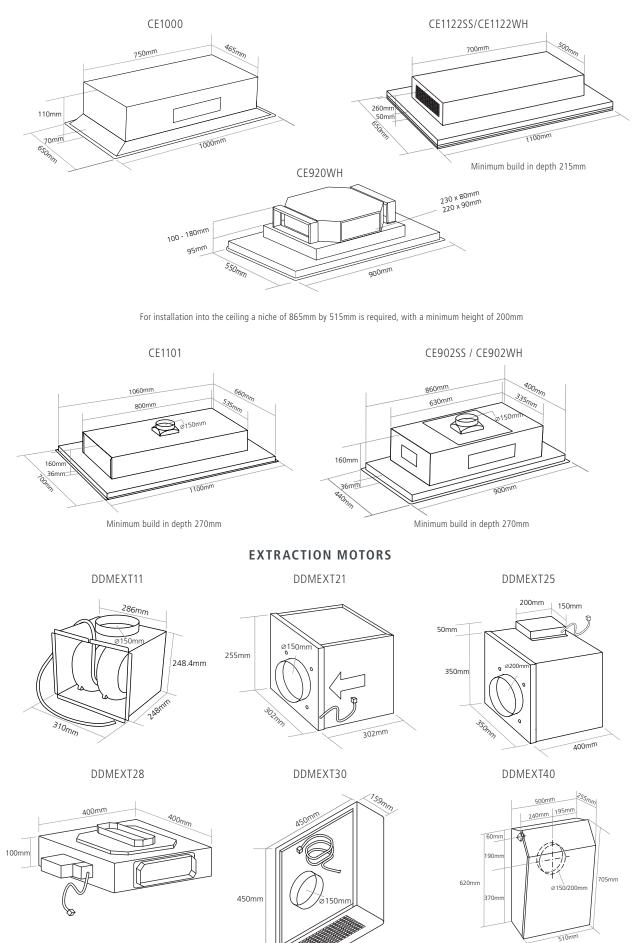


#### **ISLAND HOODS**

CR700 / CR700WH / CR700SL





CR750CO / CR750WH / CR750SL



Pi402


ZAL48SL / ZAL48CO / ZAL48BK








238 239

BXi911












CGi920/RED

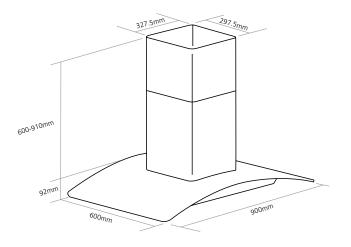

Note: Suitable to be installed in a standard room height of 2.3m


#### WALL CHIMNEY HOODS






#### WALL CHIMNEY HOODS


MOT912




OM600
















SP912BK / SP912SS / SP612BK / SP612SS



650mm space for electric hobs and 760mm space for gas hobs required from worktop to the mesh filter behind the centre glass panel. From the lowest point of the hood the distance required is 450mm for electric hobs and 550mm for gas hobs.

240 241


#### WALL CHIMNEY HOODS





526 -1000mm

FGC920 / FGC720 / FGC620

CGC710BK










CGC911BK / CGC911SS














BXC911 / BXC611

CCH100 / CCH900BK / CCH900SS CCH700 / CCH600BK / CCH600SS






**INTEGRATED HOOD** 




**BUILT UNDER HOODS/CONVENTIONAL HOODS** 

TBU850




242 243


TBU520









#### **BUILT UNDER HOODS/CONVENTIONAL HOODS**







TSCH600








BUCH

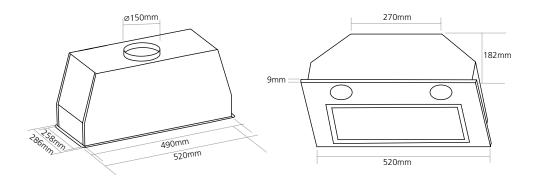


#### PROFESSIONAL REFRIGERATION

CAFF60 FREESTANDING

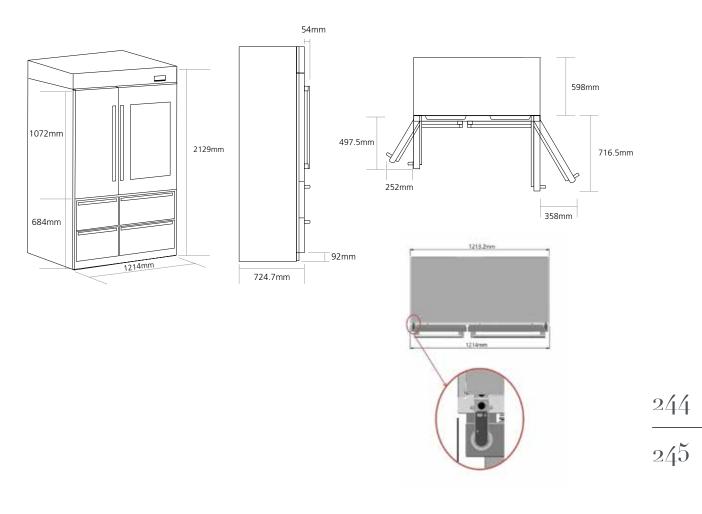


CAFF60 BUILT-IN




NOTE: refer to the installation instructions for the full details

CAFF45GM

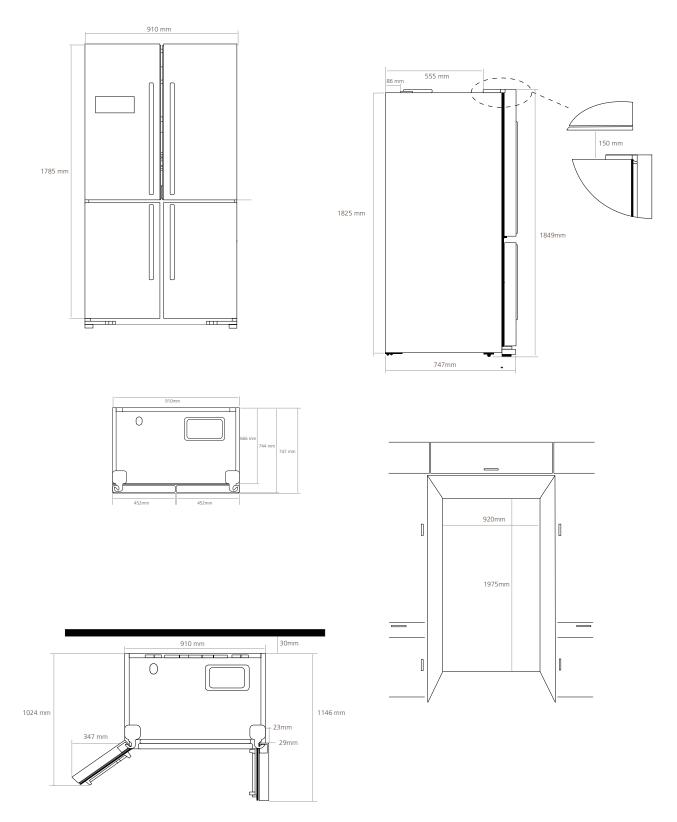



#### FRENCH DOOR FRIDGE FREEZER

CAFF41

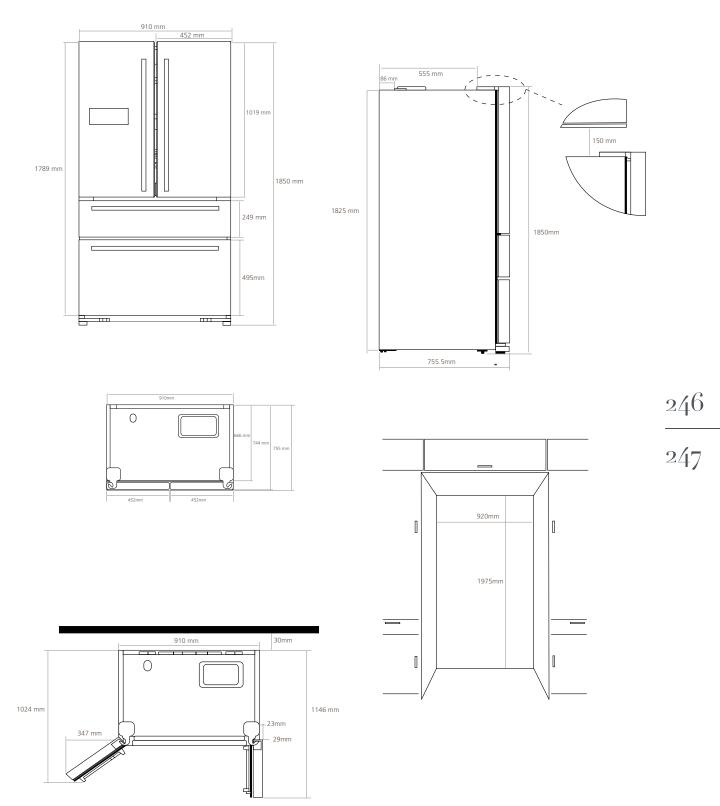


#### SIDE-BY-SIDE FRIDGE FREEZERS






#### FREESTANDING REFRIGERATION

RFF730



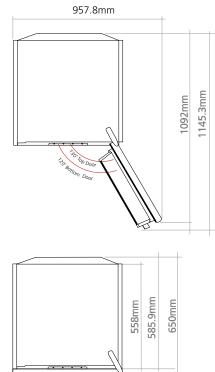



CAFF207SS / CAFF207BK

#### IN-COLUMN INTEGRATED REFRIGERATION


Ri7305 / Ri7300

Ri5505 / Ri5500






RiL1795 / RiF1795




248 249

#### IN-COLUMN INTEGRATED REFRIGERATION

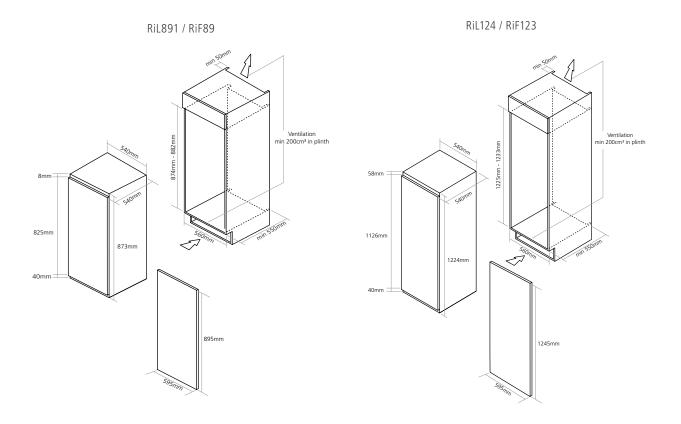


#### **BUILT-UNDER INTEGRATED REFRIGERATION**

RBL4 / RBF4 / RBR6

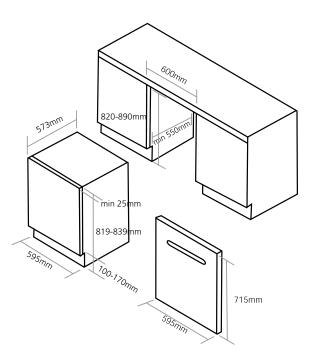


#### UNDERCOUNTER WINE CABINETS


#### Wi6233 / Wi6232



Wi6160




Wi6134 / Wi6133 / Wi6133GM / Wi6132WH / Wi6141 / Wi6140 / Wi6150




250 251

#### UNDERCOUNTER WINE CABINETS


Wi3124 / Wi3123 / Wi3122WH / Wi3150



Wi154




Wi155





•

#### IN-COLUMN WINE CABINETS




WC6520 / WC6510 / WC6500






 $\frac{252}{253}$ 

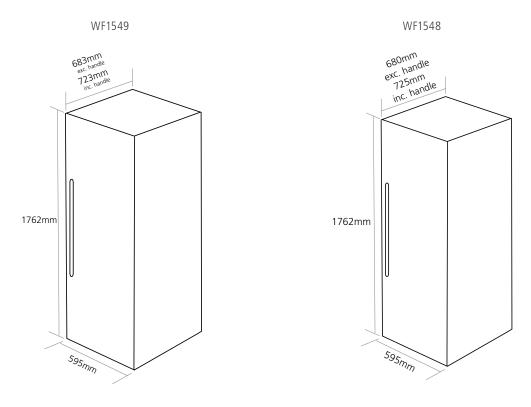


WF333\*



\*Ventilation requirements - Please allow an 127mm gap around the whole appliance when installed next to a wall, unit or in an alcove

#### FULLY INTEGRATED DISHWASHERS

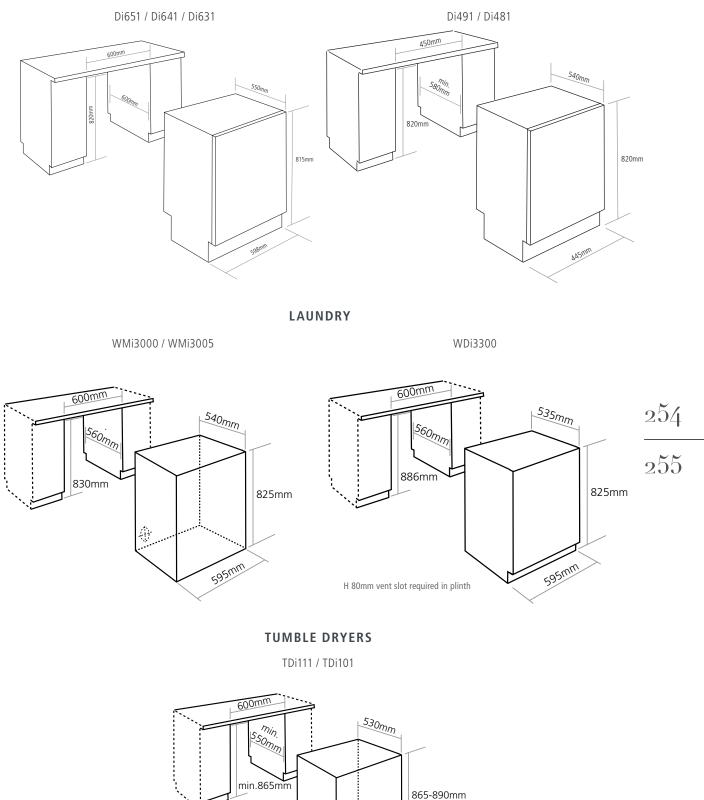

min.865mm 100mm Ducting outlet



## PERFORMANCE GUARANTEED



Here at Caple, performance and reliability are the most important features considered when designing and manufacturing our products. With that in mind, we have developed Caple Care, an after-care solution comprising of three tiers to give you that extra peace of mind.

See page 258 for more extended guarantee information.



#### FREE 2 YEAR GUARANTEE

Across all Caple appliances we offer a free 2 year guarantee on parts and labour. When selecting the components to design your perfect kitchen it is important you have the right assurance without spending an extra penny. All you need to do is visit our website or call us on 0330 123 0998 to register your free 2 year guarantee.



#### **5 YEAR EXTENDED COVER**

Why not extend your cover to 5 years? Caple Care 5 years parts and labour cover means for a one off payment or a monthly fee you can protect your appliance for a total of 5 years [including your free 2 year guarantee] on all parts and labour for any of your Caple appliances. Please visit our website for further details or see page 258.



#### **OUT OF GUARANTEE**

If you choose not to opt for a 5 year extended warranty, don't worry. Here at Caple we offer out of guarantee cover. So, if you are not covered under our extended warranty, for a fixed fee, we can still arrange a service call [including parts and labour] or a replacement product up to 6 years after the purchase date. Terms and conditions apply.

To register your free 2 year guarantee or discuss an extended warranty, call 0330 123 0998 or visit caple.co.uk/register-your-appliance

Lines are open 9am - 5pm Monday to Friday [excluding bank holidays]. Calls maybe recorded and monitored for quality and training purposes. Full Terms and Conditions can be found at www.caple.co.uk.  $\frac{256}{257}$ 

## CAPLE CARE



All Caple appliances come with a 2 year parts and labour guarantee. You can extend this to provide a full **5 years** parts and labour warranty.

#### THE BENEFITS OF TAKING OUT AN **EXTENDED WARRANTY**

The Caple protection plan has been carefully put together so customers who take out the extended cover benefit from:











Up to 5 years parts and labour warranty against breakdown

A nationwide network of Caple approved engineers to undertake repairs in the home Spread the cost over 10months with our monthly payment plan visit www.worldpay.com for full T&Cs

A replacement appliance should the repair of the original be uneconomic or impossible

Access to the Caple UK based contact centre

#### To register your free 2 year guarantee or discuss an extended warranty, call

0330 123 0998

Calls are charged at the local rate- please check with your provider for actual charges.



TO REGISTER YOUR APPLIANCE WITH A FREE 2 YEAR GUARANTEE VISIT CAPLE.CO.UK Subject to terms and conditions



#### Issue: CA0918

Every effort has been made to reproduce colours and materials accurately, however due to the photography and print processes, colour variations may occur.

Due to our continued product development policy, we reserve the right to modify product specifications and/or dimensions without notice.

Please contact your retailer, call Caple direct on 0117 938 1900, email info@caple.co.uk, or visit our website at www.caple.co.uk for further product information.

See more online at **caple.co.uk** or visit our showroom



Fourth Way Avonmouth Bristol BS11 8DW

t: 0117 938 1900 f: 0800 373 163 e: sales@caple.co.uk caple.co.uk

www.facebook.com/CapleUK www.twitter.com/caple www.instagram.com/capleuk



Issue: CA0918